# SIM3964MWH

| | |
|---|---|
| **Product Family** | Hob |
| **Built-in** | Ultra-low profile or Fully Flushed |
| **Dimensions** | 90 cm |
| **Power supply** | Electric |
| **Type** | Induction |
| **EAN code** | 8017709339678 |

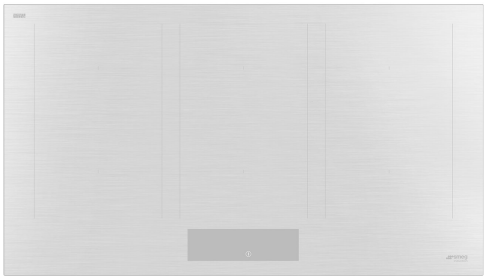

## Aesthetics

| | |
|---|---|
| **Aesthetics** | Classic |
| **Colour** | Matte White |
| **Finishing** | Matte |
| **Material** | Glass |
| **Glass Type** | Eclipse ceramic |
| **Glass edge** | Straight edge |
| **Type of control setting** | EVO Slider |
| **Slider** | Yes |
| **Slider** | Red |
| **Control knobs position** | Front |
| **Logo** | Silk screen |
| **Serigraphy colour** | Black |

## Program / Functions

| | |
|---|---|
| **No. of induction cook zones** | 6 |
| **Time-setting options** | Automatic switch-off |
| **No. of cooking zones with booster** | 6 |
| **No. of Flexible zones** | 3 |
| **Main on/off switch** | Yes |
| **Power levels** | 9 |
| **Auto-Vent 2.0** | Yes |
| **Total no. of cook zones** | 6 |

## Options

| | |
|---|---|
| **Multizone Option** | Yes |
| **Flexible Zone Type** | MultiZone |
| **Standard cut out** | 490x860 mm |
| **Keep warm automatic function** | Yes |
| **Grill function** | Yes |
| **End cooking timer** | 6 |
| **Pause option** | Yes |
| **Minute minder** | 1 |
| **End of cooking acoustic alarm** | Yes |
| **Residual time indicator** | Yes |
| **Limited Power Consumption Mode** | Yes advance |
| **Limited Power Consumption Mode in W** | 2400 a 11100 - step 100 W |
| **Show Room Demo Option** | Yes |
| **Control Lock / Child Safety** | Yes |
| **Bridge option** | Yes |
| **Quick start** | Yes |
| **Rapid level selection** | Yes |

## Technical Features

Front left - Induction - Multizone - 2.10 kW - Booster 2.50 kW - Double booster 3 kW - 22.0x18.0 cm
Rear left - Induction - multizone - 2.10 kW - Booster 2.50 kW - Double booster 3 kW - 22.0x18.0 cm
Front centre - Induction - Multizone - 2.10 kW - Booster 2.50 kW - Double booster 3 kW - 22.0x18.0 cm
Rear centre - Induction - multizone - 2.10 kW - Booster 2.50 kW - Double booster 3 kW - 22.0x18.0 cm
Front right - Induction - Multizone - 2.10 kW - Booster 2.50 kW - 22.0x18.0 cm
Rear right - Induction - multizone - 2.10 kW - Booster 2.50 kW - 22.0x18.0 cm
Multizone left - Booster 3.7 kW - 38.5x23.0 cm
Multizone center - Booster 3.7 kW - 38.5x23.0 cm
Multizone right - Booster 3.7 kW - 38.5x23.0 cm

| | |
|---|---|
| **Automatic setting according to pan dimension** | Yes |
| **Automatic pan detection** | Yes, min 9 cm |
| **Permanent Automatic Pot Detection with indication of the relative control** | Yes |
| **Automatic switch off when overheat** | Yes |
| **Automatic switch off when overflow** | Yes |
| **Residual heat indicator** | Yes |
| **Protection against accidental start up** | Yes |

## Electrical Connection

| | |
|---|---|
| **Nominal power (W)** | 11100 W |
| **Current** | 49 A |
| **Voltage (V)** | 220-240 V |
| **Voltage 2 (V)** | 380-415 V |
| **Type of electric cable** | Three-phase |
| **Type of electric cable** | Single and Double phase |
| **Type of electric cable supplied** | Yes, Single and Double phase |
| **Frequency (Hz)** | 50/60 Hz |
| **Power supply cable length** | 120 cm |
| **Terminal Box** | 5 poles |

| | |
|---|---|
| **Plug** | No |

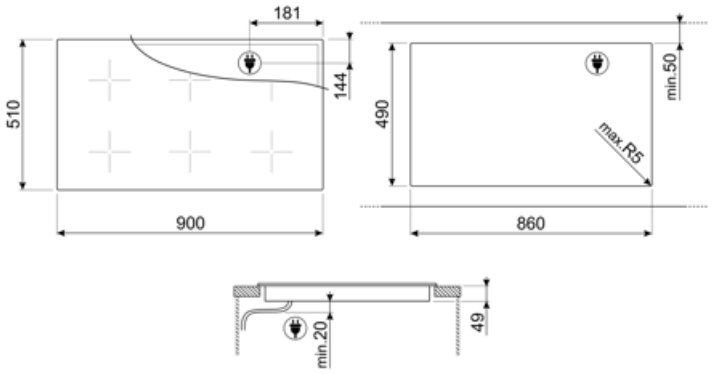

## Compatible Accessories

**SCRP**

Induction and ceramic hobs and teppanyaki scraper

## Alternative products

**SIM3964D**

**Colour:** Black

**SIM3964MB**

**Colour:** Matte Black

**SIM3964N**

**Colour:** Matte Black

## Symbols glossary

Permanent auto pot detection

Power booster: option allows the zone to work at full power when very intense cooking is necessary.

Evolution Slider totally Back-lighted ghost effect

Perfect fit in a 90 cm cabinet

Grill function

Overheat protection: The safety system that automatically turns off the hob in case of overheating of the control unit.

Multizone: allows several pans to be used at once, large or small, offering freedom of placement and greater flexibility

PAUSE_72dpi

Quick Start function: the chosen temperature is reached faster. The heating element works at maximum power until the right temperature is reached.

Time elapsed: shows how long the cooking zone has been in use.

TWIN_ZONE_72dpi

Possibility to set the maximum power absorbion of the hob

Connection between hob and hood

Child lock: some models are fitted with a device to lock the programme/cycle so it cannot be accidentally changed.

The slider control panel allows you to adjust the power simply by passing your finger across the touch device.

Darkness becomes light

Keep warm function: Keep warm function keeps the cooked food heated. In this mode the heating zone operates at a minimum capacity for 120 minutes and then turns off automatically.

Induction: The work of these hobs is based on the principle of electromagnetic induction. The heat is generated directly in the bottom of the pan during its contact with the hob.

Overfill protection: The special overfill protection shuts down the stove in the presence of overflow of liquids.

Quick selection, with one touch cooking begins at the highest level, then automatically reduces after time. Ideal for dishes that require quick boiling and then continued cooking without constant control (eg beef broth).

Indication of residual heat: After the glass ceramic hob is switched off the residual heat indicator shows which of the heating zones still remains hot. When the temperature drops below 60 ° C, the indicator goes out.

Timer: All ceramic hobs have a timer which automatically ends cooking after a preset time.

Min diameter pot detection of 9 cm