
SIM3964N

Product Family	Hob
Built-in type	Ultra-low profile or Fully Flushed
Dimensions	90 cm
Power supply	Electric
Type	Induction
EAN code	8017709358105

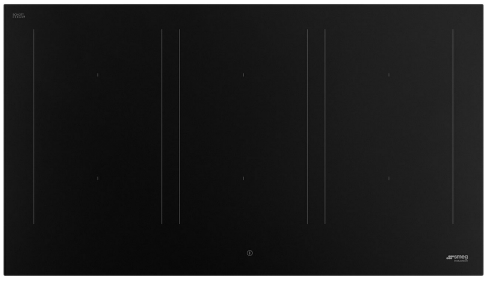

Aesthetics

Aesthetic	Classic
Colour	Matte black
Finishing	Matte
Material	Glass
Glass type	Matte ceramic
Glass edge	Straight edge
Type of control setting	Touch control back-lighted White
Slider	Yes
Slider	White
Control knob position	Front
Logo	Silk screen
Serigraphy colour	Black

Program / Functions

No. of induction cook zones	6
Time-setting options	Automatic Shutdown
No. of cooking zones with booster	6
No. of Flexible zones	3
Main on/off switch	Yes
Power levels	9
Auto-vent 2.0	Yes
Total no. of cook zones	6

Options



Multizone Option	Yes
Flexible Zone Type	MultiZone
Standard cut out	490x860 mm
Keep warm automatic function	Yes
Grill function	Yes
End cooking timer	6
Pause option	Yes
Minute minder	1
End of cooking alarm	Yes
Residual time indicator	Yes
Limited Power Consumption Mode	Advanced Eco Logic
Limited Power Consumption Mode in W	2400 a 11100 - step 100 W
Showroom Demo Option	Yes
Control Lock / Child Safety	Yes
Bridge option	Yes
Quick start	Yes
Rapid level selection	Yes

Technical Features




Front-left - Induction - Multizone - 2.10 kW - Booster 2.50 kW - Double booster 3 kW - 22.0x18.0 cm
Rear-left - Induction - Multizone - 2.10 kW - Booster 2.50 kW - Double booster 3 kW - 22.0x18.0 cm
Front-centre - Induction - Multizone - 2.10 kW - Booster 2.50 kW - Double booster 3 kW - 22.0x18.0 cm
Rear-centre - Induction - Multizone - 2.10 kW - Booster 2.50 kW - Double booster 3 kW - 22.0x18.0 cm
Front-right - Induction - Multizone - 2.10 kW - Booster 2.50 kW - Double booster 3 kW - 22.0x18.0 cm
Rear-right - Induction - Multizone - 2.10 kW - Booster 2.50 kW - Double booster 3 kW - 22.0x18.0 cm
Multizone left - Booster 3.70 kW - 36x21 cm
Multizone center - Booster 3.70 kW - 36x21 cm
Multizone right - Booster 3.70 kW - 36x21 cm

Automatic setting according to pan dimension	Yes
pan detection	Yes, min 9 cm
Permanent Automatic Pot Detection with indication of the relative control	Yes
Automatic switch off when overheat	Yes
Automatic switch off when overflow	Yes
Residual heat indicator	Yes
Protection against accidental start up	Yes

Electrical Connection

Electrical connection rating (W)	11100 W
Current	49 A
Voltage (V)	220-240 V
Voltage 2 (V)	380-415 V
Type of electric cable	Three-phase
Type of electric cable	Single and Double phase
Type of electric cable supplied	Yes, Single and Double phase
Frequency (Hz)	50/60 Hz
Power supply cable length	120 cm
Terminal box	5 poles
Plug	No

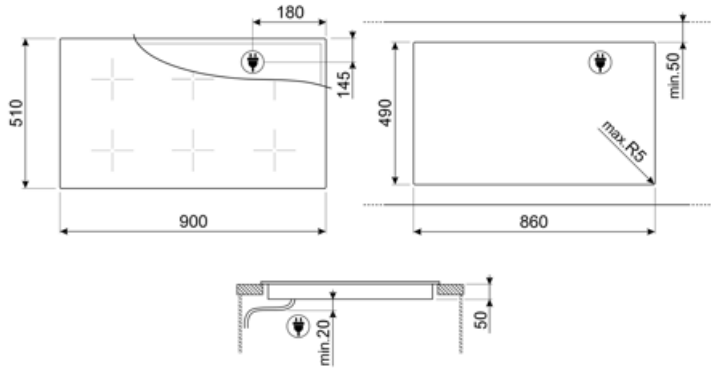
180
145
510
900
490
min.50
max.R5
860
min.20
50

Compatible Accessories



GRILLPLATE

Universal griddle for induction, gas, ceramic and electric hobs. Non-stick surface ideal for cooking meat, cheese and vegetables. Dimensions: 410 x 240 mm.



TPKPLATE

Universal plate for induction, gas, ceramic and electric hobs. Non-stick surface ideal for cooking fish, eggs and vegetables. Dimensions: 410 X 240 mm.



SCRP

Induction and ceramic hobs and teppanyaki scraper

Alternative products



SIM3964D

Colour: Black



SIM3964MB

Colour: Matte black

SIM3964MWH

Colour: Matte white

Symbols glossary



Permanent auto pot detection



Connection between hob and hood



Power booster: option allows the zone to work at full power when very intense cooking is necessary.



Child lock: some models are fitted with a device to lock the programme/cycle so it cannot be accidentally changed.



Evolution Slider totally Back-lighted ghost effect



The slider control panel allows you to adjust the power simply by passing your finger across the touch device.



Perfect fit in a 90 cm cabinet



Grill function



Keep warm function: Keep warm function keeps the cooked food heated. In this mode the heating zone operates at a minimum capacity for 120 minutes and then turns off automatically.



Overheat protection: The safety system that automatically turns off the hob in case of overheating of the control unit.



Induction: The work of these hobs is based on the principle of electromagnetic induction. The heat is generated directly in the bottom of the pan during its contact with the hob.



Multizone: allows several pans to be used at once, large or small, offering freedom of placement and greater flexibility



Overfill protection: The special overfill protection shuts down the stove in the presence of overflow of liquids.



PAUSE_72dpi



Quick selection, with one touch cooking begins at the highest level, then automatically reduces after time. Ideal for dishes that require quick boiling and then continued cooking without constant control (eg beef broth).



Quick Start function: the chosen temperature is reached faster. The heating element works at maximum power until the right temperature is reached.



Indication of residual heat: After the glass ceramic hob is switched off the residual heat indicator shows which of the heating zones still remains hot. When the temperature drops below 60 ° C, the indicator goes out.



Time elapsed: shows how long the cooking zone has been in use.



Timer: All ceramic hobs have a timer which automatically ends cooking after a preset time.



TWIN_ZONE_72dpi



Min diameter pot detection of 9 cm.



Possibility to set the maximum power absorbion of the hob.