
SIM3964N

Familie	Kookplaat
Inbouw	Vlak opbouw of vlak inbouw
Afmeting	90 cm
Voeding	Elektrisch
Type	Inductie
EAN-code	8017709358105

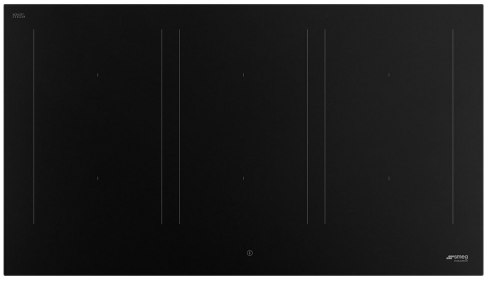

Design

Esthetiek	Classici
Kleur	Matt Black
Afwerking	Mat
Materiaal	Glas
Type glas	Matte ceramic
Glazen rand	Rechte rand
Type bediening	EVO Slider
Slider	Ja
Slider	Wit
Positie bediening	Voor
Logo	Geëtst
Kleur serigrafie	Zwart

Program / Functions

Aantal inductiekookzones	6
Opties tijdprogrammering	Automatische uitschakeling
Aantal kookzones met booster	6
Aantal Multizones	3
Hoofdtoets aan/uit	Ja
Vermogenniveaus	9
Auto-vent 2.0	Ja
Totaal aantal kookzones	6

Opties

Multizone optie	Ja
Flexible Zone Type	MultiZone
Worktop Cut-Out	490x860 mm
Warmhoudfunctie	Ja
Grill functie	Ja
Automatische uitschakeling	6
Pauze optie	Ja
Timer	1
Akoestisch signaal einde kooktijd	Ja
Resttijd indicator	Ja
ECO-Logic optie	Ja, Advance
ECO-Logic optie - stappen	2400 a 11100 - step 100 W
Showroom demo optie	Ja
Kinderbeveiliging	Ja
TwinZone optie	Ja
Quick start	Ja
Snelle selectie niveaus	Ja


Technische specificaties

Linksvoor - Inductie - Multizone - 2.10 kW - Booster 2.50 kW - Double booster 3 kW - 22.0x18.0 cm
Linksachter - Inductie - Multizone - 2.10 kW - Booster 2.50 kW - Double booster 3 kW - 22.0x18.0 cm
Middenvoor - Inductie - Multizone - 2.10 kW - Booster 2.50 kW - Double booster 3 kW - 22.0x18.0 cm
Middenachter - Inductie - Multizone - 2.10 kW - Booster 2.50 kW - Double booster 3 kW - 22.0x18.0 cm
Rechtsvoor - Inductie - Multizone - 2.10 kW - Booster 2.50 kW - Double booster 3 kW - 22.0x18.0 cm
Rechtsachter - Inductie - Multizone - 2.10 kW - Booster 2.50 kW - Double booster 3 kW - 22.0x18.0 cm
Multizone left - Booster 3.70 kW - 36x21 cm
Multizone center - Booster 3.70 kW - 36x21 cm
Multizone right - Booster 3.70 kW - 36x21 cm

Automatische herkenning panafmeting	Ja
Automatische panherkenning	minimaal 9 cm
Permanente automatische pandetectie met indicatie van de relatieve controle	Ja
Automatische stop bij oververhitting	Ja
Automatisch uitschakelen i.g.v. overkoken	Ja
Restwarmte indicator	Ja
beveiliging tegen onbedoeld inschakeling	Ja

Elektrische aansluiting

Aansluitwaarde	11100 W
Stroom	49 A
Spanning (V)	220-240 V
Spanning 2 (V)	380-415 V
Type stroomkabel	Driefasig
Type stroomkabel	Enkele en dubbele fase
Type of electric cable supplied	Yes, Single and Double phase
Frequentie	50/60 Hz
Lengte voedingskabel	120 cm
Connection box	5 polig
Stekker	Nee

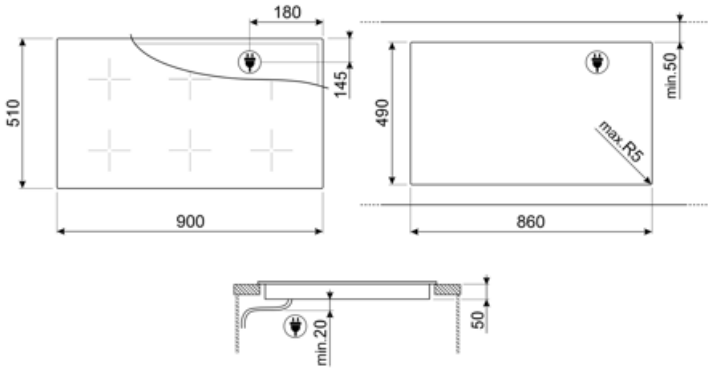
180
145
510
900
490
min.50
max.R5
860
50
min.20

Compatibele Accessoires



GRILLPLATE

Universal griddle for induction, gas, ceramic and electric hobs. Non-stick surface ideal for cooking meat, cheese and vegetables. Dimensions: 410 x 240 mm.



TPKPLATE

Universal plate for induction, gas, ceramic and electric hobs. Non-stick surface ideal for cooking fish, eggs and vegetables. Dimensions: 410 X 240 mm.



SCRP

Inductie- en keramische kookplaten en teppanyaki-schraper

Alternative products



SIM3964D

Kleur: Zwart



SIM3964MB

Kleur: Matt Black

SIM3964MWH

Kleur: Matt White

Symbols glossary



Permanent auto pot detection



Powerbooster: optie zorgt ervoor dat de zone op vol vermogen werkt wanneer zeer intensief koken nodig is.



The slider control panel allows you to adjust the power simply by passing your finger across the touch device.



Overheat protection: The safety system that automatically turns off the hob in case of overheating of the control unit.



Multizone: allows several pans to be used at once, large or small, offering freedom of placement and greater flexibility



All cooking zones can be reduced to the minimum power level, so the hob can be left unattended for a short period without food overcooking or burning. Then just press again this function, the previously set power levels can be reactivated.



Quick Start function: the chosen temperature is reached faster. The heating element works at maximum power until the right temperature is reached.



Time elapsed: shows how long the cooking zone has been in use.



TWIN_ZONE_72dpi



Min diameter pot detection of 9 cm.



Perfect fit in a 90 cm cabinet



Connection between hob and hood



Kinderslot: sommige modellen zijn voorzien van een apparaat om het programma / de cyclus te vergrendelen zodat het niet kan per ongeluk veranderd



This function allows you to keep cooked food warm without burner it



Induction: The work of these hobs is based on the principle of electromagnetic induction. The heat is generated directly in the bottom of the pan during its contact with the hob.



Overfill protection: The special overfill protection shuts down the stove in the presence of overflow of liquids.



Quick selection, with one touch cooking begins at the highest level, then automatically reduces after time. Ideal for dishes that require quick boiling and then continued cooking without constant control (eg beef broth).



Indication of residual heat: After the glass ceramic hob is switched off the residual heat indicator shows which of the heating zones still remains hot. When the temperature drops below 60 ° C, the indicator goes out.



Timer: All ceramic hobs have a timer which automatically ends cooking after a preset time.



Grill function



Possibility to set the maximum power absorbion of the hob.



Evolution Slider totally Back-lighted ghost effect