
SIMU315D

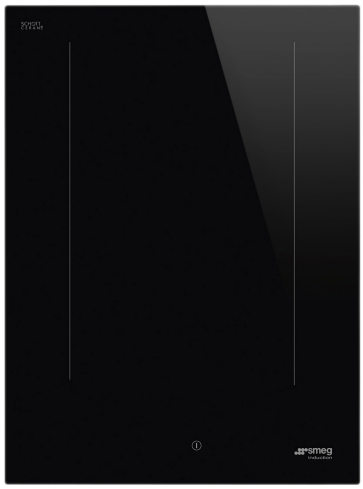

Product Family	Hob
Built-in type	Ultra-low profile or Fully Flushed
Dimensions	15"
Power supply	Electric
Type	Induction
EAN code	8017709344061

Aesthetics

Aesthetic	SPR
Colour	Black
Finishing	Glass
Material	Glass
Glass type	ceramic Eclipse
Glass edge	Straight edge
Type of control setting	EVO Slider
Slider	Yes
LED colours	White
Control knob position	Front
Logo	Silk screen
Serigraphy colour	Grey

Program / Functions

No. of induction cook zones	2
Time-setting options	Spegnimento automatico
No. of cooking zones with booster	2
No. of Flexible zones	2
Main on/off switch	Yes
Power levels	9
Total no. of cook zones	2

Options

Multizone Option	Yes	**Residual time indicator**	Yes
Flexible Zone Type	MultiZone	**Limited Power Consumption Mode**	Yes
Double Booster	Yes	**Limited Power Consumption Mode in W**	2400 a 7400 - step 100 W
Keep warm automatic function	Yes	**Showroom Demo Option**	Yes
Grill function	Yes	**Control Lock / Child Safety**	Yes
End cooking timer	4	**Bridge option**	Yes
Pause option	Yes	**Quick start**	Yes
Minute minder	1	**Rapid level selection**	Yes
End of cooking alarm	Yes		


Technical Features

Front-centre - Induction - Multizone - 2.10 kW - Booster 2.50 kW - Double booster 3000 kW - 22x18 cm
Rear-centre - Induction - Multizone - 2.10 kW - Booster 2.50 kW - Double booster 3000 kW - 22x18 cm
38.5x23.0 cm
Multizone center - Booster 3700 kW
38.5x23.0 cm

Automatic setting according to pan dimension	Yes	**Automatic switch off when overflow**	Yes
pan detection	Yes, min 9 cm	**Residual heat indicator**	Yes
Permanent Automatic Pot Detection with indication of the relative control	Yes	**Protection against accidental start up**	Yes
Automatic switch off when overheat	Yes		

Electrical Connection

Electrical connection rating (W)	3700 W	**Frequency (Hz)**	60 Hz
Current	16 A	**Power supply cable length**	47 1/4 "
Voltage (V)	240 V	**Terminal box**	5 poles
Voltage 2 (V)	208 V	**Plug**	No
Type of electric cable	Single phase		

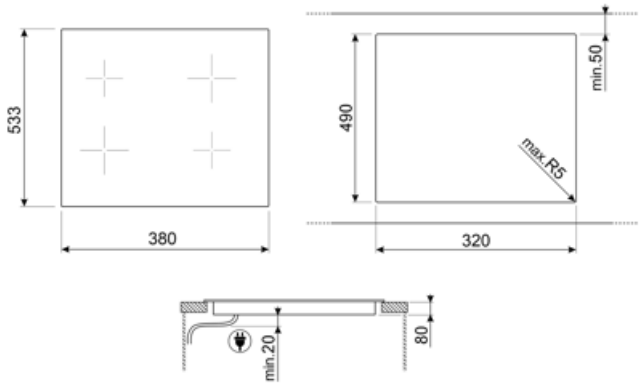
533
380
490
min.50
max.R5
320
min.20
80

Compatible Accessories



SCRP

Non-scratch hob scraper - suitable for induction and ceramic hobs

Symbols glossary



Permanent auto pot detection



Child lock: some models are fitted with a device to lock the programme/cycle so it cannot be accidentally changed.



The slider control panel allows you to adjust the power simply by passing your finger across the touch device.



Darkness becomes light



This function allows you to keep cooked food warm without burner it



Induction: The work of these hobs is based on the principle of electromagnetic induction. The heat is generated directly in the bottom of the pan during its contact with the hob.



Overfill protection: The special overfill protection shuts down the stove in the presence of overflow of liquids.



Quick selection, with one touch cooking begins at the highest level, then automatically reduces after time. Ideal for dishes that require quick boiling and then continued cooking without constant control (eg beef broth).



Indication of residual heat: After the glass ceramic hob is switched off the residual heat indicator shows which of the heating zones still remains hot. When the temperature drops below 60 ° C, the indicator goes out.



Timer: All ceramic hobs have a timer which automatically ends cooking after a preset time.



Grill function



Power booster: option allows the zone to work at full power when very intense cooking is necessary.



Evolution Slider totally Back-lighted ghost effect



Additional maximum power level for a better energy consumption



ECO-logic: option allows you to restrict the power limit of the appliance real energy saving.



Overheat protection: The safety system that automatically turns off the hob in case of overheating of the control unit.



Multizone: allows several pans to be used at once, large or small, offering freedom of placement and greater flexibility



All cooking zones can be reduced to the minimum power level, so the hob can be left unattended for a short period without food overcooking or burning. Then just press again this function, the previously set power levels can be reactivated.



Quick Start function: the chosen temperature is reached faster. The heating element works at maximum power until the right temperature is reached.



Time elapsed: shows how long the cooking zone has been in use.



TWIN_ZONE_72dpi



Min diameter pot detection of 9 cm