

SIMU330D





Product Family Built-in type

Dimensions Power supply Type

EAN code

Hob

Ultra-low profile

70/75 cm Mixed

Induction

8017709328924



Aesthetics







AestheticUniversaleColourBlackFinishingGlassMaterialGlass

Glass type ceramic Eclipse
Glass edge Straight edge
Type of control setting EVO Slider

SliderYesLED coloursWhiteControl knob positionFrontSerigraphy colourGrey

Programs / Functions



Total no. of cook zones 4
No. of induction cook zones 4

Time-setting options Spegnimento automatico

No. of cooking zones with booster4No. of Flexible zones2Main on/off switchYesPower levels9

Options

SMEG SPA 2024-05-20







Multizone Option



















14

Flexible Zone Type Worktop Cut-Out Auto Multizone Yes

Double Booster Yes Keep warm automatic Yes

function

Grill function Yes End cooking timer 4 Pause option Yes Minute minder 1

Yes End of cooking alarm Yes Residual time indicator MultiZone Yes 490x745 mm **Limited Power** Yes

Consumption Mode

Limited Power 2400 a 7400 - step 100 W

Yes

Consumption Mode in W Showroom Demo Option Yes Control Lock / Child Yes

Safety

Bridge option Yes Quick start Yes Rapid level selection Yes

Technical Features











Front-left - Induction - Multizone - 2.10 kW - Booster 2.50 kW - Double booster 3.00 kW - 24.0x18.0 cm

Rear-left - Induction - Multizone - 2.10 kW - Booster 3.00 kW - Double booster 3.00 kW - 24.0x18.0 cm

Rear-centre - Induction - Single - 2.30 kW - Booster 3.00 kW - Ø 20 cm Front-right - Induction - Single - 1.40 kW - Booster 2.10 kW - Ø 16 cm

Multizone left - Booster 3.70 kW - 38.5x23.0 cm

Automatic setting according to pan

dimension

pan detection Yes, min 9 cm

Permanent Automatic Pot Detection with indication of the relative

control

Automatic switch off

when overheat

Yes

Yes

Yes

Automatic switch off when overflow

Residual heat indicator Yes Protection against Yes

accidental start up

Electrical Connection

Electrical connection

rating (W)

Current 33 A Voltage (V) 240 V

Type of electric cable

7400 W

Single phase

Frequency (Hz) Power supply cable

length

Terminal box


60 Hz

47 1/4 "

5 poles

SMEG SPA 2024-05-20



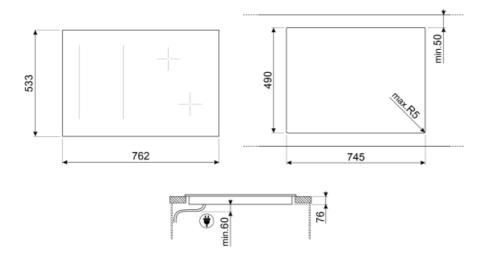

SMEG SPA 2024-05-20



Not included accessories



SCRP

Non-scratch hob scraper - suitable for induction and ceramic hobs



TPK

Stainless steel grill plate to cook Teppanyaki dishes

SMEG SPA 2024-05-20



Symbols glossary (TT)

Min diameter pot detection of 9 cm

Ō	Automatic merge of zones for a bigger area	O	Permanent auto pot detection
P	Power booster: option allows the zone to work at full power when very intense cooking is necessary.		Ultra-low profile: Installation of product with flat edge - height of 1 mm.
ß	Child lock: some models are fitted with a device to lock the programme/cycle so it cannot be accidentally changed.	EVO slider	Evolution Slider totally Back-lighted ghost effect
9	The slider control panel allows you to adjust the power simply by passing your finger across the touch device.	BOOST	Additional maximum power level for a better energy consumption
iogic logic	ECO-logic: option allows you to restrict the power limit of the appliance real energy saving.	₩	This function allows you to keep cooked food warm without burner it
°C∓	Overheat protection: The safety system that automatically turns off the hob in case of overheating of the control unit.		Induction: The work of these hobs is based on the principle of electromagnetic induction. The heat is generated directly in the bottom of the pan during its contact with the hob.
‡ Ó	Multizone: allows several pans to be used at once, large or small, offering freedom of placement and greater flexibility	⊕ ₩ 	Overfill protection: The special overfill protection shuts down the stove in the presence of overflow of liquids.
(1)	All cooking zones can be reduced to the minimum power level, so the hob can be left unattended for a short period without food overcooking or burning. Then just press again this function, the previously set power levels can be reactivated.	† P 14 10 15	Quick selection, with one touch cooking begins at the highest level, then automatically reduces after time. Ideal for dishes that require quick boiling and then continued cooking without constant control (eg beef broth).
4	Quick Start function: the chosen temperature is reached faster. The heating element works at maximum power until the right temperature is reached.	H	Indication of residual heat: After the glass ceramic hob is switched off the residual heat indicator shows which of the heating zones still remains hot. When the temperature drops below 60 ° C, the indicator goes out.
()	Time elapsed: shows how long the cooking zone has been in use.	()	Timer: All ceramic hobs have a timer which automatically ends cooking after a preset time.
	TWIN_ZONE_72dpi	Ē	Grill function

SMEG SPA 2024-05-20

Darkness becomes light