

SIMU336D



Product family

Installation Proud or flush mounted

Cooktop

Dimensions 36"
Power supply Mixed
Type Induction

EAN code 8017709328931



Aesthetic







AestheticsUniversalColorBlackFinishingGlassMaterialGlass

Glass edge Eclipse ceramic
Straight edge

Control setting type Touch control - Backlit white

SliderYesSliderWhiteControls positionFrontSilkscreen colorGray

Program / Functions



Cooking zones 6

Time-setting options Automatic switch-off

Cooking zones with Booster 6
No. of Flexible zones 3
Main on/off switch Yes
Power levels 9
Cooking zones 5

Options

























Multi-zone Yes Flexible zone MultiZone Multi-zone Yes Multi-zone Yes Keep-warm automatic Yes function **Grill function** Yes

End cooking timer 6 Pause option Yes Minute minder 1

End-of-cooking acoustic Yes alarm

Residual time indicator Yes Limited power Yes

consumption option

Limited Power 2400 a 11100 - step 100

Consumption Mode in W Showroom mode Yes Child safety lock Yes Twin-zone option Yes Quick start Yes Quick level selection Yes

Technical Features













Front-left - Induction - Multizone - 2.10 kW - Booster 2.50 kW - Double booster 3.00 kW - 24.0x18.0 cm

Rear-left - Induction - Multizone - 2.10 kW - Booster 2.50 kW - Double booster 3.00 kW - 24.0x18.0 cm

Front-center - Induction - Multizone - 2.10 kW - Booster 2.50 kW - Double booster 3.00 kW - 24.0x18.0 cm

Rear-center - Induction - Multizone - 2.10 kW - Booster 2.50 kW - Double booster 3.00 kW - 24.0x18.0 cm

Front-right - Induction - Multizone - 2.10 kW - Booster 2.50 kW - Double booster 3.00 kW - 24.0x18.0 cm Rear-right - Induction - Multizone - 2.10 kW - Booster 2.50 kW - Double booster 3.00 kW - 24.0x18.0 cm

Multizone left - Booster 3.70 kW - 38.5x23.0 cm

Multizone center - Booster 3.70 kW - 38.5x23.0 cm

Multizone right - Booster 3.70 kW - 38.5x23.0 cm

Automatic pan diameter Yes

adjustment

Automatic pot detection 3.5" minimum

Permanent Automatic Yes Pot Detection with

indication of the relative

control

Automatic switch-off in Yes

case of over-heating

Automatic switch-off in Yes case of overflow

Residual heat indicator Yes Protection from

accidental start


Yes

Flectrical Connection

Nominal power 11100 W Current 49 A Voltage 240 V Voltage 2 (V) 208 V

Electric cable type Single phase 60 Hz Frequency Power cord length 47 1/4 " Terminal box 5 poles



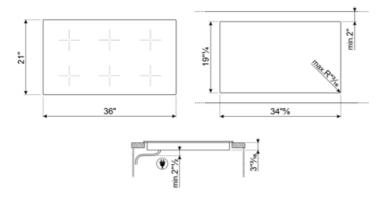



Compatible Accessories



SCRP

Induction and ceramic hobs and teppanyaki scraper



TPK

Stainless steel grill plate to cook Teppanyaki dishes



Symbols glossary

O	Automatic merge of zones for a bigger area	0	
P	Power booster: option allows the zone to work at full power when very intense cooking is necessary.	S	Child lock: some models are fitted with a device to lock the programme/cycle so it cannot be accidentally changed.
9	The slider control panel allows you to adjust the power simply by passing your finger across the touch device.	ECO logic	ECO-logic: option allows you to restrict the power limit of the appliance real energy saving.
"	Keep warm function: Keep warm function keeps the cooked food heated. In this mode the heating zone operates at a minimum capacity for 120 minutes and then turns off automatically.	STOP °C∓	Overheat protection: The safety system that automatically turns off the hob in case of overheating of the control unit.
	Induction: The work of these hobs is based on the principle of electromagnetic induction. The heat is generated directly in the bottom of the pan during its contact with the hob.	;⇔	Multizone: allows several pans to be used at once, large or small, offering freedom of placement and greater flexibility
Ē		EVO slider	Evolution Slider totally Back-lighted ghost effect
	Overfill protection: The special overfill protection shuts down the stove in the presence of overflow of liquids.	(1)	PAUSE_72dpi
† P 14 110 15	Quick selection, with one touch cooking begins at the highest level, then automatically reduces after time. Ideal for dishes that require quick boiling and then continued cooking without constant control (eg beef broth).	•	Quick Start function: the chosen temperature is reached faster. The heating element works at maximum power until the right temperature is reached.
Н	Indication of residual heat: After the glass ceramic hob is switched off the residual heat indicator shows which of the heating zones still remains hot. When the temperature drops below 60 ° C, the indicator goes out.	<u>()</u>	Time elapsed: shows how long the cooking zone has been in use.

Darkness becomes light

Timer: All ceramic hobs have a timer which

automatically ends cooking after a preset time.

SMEG SPA 8/29/2025

TWIN_ZONE_72dpi

energy consumption

Additional maximum power level for a better



Benefit (TT)

Induction hobs

Fast cooking and precise temperature control

Glass

Brightness and elegance in the kitchen: the acid-etched glass gives the surface a refined, modern look that enhances the space.

Eclipse

Minimal design and high performance meet in Eclipse black glass, with no visible screen printing

Evo Slider controls visible only when in use: an elegant touch that disappears after cooking, for a clean aesthetic

Control knob position frontal

Instant and intuitive control thanks to front controls, easily accessible for practical use.

Keep Warm function

Dishes always served at the right temperature, even after cooking, thanks to the Keep Warm function

Energy consumption optimization with Eco-Logic Advance, allowing absorption limitation from 2.4 kW in 0.1 kW steps

Nine power levels and Boost function for optimal cooking performance

MultiZone

Large surface created by joining two contiguous zones, perfect for large dishes

In addition to their sleek aesthetics and contemporary design, Smeg induction hobs are equipped with innovative technologies. The Multizone function guarantees maximum flexibility in the use of the hob and endless cooking possibilities, expanding the cooking area to suit the shape and size of different pans

Grill function

Even heat distribution with the grill function, requiring just two minutes of preheating for perfectly grilled dish

Permanent Automatic Pot Detection with indication of the relative control

Automatic activation of the correct cooking zone with Autopot Detection, recognizing the pot without user intervention

Backlit controls with white LEDs

Backlit controls with white LEDs for refined aesthetics and discreet visibility