
SIMU336D

Product family	Cooktop
Installation	Proud or flush mounted
Dimensions	36"
Power supply	Mixed
Type	Induction
EAN code	8017709328931

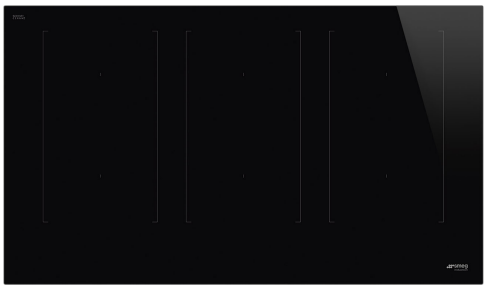

Aesthetic

Aesthetics	Professional
Color	Black
Finishing	Glass
Material	Glass
Glass	Eclipse ceramic
Glass edge	Straight edge
Control setting type	Touch control - Backlit white
Slider	Yes
Slider	White
Controls position	Front
Logo	Silkscreened
Silkscreen color	Gray

Program / Functions

Cooking zones	6
Time-setting options	Automatic switch-off
Cooking zones with Booster	6
No. of Flexible zones	3
Main on/off switch	Yes
Power levels	9
Cooking zones	5

Options

Multi-zone	Yes
Flexible zone	MultiZone
Multi-zone	Yes
Keep-warm automatic function	Yes
Grill function	Yes
End cooking timer	6
Pause option	Yes
Minute minder	1
End-of-cooking acoustic alarm	Yes
Residual time indicator	Yes
Limited power consumption option	Yes
Limited Power Consumption Mode in W	2400 a 11100 - step 100 W
Showroom mode	Yes
Child safety lock	Yes
Twin-zone option	Yes
Quick start	Yes
Quick level selection	Yes

Technical Features


Front-left - Induction - Multizone - 2.10 kW - Booster 2.50 kW - Double booster 3.00 kW - 24.0x18.0 cm
Rear-left - Induction - Multizone - 2.10 kW - Booster 2.50 kW - Double booster 3.00 kW - 24.0x18.0 cm
Front-center - Induction - Multizone - 2.10 kW - Booster 2.50 kW - Double booster 3.00 kW - 24.0x18.0 cm
Rear-center - Induction - Multizone - 2.10 kW - Booster 2.50 kW - Double booster 3.00 kW - 24.0x18.0 cm

Front-right - Induction - Multizone - 2.10 kW - Booster 2.50 kW - Double booster 3.00 kW - 24.0x18.0 cm
Rear-right - Induction - Multizone - 2.10 kW - Booster 2.50 kW - Double booster 3.00 kW - 24.0x18.0 cm
Multizone left - Booster 3.70 kW - 38.5x23.0 cm
Multizone center - Booster 3.70 kW - 38.5x23.0 cm
Multizone right - Booster 3.70 kW - 38.5x23.0 cm

Automatic pan diameter adjustment	Yes
Automatic pot detection	3.5" minimum
Permanent Automatic Pot Detection with indication of the relative control	Yes
Automatic switch-off in case of over-heating	Yes
Automatic switch-off in case of overflow	Yes
Residual heat indicator	Yes
Protection from accidental start	Yes

Electrical Connection

Nominal power	11100 W
Current	49 A
Voltage	240 V
Voltage 2 (V)	208 V
Electric cable type	Single phase
Frequency	60 Hz
Power cord length	47 1/4 "
Terminal box	5 poles
Plug	No

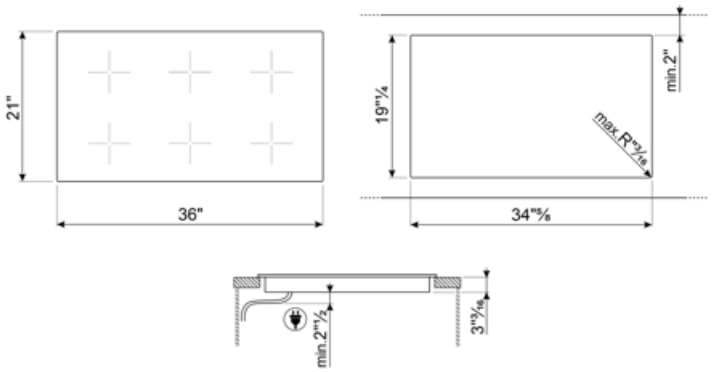
21"
36"
19"¾
min.2"
max.R"⅛
34"⅝
min.2"½
3"⅜

Compatible Accessories



SCRP

Induction and ceramic hobs and teppanyaki scraper

Symbols glossary



Permanent auto pot detection



Child lock: some models are fitted with a device to lock the programme/cycle so it cannot be accidentally changed.



The slider control panel allows you to adjust the power simply by passing your finger across the touch device.



Darkness becomes light



Grill function



Overheat protection: The safety system that automatically turns off the hob in case of overheating of the control unit.



Multizone: allows several pans to be used at once, large or small, offering freedom of placement and greater flexibility



PAUSE_72dpi



Quick Start function: the chosen temperature is reached faster. The heating element works at maximum power until the right temperature is reached.



Time elapsed: shows how long the cooking zone has been in use.



TWIN_ZONE_72dpi



Power booster: option allows the zone to work at full power when very intense cooking is necessary.



Evolution Slider totally Back-lighted ghost effect



Additional maximum power level for a better energy consumption



ECO-logic: option allows you to restrict the power limit of the appliance real energy saving.



Keep warm function: Keep warm function keeps the cooked food heated. In this mode the heating zone operates at a minimum capacity for 120 minutes and then turns off automatically.



Induction: The work of these hobs is based on the principle of electromagnetic induction. The heat is generated directly in the bottom of the pan during its contact with the hob.



Overfill protection: The special overfill protection shuts down the stove in the presence of overflow of liquids.



Quick selection, with one touch cooking begins at the highest level, then automatically reduces after time. Ideal for dishes that require quick boiling and then continued cooking without constant control (eg beef broth).



Indication of residual heat: After the glass ceramic hob is switched off the residual heat indicator shows which of the heating zones still remains hot. When the temperature drops below 60 ° C, the indicator goes out.



Timer: All ceramic hobs have a timer which automatically ends cooking after a preset time.



Min diameter pot detection of 9 cm.