SISL7955MB

Product familie	Kookplaat
Type	Tussenbouw
Afmeting	90 cm
Voeding	Elektrisch
Type	Inductie
EAN-code	8017709357184



Design

Design	Isola
Serie	Alta Pro
Kleur	Black with matt black frame
Perimeter lighting	Yes
Light color temperature scale (K)	4000 K
Afwerking	Glas
Materiaal	Glas
Type glas	Prestige ceramic
Glazen rand	Rechte rand
Kader	Ja
Kleur kader	Zwart
Frame material	Aluminum
Bediening	Vivo Screen
Kleur LED	Touch display
Positie bediening	Vooraan
Logo	Geëtst
Kleur serigrafie	Grijs
Andere beschikbare kleuren	Inox

Program / Functions

Aantal inductiekookzones	5
Opties tijdprogrammering	Automatische uitschakeling
Aantal kookzones met booster	5
Aantal Multizones	2
Hoofdtoets aan/uit	Ja

Vermogenniveaus	17
Totaal aantal kookzones	5

Opties



Multizone	Ja
Flexible Zone Type	MultiZone
Worktop Cut-Out	490x850 mm
Auto Multizone	Ja
Auto Multizone	Ja
Pasta function	Yes
Steaming function	Yes
Roasting function	Yes
Water koken	Ja
Sudderen	Ja
Warmhoudfunctie	Ja
Smelten/Koken op lage temperatuur	Ja
Automatische uitschakeling	5
Pauze optie	Ja
Timer	1
Geluidssignaal einde kooktijd	Ja
Resttijd indicator	Ja
ECO-Logic optie	Si Advance
Beperkt vermogensverbruik	2400 a 11100 - step 100 W
Showroom demo optie	Ja
Kinderbeveiliging	Ja
Quick start	Ja
Snelle selectie niveaus	Ja

Technische specificaties



Linksvoor - Inductie - Multizone - 2.10 kW - Booster 3.00 kW - Double booster 3.70 kW - 21.0x18.0 cm
Linksachter - Inductie - Multizone - 2.10 kW - Booster 3.00 kW - Double booster 3.70 kW - 21.0x18.0 cm
Middenvoor - Inductie - enkel - 2.60 kW - Booster 4.00 kW - Double booster 5.50 kW - 26.0x18.0 cm
Rechtsachter - Inductie - Multizone - 2.10 kW - Booster 3.00 kW - Double booster 3.70 kW - 21.0x18.0 cm


Rechtsvoor - Inductie - Multizone - 2.10 kW - Booster 3.00 kW - Double booster 3.70 kW - 21.0x18.0 cm
Multizone left - Booster 3.70 kW - 36x21 cm
Multizone right - Booster 3.70 kW - 36x21 cm

Automatische aanpassing panafmeting	Ja
Automatische panherkenning	Ja, min. 9 cm
Permanente automatische pot herkenning met indicatie op de bediening	Ja
Automatisch uitschakelen i.g.v. oververhitting	Ja
Automatisch uitschakelen i.g.v. overkoken	Ja
Restwarmte indicator	Ja
Beveiliging tegen accidentele inschakeling	Ja

Elektrische aansluiting

Nominale aansluitwaarde	11100 W
Stroom	49 A
Type of electric cable supplied	Yes, Single and Double phase
Frequentie	50/60 Hz

Spanning (V)	220-240 V	**Lengte voedingskabel**	120 cm
		Aansluiting	5 polig
Spanning 2 (V)	380-415 V	**Stekker**	Nee
Type stroomkabel	Driefasig		
Type stroomkabel	Eenfasig en tweefasig		

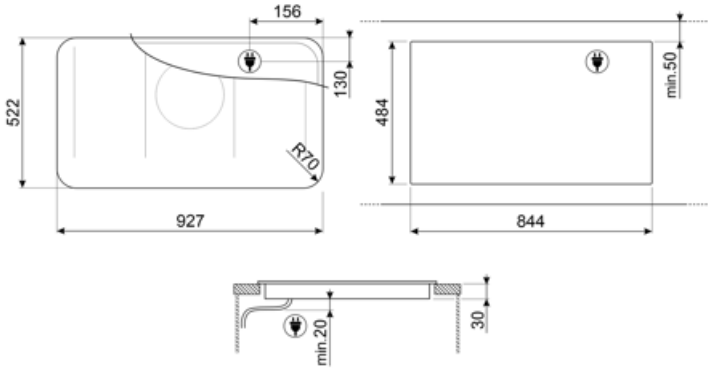

Compatible Accessories



GRILLPLATE

Universal griddle for induction, gas, ceramic and electric hobs. Non-stick surface ideal for cooking meat, cheese and vegetables. Dimensions: 410 x 240 mm.



TPKPLATE

Universal plate for induction, gas, ceramic and electric hobs. Non-stick surface ideal for cooking fish, eggs and vegetables. Dimensions: 410 X 240 mm.



SCRP

Schraper voor inductie- en vitrokeramische kookplaten

Alternative products



SISL7955X

Kleur: Black with stainless steel effect frame

Symbols glossary



Permanent auto pot detection



Power booster: option allows the zone to work at full power when very intense cooking is necessary.



Additional maximum power level for a better energy consumption



This function allows you to keep cooked food warm without burner it



Induction: The work of these hobs is based on the principle of electromagnetic induction. The heat is generated directly in the bottom of the pan during its contact with the hob.



Multizone: maakt het mogelijk meerdere pannen tegelijk te gebruiken, groot of klein, voor meer plaatsingsvrijheid en meer flexibiliteit



All cooking zones can be reduced to the minimum power level, so the hob can be left unattended for a short period without food overcooking or burning. Then just press again this function, the previously set power levels can be reactivated.



Quick Start function: the chosen temperature is reached faster. The heating element works at maximum power until the right temperature is reached.



Simmering function: ideal for long-cooking recipes, preventing food from boiling over or sticking to the pan.



Timer: All ceramic hobs have a timer which automatically ends cooking after a preset time.



Possibility to set the maximum power absorbion of the hob.



Automatic Boiling function: a sensor confirms once the boiling point has been reached and then an acoustic alert signals that the ingredients can be added, saving time and energy.



Sommige modellen zijn voorzien van een functie om het programma/de cyclus te blokkeren zodat het niet per ongeluk kan aangepast worden.



Possibility to freely move the pot everywhere without turn off the initial settings chosen.



Overheat protection: The safety system that automatically turns off the hob in case of overheating of the control unit.



Melting function, suitable for slowly melting delicate foods such as chocolate or butter.



Overfill protection: The special overfill protection shuts down the stove in the presence of overflow of liquids.



Quick selection, with one touch cooking begins at the highest level, then automatically reduces after time. Ideal for dishes that require quick boiling and then continued cooking without constant control (eg beef broth).



Indication of residual heat: After the glass ceramic hob is switched off the residual heat indicator shows which of the heating zones still remains hot. When the temperature drops below 60 ° C, the indicator goes out.



Time elapsed: shows how long the cooking zone has been in use.



Min diameter pot detection of 9 cm.