
SISL7964MB

Familie	Kookplaat
Inbouw	Tussenbouw
Afmeting	90 cm
Voeding	Elektrisch
Type	Inductie
EAN-code	8017709351823

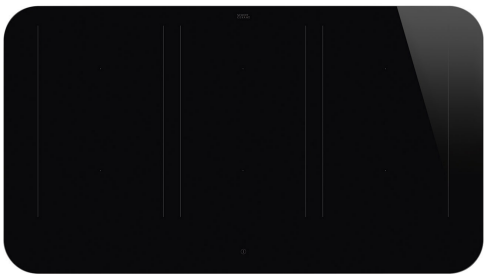

Design

Esthetiek	Isola
Serie	Alta
Kleur	Black with matt black frame
Afwerking	Glas
Materiaal	Glas
Type glas	Ceramic Eclipse
Glazen rand	Rechte rand
Kader	Ja
Kleur kader	Zwart
Frame material	Aluminum
Type bediening	EVO Slider
Slider	Ja
Slider	Wit
Positie bediening	Voor
Logo	Geëtst
Kleur serigrafie	Grijs
Andere beschikbare kleuren	Roestvrij staal

Program / Functions

Aantal inductiekookzones	6
Opties tijdprogrammering	Automatische uitschakeling
Aantal kookzones met booster	6
Aantal Multizones	3

Hoofdtoets aan/uit	Ja
Vermogenniveaus	9
Auto-vent 2.0	Ja
Totaal aantal kookzones	6

Opties



Multizone optie	Ja	**Resttijd indicator**	Ja
Flexible Zone Type	MultiZone	**ECO-Logic optie**	Ja, Advance
Worktop Cut-Out	490x850 mm	**ECO-Logic optie - stappen**	2400 a 11100 - step 100 W
Warmhoudfunctie	Ja	**Showroom demo optie**	Ja
Grill functie	Ja	**Kinderbeveiliging**	Ja
Automatische uitschakeling	6	**TwinZone optie**	Ja
Pauze optie	Ja	**Quick start**	Ja
Timer	1	**Snelle selectie niveaus**	Ja
Akoestisch signaal einde kooktijd	Ja		

Technische specificaties




Linksvoor - Inductie - Multizone - 2.10 kW - Booster 2.50 kW - Double booster 3 kW - 24.0x18.0 cm
Linksachter - Inductie - Multizone - 2.10 kW - Booster 2.50 kW - Double booster 3 kW - 24.0x18.0 cm
Middenvoor - Inductie - Multizone - 2.10 kW - Booster 2.50 kW - Double booster 3 kW - 24.0x18.0 cm
Middenachter - Inductie - Multizone - 2.10 kW - Booster 2.50 kW - Double booster 3 kW - 24.0x18.0 cm
Rechtsvoor - Inductie - Multizone - 2.10 kW - Booster 2.50 kW - Double booster 3 kW - 24.0x18.0 cm
Rechtsachter - Inductie - Multizone - 2.10 kW - Booster 2.50 kW - Double booster 3 kW - 24.0x18.0 cm
Multizone left - Booster 3.7 kW - 38.5x23.0 cm
Multizone center - Booster 3.7 kW - 38.5x23.0 cm
Multizone right - Booster 3.7 kW - 38.5x23.0 cm

Automatische herkenning panafmeting	Ja	**Automatisch uitschakelen i.g.v. overkoken**	Ja
Automatische panherkenning	minimaal 9 cm	**Restwarmte indicator**	Ja
Permanente automatische pandetectie met indicatie van de relatieve controle	Ja	**beveiliging tegen onbedoeld inschakeling**	Ja
Automatische stop bij oververhitting	Ja		

Elektrische aansluiting

Aansluitwaarde	11100 W	**Type of electric cable supplied**	Yes, Single and Double phase
Stroom	49 A	**Frequentie**	50/60 Hz
Spanning (V)	220-240 V	**Lengte voedingskabel**	120 cm

Spanning 2 (V)	380-415 V		
Type stroomkabel	Driefasig	**Connection box**	5 polig
Type stroomkabel	Enkele en dubbele fase	**Stekker**	Nee

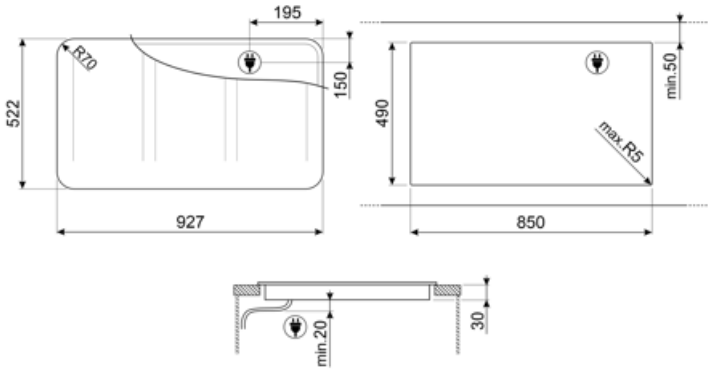

Compatibele Accessoires



GRILLPLATE

Universal griddle for induction, gas, ceramic and electric hobs. Non-stick surface ideal for cooking meat, cheese and vegetables. Dimensions: 410 x 240 mm.



TPKPLATE

Universal plate for induction, gas, ceramic and electric hobs. Non-stick surface ideal for cooking fish, eggs and vegetables. Dimensions: 410 X 240 mm.



SCRP

Inductie- en keramische kookplaten en teppanyaki-schraper

Alternative products



SISL7964X

Kleur: Black with stainless steel effect frame

Symbols glossary



Powerbooster: optie zorgt ervoor dat de zone op vol vermogen werkt wanneer zeer intensief koken nodig is.



The slider control panel allows you to adjust the power simply by passing your finger across the touch device.



Overheat protection: The safety system that automatically turns off the hob in case of overheating of the control unit.



Multizone: allows several pans to be used at once, large or small, offering freedom of placement and greater flexibility



All cooking zones can be reduced to the minimum power level, so the hob can be left unattended for a short period without food overcooking or burning. Then just press again this function, the previously set power levels can be reactivated.



Quick Start function: the chosen temperature is reached faster. The heating element works at maximum power until the right temperature is reached.



Time elapsed: shows how long the cooking zone has been in use.



TWIN_ZONE_72dpi



Connection between hob and hood



Min diameter pot detection of 9 cm.



Darkness becomes light



Kinderslot: sommige modellen zijn voorzien van een apparaat om het programma / de cyclus te vergrendelen zodat het niet kan per ongeluk veranderd



This function allows you to keep cooked food warm without burner it



Induction: The work of these hobs is based on the principle of electromagnetic induction. The heat is generated directly in the bottom of the pan during its contact with the hob.



Overfill protection: The special overfill protection shuts down the stove in the presence of overflow of liquids.



Quick selection, with one touch cooking begins at the highest level, then automatically reduces after time. Ideal for dishes that require quick boiling and then continued cooking without constant control (eg beef broth).



Indication of residual heat: After the glass ceramic hob is switched off the residual heat indicator shows which of the heating zones still remains hot. When the temperature drops below 60 ° C, the indicator goes out.



Timer: All ceramic hobs have a timer which automatically ends cooking after a preset time.



Permanent auto pot detection



Grill function



Possibility to set the maximum power absorbion of the hob.



Evolution Slider totally Back-lighted ghost effect