

# SPD505S

<b>Family</b>	Professional dishwasher
<b>Subfamily</b>	Undercounter
<b>Type</b>	Undercounter dishwashers
<b>Crockery</b>	Crockery; Glasses; Cutlery; GN1/1 trays
<b>Basket dimensions</b>	500x500 mm
<b>Control panel</b>	Electronic
<b>Standard drain pump with partial water renewal in the wash tank</b>	Yes
<b>Rinse pump</b>	HTR system
<b>Boiler type</b>	Atmosferic boiler
<b>Wash pump</b>	Standard
<b>Power connection</b>	400 V 3N~ / 12 A / 7,3 kW / 50 Hz
<b>Product dimensions (WxDxH)</b>	578x600x814 mm



## Target

<b>Industries</b>	Bar / Cafeterias / Bistros / Wine bars / Pubs; Hotels; Restaurants; Bakeries / Pastry shops; Care facilities ; Catering; Commercial food services; Butcher shops / Delicatessens
-------------------	--

## Aesthetics

<b>Series</b>	Ecoline
---------------	---------

## Technical Features

<b>Trays number</b>	7 x GN1/1	<b>Max. inlet temperature</b>	60°C
<b>Trays washing option</b>	Yes	<b>Max water hardness</b>	60°f - 34°dH
<b>Water consumption per cycle</b>	3,2 l	<b>Inlet pressure</b>	100-1000 kPa (min-max)
<b>Wash temperature (min-max)</b>	60 °C	<b>Detergent load</b>	1,5 l/h
<b>Rinse temperature (min-max)</b>	85 °C	<b>Rinse load</b>	0,4 l/h
<b>Min. water connection temperature</b>	5°C	<b>Usable load height</b>	340 mm
<b>Minimum water consumption per cycle</b>	3,2 l	<b>Depth with open door</b>	1000 mm

## Programs

<b>Programs</b>	3 automatic programs; Self-cleaning programs
<b>Program options</b>	Extra rinse; Clean water cycle
<b>Program table</b>	Electronic Ecoline dishwasher 500
<b>Maximum basket/hour</b>	40
<b>Maximum glasses/hour</b>	1440

## Electrical Connection

<b>Tank heating element power</b>	2000 W	<b>Default connection</b>	7300 W
<b>Boiler heating element power</b>	6100 W	<b>Optional electrical connection</b>	230 V 3~ / 19 A / 7,3 kW / 50 Hz; 230 V 3~ / 19 A / 6,8 kW / 50 Hz; 230 V~ / 15 A / 3,4 kW / 50 Hz; 230 V~ / 17 A / 3.9 kW / 50 Hz; 230 V~ / 20 A / 4,5 kW / 50 Hz; 230 V~ / 22 A / 5,0 kW / 50 Hz; 400 V 3N~ / 12 A / 6,8 kW / 50 Hz
<b>Wash pump power</b>	700 W	<b>Plug</b>	Not present

## Interface

<b>On/Off button</b>	Yes	<b>Manual diagnostic</b>	Yes
<b>Salt alert</b>	Yes		

## Construction

<b>Tank Construction</b>	Deep drawn	<b>Rack guides</b>	Embossed
<b>Tank material</b>	Partial double-skin	<b>Filter</b>	4-stage filter system
<b>Back panel</b>	Stainless steel AISI 304	<b>Tank capacity</b>	16 l
<b>Upper wash system</b>	St/steel	<b>Boiler capacity</b>	6 l
<b>Lower wash system</b>	One wash and one split rinse spray arms, stainless steel	<b>Noise</b>	Lpa 54,5 dBA
<b>Tank filter</b>	One wash and one combined rinse spray arms, stainless steel and plastic	<b>Protection class</b>	IPX4
<b>Door gasket</b>	Plastic	<b>Adjustable feet</b>	Yes
	Only up	<b>Drain max. height</b>	1000 mm

## Accessories included


<b>Dish basket</b>	1x PB50D01	<b>Water supply hose</b>	Yes - 1,5 m
<b>Cutlery basket</b>	1x PHOOS04	<b>Drain hose</b>	Yes - 2m
<b>Flat basket</b>	1x PB50G02		

## Equipments


<b>Peristaltic detergent dispenser</b>	Manual	<b>Stand-by system</b>	Yes
<b>Peristaltic rinse-aid dispenser</b>	Manual	<b>Cycle counter</b>	Yes
<b>Default chemicals dosing unit of measure</b>	gr/lt	<b>Break tank</b>	Yes
<b>Automatic built softener</b>	Yes	<b>Water supply pipe diameter</b>	DN15 - ½"
<b>Rinse boiler Thermostop system</b>	Yes - default	<b>Drain supply pipe diameter</b>	DN20-G 3/4"
<b>Wash tank Thermostop system</b>	Yes	<b>Detergent (red) hose length</b>	2,2 m
<b>Wash pump soft start system</b>	Yes	<b>Rinse aid (blue) hose length</b>	2,2 m

## Logistic Information

<b>EAN code</b>	8017709327132	<b>Net weight</b>	61,000 kg
<b>Packed product dimensions (WxDxH)</b>	660x700x990 mm	<b>Gross weight</b>	69,000 kg

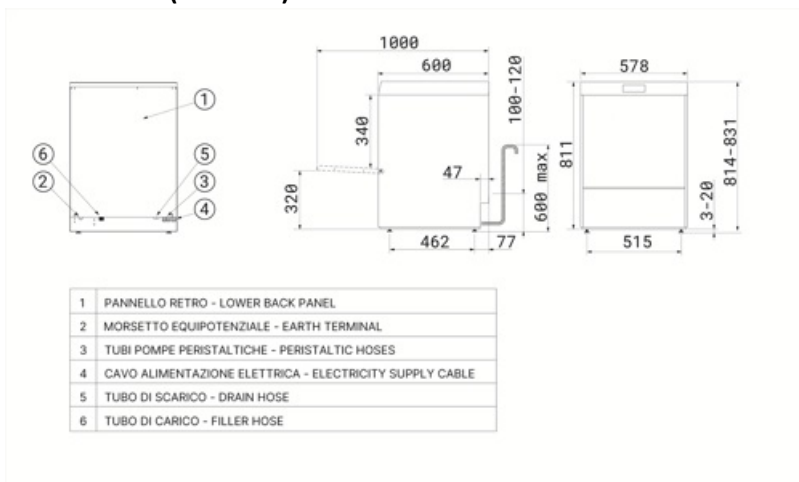

## Compatible Accessories



### PB50D01

Polypropylene basket for 18 plates  
Ø250 mm max, dim. (WxDxH)  
500x500x105 mm



### PHOGR5

Tilted glass insert for basket PB50G02  
500x500 mm, configurable with 4 units  
of 5 glasses each (first line Ø max 110  
mm, lines 2-4 Ø max 95 mm), or 5 units  
of 5 glasses each (first line Ø max 95  
mm, lines 2-5 Ø max 75 mm)



### PHOOS04

4 compartments polypropylene basket  
for cutlery



### WB50G01

Universal wire basket with flat bottom,  
internal height 120 mm, dim. (WxDxH)  
500x500x130 mm



### WB50G03

Wire basket with sloped bottom for  
glasses Ø72 mm max, dim. (WxDxH)  
500x500x235 mm




### WB50PG5

Wire basket with flat bottom for 25  
plastic glasses, max. H 230 mm, min.-  
max. Ø 36-95 mm, dim. (WxDxH)  
500x500x260 mm



### WH00S01

Wire insert for 17 small dishes, width  
100 mm, for flat bottom baskets  
500x500 and 600x500 mm



### PB50G02

Universal flat bottom polypropylene  
basket, internal height 150 mm, dim.  
(WxDxH) 500x500x170 mm



### PHOOS01

Polypropylene single basket for  
cutlery



### WB50D01

Wire basket for 18 dishes Ø250 mm  
max or trays h 370 mm, dim. (WxDxH)  
500x500x92 mm



### WB50G02

Wire basket with sloped bottom for  
25 glasses Ø90 mm max, dim.  
(WxDxH) 500x500x170 mm



### WB50G04

Wire basket with sloped bottom for  
12 glasses Ø110 mm max or 9  
glasses Ø135 mm max, dim. (WxDxH)  
500x500x165 mm



### WB50T02

Wire basket for 7 trays GN1/1 h 20  
mm, dim. (WxD) 500x500 mm



### WS5

Stainless steel underframe for  
undercounter glasswashers and  
dishwashers 500 mm, dim. (WxDxH)  
595x595x490 mm

## Benefit (TT)

---

### 4-stage filtration system

Deep cleaning and spotless washes with the Patented 4-Stages Filtration System

The innovative Smeg filtration system consists of 4 stages to completely eliminate all impurities: the 1st stage captures larger food residues; in the 2nd stages, finer particles are captured at this filtration stage; the 3th stage features a pre-filtration grid to prevent debris from entering the tank and clouding the water. Finally, the last stage is designed to further protect the washing and draining pumps from any debris that may accidentally enter the tank during filter cleaning.

### HTR System

Consistent temperatures and pressures for uniform and effective dishwashing

Thanks to the HTR system (High Temperature Rinse) and the presence of the atmospheric boiler combined with the Thermostop, the cold inlet water does not enter the boiler during rinsing, ensuring a constant rinsing temperature according to the program setting. The HTR system keeps the water hot for deep sanitisation and quick drying, ensuring constant pressure for uniform and effective cleaning.

### Moulded tank

Superior washing performance and enhanced cleaning convenience with molded tub bottoms and basket guides

Smeg dishwashers are designed with moulded tank and basket guides. The absence of sharp edges ensures an optimised wash flow, guaranteeing hygiene and impeccable cleaning performance. Furthermore, this innovative design simplifies machine cleaning, reducing the need for maintenance interventions.

### Integrated softener

Effective water treatment for consistently sparkling glasses

The integrated continuous regeneration water softener ensures effective water treatment, enhancing washing performance and preserving the machine's operational lifespan. The resin regeneration process takes place during the wash cycle without interruptions, providing constant control over water hardness. This system prevents limescale buildup, maximises detergent efficiency, and guarantees spotless results on glassware and dishes.

### Partial double-skin

Optimised thermal and acoustic insulation

The Ecoline undercounter dishwashers are equipped with a partial double-skin structure that optimises energy efficiency by minimising heat loss. Additionally, it provides effective acoustic insulation, helping to reduce noise levels and ensuring a quieter, more comfortable working environment for staff.

### Drain pump

Partial water replacement during the wash cycle for clean and hygienic dishes

The standard drain pump, equipped with a partial water exchange system, ensures that the dirtiest water is automatically removed at every wash cycle. This mechanism allows for continuous renewal of the water used, ensuring that each phase of the washing process is carried out with clean water. The result is optimal dishwashing performance, with outstanding efficiency and an impeccable level of hygiene.

### Soft-start system

Effective management of the washing pump to protect your glassware

The Soft-Start function initiates the wash cycle gently and gradually, progressively increasing the water pressure. This system has been designed to provide optimal protection for the most fragile items, such as crystal glasses, significantly reducing the risk of chipping or damage. At the same time, it ensures excellent cleaning performance, combining efficiency and safety in every wash cycle.