

SPD505S

Família	Máquina de lavar louça profissional
Subfamília	Sob bancada
Tipo	Undercounter dishwashers
Louça	Louça; Copos; Talheres; GN1/1 trays
Dimensões do cesto	500x500 mm
Painel de comandos	Controlo eletrónico da temperatura
Standard drain pump with partial water renewal in the wash tank	Sim
Bomba de enxaguamento	HTR system
Tipo de caldeira	Atmosferic boiler
Bomba de lavagem	Standard
Ligação energética	400 V 3N~ / 12 A / 7,3 kW / 50 Hz
Dimensões do produto (LxPxA)	578x600x814 mm



Mercado

Indústrias	Bares, Cafés e Pubs; Hotelaria; Restaurantes / Catering; Padarias / Pastelarias; Estabelecimentos de Cuidados; Catering; Indústrias Alimentares; Talhos
-------------------	------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

Design

Design	Ecoline
---------------	---------

Especificações técnicas

Trays number	7 x GN1/1	Temperatura máxima de entrada:	60°C
Opção de lavagem dos tabuleiros	Sim	Dureza máxima da água	60°F - 34°dH
Consumo de água por ciclo	3,2 l	Pressão de entrada	100-1000 kPa (min-max)
Temperatura de lavagem (mín.-máx)	60 °C	Carga de detergente	1,5 l/h
Temperatura de enxaguamento (mín.-máx.)	85 °C	Carga de enxaguamento	0,4 l/h
Temperatura de enxaguamento a frio	No	Altura de carga operável	340 mm
		Profundidade com porta aberta	1000 mm

Temperatura pré-definida de ligação da água	5°C
Consumo mínimo de água por ciclo	3,2 l

Programas

Programas	3 programas automáticos; Programas de autolimpeza
Opções do programa	Enxaguamento extra; Ciclo da água limpa
Tabela de programas	Electronic Ecoline dishwasher 500
Numero máximo de cestos/hora	40
Numero máximo de copos/hora	1440

Ligação elétrica

Potência do elemento de aquecimento do tanque	2000 W	Ligação pré-definida	7300 W
Potência do elemento de aquecimento da caldeira	6100 W	Ligação elétrica opcional	230 V 3~ / 19 A / 7,3 kW / 50 Hz; 230 V 3~ / 19 A / 6,8 kW / 50 Hz; 230 V~ / 15 A / 3,4 kW / 50 Hz; 230 V~ / 17 A / 3.9 kW / 50 Hz; 230 V~ / 20 A / 4,5 kW / 50 Hz; 230 V~ / 22 A / 5,0 kW / 50 Hz; 400 V 3N~ / 12 A / 6,8 kW / 50 Hz
Potência da bomba de lavagem	700 W	Ficha elétrica	Não

Interface

Luz indicadora On/Off	Sim	Diagnóstico manual	Sim
Luz indicadora de falta de sal	Sim		

ESPECIFICAÇÕES TÉCNICAS

Cuba	Profundo	Guias dos cestos	Embutidas
Tipologia	Parede dupla parcial	Filtro	Sistema de filtragem em 4 fases
Material da cuba	Aço inox AISI 304	Capacidade da cuba	16 l
Painel traseiro	St/steel	Capacidade da caldeira	6 l
Sistema de lavagem superior	Um braço de lavagem e um braço de enxaguamento dividido, em aço inoxidável.	Ruído	Lpa 54,5 dBA
Sistema de lavagem inferior	Um braço de lavagem e um braço de enxaguamento combinado, em aço inoxidável e plástico.	Classe de Proteção	IPX4
Filtro da cuba	Plástico	Pés ajustáveis	Sim
Junta da porta	Apenas para cima	Altura max. de drenagem	1000 mm

Acessórios incluídos


Cesto para pratos	1x PB50D01	Mangueira de abastecimento de água	Sim - 1,5m
Cesto para talheres	1x PHOOS04	Mangueira de drenagem	Sim - 2m
Cesto de fundo plano	1x PB50G02		

Equipamentos


Dispensador peristáltico de detergente	Manual	Sistema Stand-by	Sim
Dispensador peristáltico de brilhantador	Manual	Contador de ciclos	Sim
Unidade de medida da dosagem de produtos químicos	gr/lt	Tanque de Ruptura	Sim
Amaciador automático incorporado	Sim	Diâmetro do tudo de abastecimento de água	DN15 - ½"
Sistema Thermostop para caldeira de enxaguamento	Yes - default	Ø do tubo de drenagem	DN20-G 3/4"
Sistema Thermostop no tanque de lavagem	Sim	Comprimento da mangueira de detergente (vermelha)	2,2 m
Sistema de arranque suave da bomba de lavagem	Sim	Comprimento da mangueira de enxaguamento (azul)	2,2 m

Dados de logística

Código EAN	8017709327132	Peso líquido (kg)	61,000 kg
Dimensões do produto embalado (LxPxA)	660x700x990 mm	Peso bruto (kg)	69,000 kg

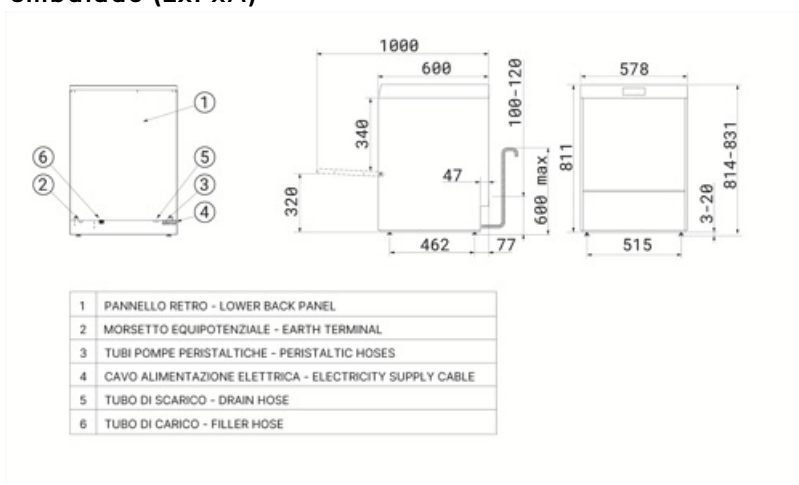


Acessórios Compatíveis



PB50D01

Polypropylene basket for 18 plates
Ø250 mm max, dim. (WxDxH)
500x500x105 mm



PB50G02

Universal flat bottom polypropylene
basket, internal height 150 mm, dim.
(WxDxH) 500x500x170 mm



PHOGR5

Tilted glass insert for basket PB50G02
500x500 mm, configurable with 4 units
of 5 glasses each (first line Ø max 110
mm, lines 2-4 Ø max 95 mm), or 5 units
of 5 glasses each (first line Ø max 95
mm, lines 2-5 Ø max 75 mm)



PHOOS01

Polypropylene single basket for
cutlery



PHOOS04

4 compartments polypropylene basket
for cutlery



WB50D01

Wire basket for 18 dishes Ø250 mm
max or trays h 370 mm, dim. (WxDxH)
500x500x92 mm



WB50G01

Universal wire basket with flat bottom,
internal height 120 mm, dim. (WxDxH)
500x500x130 mm



WB50G02

Wire basket with sloped bottom for
25 glasses Ø90 mm max, dim.
(WxDxH) 500x500x170 mm



WB50G03

Wire basket with sloped bottom for
glasses Ø72 mm max, dim. (WxDxH)
500x500x235 mm



WB50G04

Wire basket with sloped bottom for
12 glasses Ø110 mm max or 9
glasses Ø135 mm max, dim. (WxDxH)
500x500x165 mm



WB50PG5

Wire basket with flat bottom for 25
plastic glasses, max. H 230 mm, min.-
max. Ø 36-95 mm, dim. (WxDxH)
500x500x260 mm



WB50T02

Wire basket for 7 trays GN1/1 h 20
mm, dim. (WxD) 500x500 mm



WH00S01

Wire insert for 17 small dishes, width
100 mm, for flat bottom baskets
500x500 and 600x500 mm



WS5

Estrutura inferior para máquina de
lavar copos e máquina de lavar louça
500

Benefit (TT)

4-stage filtration system

Deep cleaning and spotless washes with the Patented 4-Stages Filtration System

The innovative Smeg filtration system consists of 4 stages to completely eliminate all impurities: the 1st stage captures larger food residues; in the 2nd stages, finer particles are captured at this filtration stage; the 3th stage features a pre-filtration grid to prevent debris from entering the tank and clouding the water. Finally, the last stage is designed to further protect the washing and draining pumps from any debris that may accidentally enter the tank during filter cleaning.

HTR System

Consistent temperatures and pressures for uniform and effective dishwashing

Thanks to the HTR system (High Temperature Rinse) and the presence of the atmospheric boiler combined with the Thermostop, the cold inlet water does not enter the boiler during rinsing, ensuring a constant rinsing temperature according to the program setting. The HTR system keeps the water hot for deep sanitisation and quick drying, ensuring constant pressure for uniform and effective cleaning.

Moulded tank

Superior washing performance and enhanced cleaning convenience with molded tub bottoms and basket guides

Smeg dishwashers are designed with moulded tank and basket guides. The absence of sharp edges ensures an optimised wash flow, guaranteeing hygiene and impeccable cleaning performance. Furthermore, this innovative design simplifies machine cleaning, reducing the need for maintenance interventions.

Integrated softener

Effective water treatment for consistently sparkling glasses

The integrated continuous regeneration water softener ensures effective water treatment, enhancing washing performance and preserving the machine's operational lifespan. The resin regeneration process takes place during the wash cycle without interruptions, providing constant control over water hardness. This system prevents limescale buildup, maximises detergent efficiency, and guarantees spotless results on glassware and dishes.

Partial double-skin

Optimised thermal and acoustic insulation

The Ecoline undercounter dishwashers are equipped with a partial double-skin structure that optimises energy efficiency by minimising heat loss. Additionally, it provides effective acoustic insulation, helping to reduce noise levels and ensuring a quieter, more comfortable working environment for staff.

Drain pump

Partial water replacement during the wash cycle for clean and hygienic dishes

The standard drain pump, equipped with a partial water exchange system, ensures that the dirtiest water is automatically removed at every wash cycle. This mechanism allows for continuous renewal of the water used, ensuring that each phase of the washing process is carried out with clean water. The result is optimal dishwashing performance, with outstanding efficiency and an impeccable level of hygiene.

Soft-start system

Effective management of the washing pump to protect your glassware

The Soft-Start function initiates the wash cycle gently and gradually, progressively increasing the water pressure. This system has been designed to provide optimal protection for the most fragile items, such as crystal glasses, significantly reducing the risk of chipping or damage. At the same time, it ensures excellent cleaning performance, combining efficiency and safety in every wash cycle.