

SPD513S

Família	Máquina de lavar louça profissional
Subfamília	Sob bancada
Tipo	Undercounter dishwashers
Louça	Louça; Copos; Talheres; GN1/1 trays
Dimensões do cesto	500x500 mm
Painel de comandos	Controlo eletrónico da temperatura
Standard drain pump with partial water renewal in the wash tank	Sim
Tipo de caldeira	Caldeira de pressão
Bomba de lavagem	Standard
Ligação energética	400 V 3N~ / 12 A / 7,3 kW / 50 Hz
Dimensões do produto (LxPxA)	600x600x822 mm



Mercado

Indústrias	Bares, Cafés e Pubs; Hotelaria; Restaurantes / Catering; Padarias / Pastelarias; Estabelecimentos de Cuidados; Supermercados / Comércio de alimentos; Catering; Indústrias Alimentares; Talhos
-------------------	--

Design

Cor dos LEDs	Verde	Design	Easyline
---------------------	-------	---------------	----------

Especificações técnicas

Trays number	7 x GN1/1	Temperatura máxima de entrada:	60°C
Opção de lavagem dos tabuleiros	Sim	Dureza máxima da água	54°f - 30°dH
Consumo de água por ciclo	3,2 l	Pressão de entrada	250-1000 kPa (min-max)
Temperatura de lavagem (mín.-máx)	60 °C	Carga de detergente	1,5 l/h
Temperatura de enxaguamento (mín.-máx.)	71 °C - 85 °C	Carga de enxaguamento	0,4 l/h
Temperatura de enxaguamento a frio	No	Altura de carga operável	400 mm
		Profundidade com porta aberta	1020 mm

Temperatura pré-definida de ligação da água	5°C
Consumo mínimo de água por ciclo	3,2 l

Programas

Programas	6 programas automáticos; 1 fully customizable program; Programas de autolimpeza
Opções do programa	Enxaguamento extra; Ciclo da água limpa
Tabela de programas	Easyline dishwasher and traywasher 500
Numero máximo de cestos/hora	60
Numero máximo de pratos/hora	1080
Numero máximo de copos/hora	2160

Ligação eléctrica

Potência do elemento de aquecimento do tanque	2000 W	Ligação pré-definida	7300 W
Potência do elemento de aquecimento da caldeira	6100 W	Ligação eléctrica opcional	230 V 3~ / 19 A / 7,3 kW / 50 Hz; 230 V 3~ / 19 A / 6,8 kW / 50 Hz; 230 V~ / 15 A / 3,4 kW / 50 Hz; 230 V~ / 17 A / 3.9 kW / 50 Hz; 230 V~ / 20 A / 4,5 kW / 50 Hz; 230 V~ / 22 A / 5,0 kW / 50 Hz; 400 V 3N~ / 12 A / 6,8 kW / 50 Hz
Potência da bomba de lavagem	700 W	Ficha eléctrica	Não

Interface

Display	8 dígitos	Alerta de falta de detergente	Sim
Numero de botões	5	Indicador da fase do programa	Sim
Luz indicadora On/Off	Sim	Indicador de fim do programa	Sim
Luz indicadora de falta de sal	Sim	Diagnóstico manual	Sim
Alerta de falta de abrillantador	Sim		

ESPECIFICAÇÕES TÉCNICAS

Cuba	Profundo	Guias dos cestos	Embutidas
Tipologia	Parede dupla	Filtro	Sistema de filtragem de 5 estágios
Material da cuba	Aço inox AISI 304	Capacidade da cuba	11 l
Painel traseiro	Porta galvanizada	Capacidade da caldeira	6 l
Porta equilibrada	Sim	Ruído	Lpa 54,5 dBA
Sistema de lavagem superior	Um braço de lavagem e um braço de enxaguamento dividido, em aço inoxidável.	Classe de Proteção	IPX4
		Pés ajustáveis	Sim

Sistema de lavagem inferior	One wash and one split rinse spray arms, stainless steel	Altura max. de drenagem	600 mm
Filtro da cuba	Aço inox		
Junta da porta	Em 3 lados		

Acessórios incluídos


Cesto para pratos	1x PB50D01	Mangueira de abastecimento de água	Sim - 2m
Cesto para talheres	1x PHOOS02	Mangueira de drenagem	Sim - 2m
Cesto de fundo plano	1x PB50G02		

Equipamentos

Dispensador peristáltico de detergente	Controlo eletrónico	Sistema Stand-by	Sim
Dispensador peristáltico de abrilhantador	Controlo eletrónico	Opção para ativação automática diária	Sim, desligado por definição
Sonda de nível químico	Sim, opcional KITSONLIV	Contador de ciclos	Sim
Unidade de medida da dosagem de produtos químicos	gr/lt	Diâmetro do tudo de abastecimento de água	DN15 - ½"
Amaciador automático incorporado	Sim	Ø do tubo de drenagem	DN20-G 3/4"
Sistema Thermostop para caldeira de enxaguamento	Yes - default	Comprimento da mangueira de detergente (vermelha)	2,2 m
Sistema Thermostop no tanque de lavagem	Sim	Comprimento da mangueira de enxaguamento (azul)	2,2 m
Sistema de arranque suave da bomba de lavagem	Sim		

Dados de logística

Código EAN	8017709343422	Peso líquido (kg)	61,000 kg
Dimensões do produto embalado (LxPxX)	990x660x700 mm	Peso bruto (kg)	69,000 kg

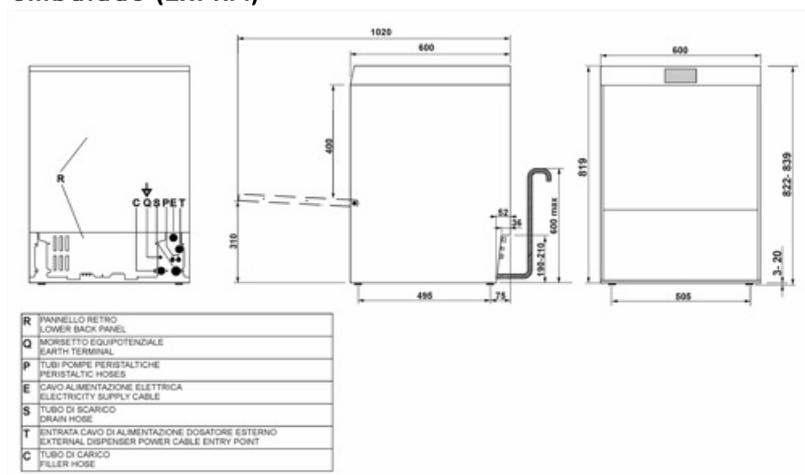

Acessórios Compatíveis




KITDETKCC500

Kit for detergent (1l) and rinse aid (1l) storage for undercounter 500 double wall models




KITSONLIV

Probe level kit



PB50D01

Polypropylene basket for 18 plates
Ø250 mm max, dim.(WxDxH)
500x500x105 mm



PB50G02

Universal flat bottom polypropylene basket, internal height 150 mm, dim. (WxDxH) 500x500x170 mm



PB50T01

Polypropylene basket for 8 trays GN 1/1 h 40 mm for traywasher and hood-type models. Vertical row spacing 68 mm and horizontal row spacing 54 mm, dim. (WxDxH) 500x500x105 mm



PHOGR5

Tilted glass insert for basket PB50G02 500x500 mm, configurable with 4 units of 5 glasses each (first line Ø max 110 mm, lines 2-4 Ø max 95 mm), or 5 units of 5 glasses each (first line Ø max 95 mm, lines 2-5 Ø max 75 mm)



PHOOS01

Polypropylene single basket for cutlery



PHOOS02

6 compartment polypropylene basket for cutlery



WB50G01

Universal wire basket with flat bottom, internal height 120 mm, dim. (WxDxH) 500x500x130 mm



WB50G02

Wire basket with sloped bottom for 25 glasses Ø90 mm max, dim. (WxDxH) 500x500x170 mm



WB50G03

Wire basket with sloped bottom for glasses Ø72 mm max, dim. (WxDxH) 500x500x235 mm



WB50G04

Wire basket with sloped bottom for 12 glasses Ø110 mm max or 9 glasses Ø135 mm max, dim. (WxDxH) 500x500x165 mm



WB50PG5

Wire basket with flat bottom for 25 plastic glasses, max. H 230 mm, min.-max. Ø 36-95 mm, dim. (WxDxH) 500x500x260 mm



WB50T02

Wire basket for 7 trays GN1/1 h 20 mm, dim. (WxD) 500x500 mm



WH00S01

Wire insert for 17 small dishes, width 100 mm, for flat bottom baskets 500x500 and 600x500 mm



WS5

Estrutura inferior para máquina de lavar copos e máquina de lavar louça 500

Benefit (TT)

Balanced door

Effortless opening and closing

The counterbalanced door is designed to ensure smooth and effortless opening and closing, providing high user convenience. Additionally, it can be locked in a halfway position, a particularly useful feature for promoting natural drying at the end of the workday, enhancing overall hygiene and preventing the buildup of residual moisture.

5-stage system

Deep cleaning and spotless washes with the patented filtration system

The innovative Smeg filtration system consists of 5 stages to completely eliminate all impurities: the 1st stage captures larger food residues; in the 2nd and 3rd stages, finer particles are captured at this filtration stage; the 4th stage features a pre-filtration grid to prevent debris from entering the tank and clouding the water. Finally, the last stage is designed to further protect the washing and draining pumps from any debris that may accidentally enter the tank during filter cleaning.

Moulded tank

Superior washing performance and enhanced cleaning convenience with molded tub bottoms and basket guides

Smeg dishwashers are designed with moulded tank and basket guides. The absence of sharp edges ensures an optimised wash flow, guaranteeing hygiene and impeccable cleaning performance. Furthermore, this innovative design simplifies machine cleaning, reducing the need for maintenance interventions.

Integrated softener

Effective water treatment for consistently sparkling glasses

The integrated continuous regeneration water softener ensures effective water treatment, enhancing washing performance and preserving the machine's operational lifespan. The resin regeneration process takes place during the wash cycle without interruptions, providing constant control over water hardness. This system prevents limescale buildup, maximises detergent efficiency, and guarantees spotless results on glassware and dishes.

Integral double-skin

Thermal and acoustic insulation guaranteed

The double-skin design of undercounter dishwashers is engineered to optimise energy efficiency by minimising heat loss and accelerating water heating, resulting in lower energy consumption and faster start-up times. Additionally, it provides effective sound insulation, helping to reduce noise levels and ensuring a quieter, more comfortable working environment for staff.

Drain pump

Partial water replacement during the wash cycle for clean and hygienic dishes

The standard drain pump, equipped with a partial water exchange system, ensures that the dirtiest water is automatically removed at every wash cycle. This mechanism allows for continuous renewal of the water used, ensuring that each phase of the washing process is carried out with clean water. The result is optimal dishwashing performance, with outstanding efficiency and an impeccable level of hygiene.

Soft-start system

Effective management of the washing pump to protect your glassware

The Soft-Start function initiates the wash cycle gently and gradually, progressively increasing the water pressure. This system has been designed to provide optimal protection for the most fragile items, such as crystal glasses, significantly reducing the risk of chipping or damage. At the same time, it ensures excellent cleaning performance, combining efficiency and safety in every wash cycle.