

# SPD515

Family	Professional dishwasher
Subfamily	Undercounter
Type	Undercounter dishwashers
Crockery	Crockery; Glasses; Cutlery; GN1/1 trays
Basket dimensions	500x500 mm
Control panel	Electronic
Standard drain pump with partial water renewal in the wash tank	Yes
Rinse pump	HTR system
Boiler type	Atmosferic boiler
Wash pump	Standard
Power connection	400 V 3N~ / 12 A / 7,3 kW / 50 Hz
Product dimensions (WxDxH)	600x600x822 mm



## Target

Industries	Bar / Cafeterias / Bistros / Wine bars / Pubs; Hotels; Restaurants; Bakeries / Pastry shops; Care facilities ; Grocery shops / Food retail; Catering; Commercial food services; Butcher shops / Delicatessens
------------	---

## Aesthetics

Led color	Green	Series	Easyline
-----------	-------	--------	----------

## Technical Features

Trays number	7 x GN1/1	Max. inlet temperature	60°C
Trays washing option	Yes	Max water hardness	5°f - 3°dH
Water consumption per cycle	3,2 l	Inlet pressure	100-1000 kPa (min-max)
Wash temperature (min-max)	60 °C	Detergent load	1,5 l/h
Rinse temperature (min-max)	71 °C - 85 °C	Usable load height	400 mm
Min. water connection temperature	5°C	Depth with open door	1020 mm
Minimum water consumption per cycle	3,2 l		

## Programs

<b>Programs</b>	6 automatic programs; 1 fully customizable program; Self-cleaning programs
<b>Program options</b>	Extra rinse; Clean water cycle
<b>Program table</b>	Easyline dishwasher and traywasher 500
<b>Maximum basket/hour</b>	60
<b>Maximum dishes/hour</b>	1080
<b>Maximum glasses/hour</b>	2160

## Electrical Connection

<b>Tank heating element power</b>	2000 W	<b>Default connection</b>	7300 W
<b>Boiler heating element power</b>	6100 W	<b>Optional electrical connection</b>	230 V 3~ / 19 A / 7,3 kW / 50 Hz; 230 V 3~ / 19 A / 6,8 kW / 50 Hz; 230 V~ / 15 A / 3,4 kW / 50 Hz; 230 V~ / 17 A / 3.9 kW / 50 Hz; 230 V~ / 20 A / 4,5 kW / 50 Hz; 230 V~ / 22 A / 5,0 kW / 50 Hz; 400 V 3N~ / 12 A / 6,8 kW / 50 Hz
<b>Wash pump power</b>	700 W	<b>Plug</b>	Not present

## Interface

<b>Display</b>	8 digit	<b>Detergent missing alert</b>	Yes
<b>Number of buttons</b>	5	<b>Cycle progress alert</b>	Yes
<b>On/Off button</b>	Yes	<b>End-cycle alert</b>	Yes
<b>Rinse aid missing alert</b>	Yes	<b>Manual diagnostic</b>	Yes

## Construction

<b>Tank Construction</b>	Deep drawn Integral double-skin	<b>Rack guides</b>	Embossed
<b>Tank material</b>	Stainless steel AISI 304	<b>Filter</b>	5-stage filter system
<b>Back panel</b>	St/steel	<b>Tank capacity</b>	11 l
<b>Balanced door</b>	Yes	<b>Boiler capacity</b>	6,5 l
<b>Upper wash system</b>	One wash and one split rinse spray arms, stainless steel	<b>Noise</b>	Lpa 54,5 dBA
<b>Lower wash system</b>	One wash and one split rinse spray arms, stainless steel	<b>Protection class</b>	IPX4
<b>Tank filter</b>	Stainless steel	<b>Adjustable feet</b>	Yes
<b>Door gasket</b>	On 3 sides	<b>Drain max. height</b>	600 mm

## Accessories included


Dish basket	1x PB50D01	Water supply hose	Yes - 2 m
Cutlery basket	1x PHOOS04	Drain hose	Yes - 2m
Flat basket	1x PB50G02		

## Equipments

Peristaltic detergent dispenser	Electronic control	Option for auto daily switch on	Yes, default OFF
Peristaltic rinse-aid dispenser	Electronic control	Cycle counter	Yes
Chemicals level probe	Yes, with optional kit KITSONLIV	Break tank	Yes
Default chemicals dosing unit of measure	gr/lt	Water supply pipe diameter	DN15 - ½"
Rinse boiler Thermostop system	Yes - default	Drain supply pipe diameter	DN20-G 3/4"
Wash tank Thermostop system	Yes	Detergent (red) hose length	2,2 m
Wash pump soft start system	Yes	Rinse aid (blue) hose length	2,2 m
Stand-by system	Yes		

## Logistic Information

EAN code	8017709340889	Net weight	60,000 kg
Packed product dimensions (WxDxH)	660x700x990 mm	Gross weight	68,000 kg

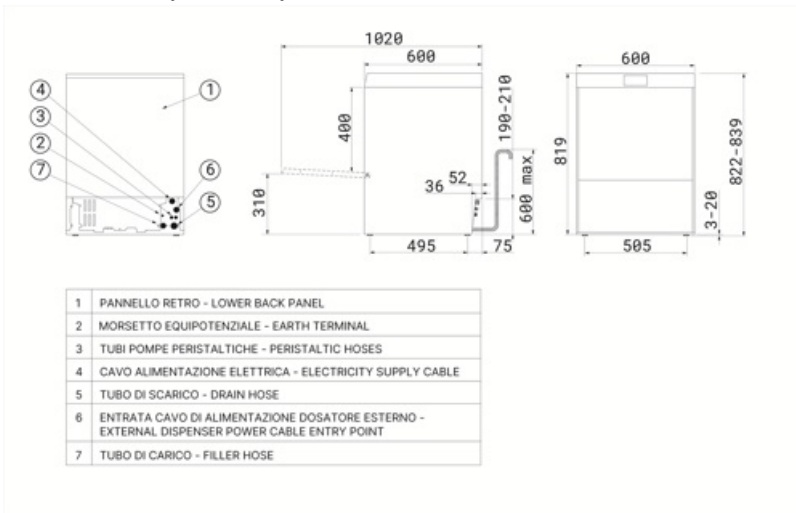


## Compatible Accessories



### KITDETKCC500

Kit for detergent (1l) and rinse aid (1l) storage for undercounter 500 double wall models



### PB50D01

Polypropylene basket for 18 plates  
Ø250 mm max, dim. (WxDxH)  
500x500x105 mm



### PHOGR5

Tilted glass insert for basket PB50G02  
500x500 mm, configurable with 4 units  
of 5 glasses each (first line Ø max 110  
mm, lines 2-4 Ø max 95 mm), or 5 units  
of 5 glasses each (first line Ø max 95  
mm, lines 2-5 Ø max 75 mm)



### PHOOS04

4 compartments polypropylene basket  
for cutlery



### WB50G02

Wire basket with sloped bottom for 25  
glasses Ø90 mm max, dim. (WxDxH)  
500x500x170 mm



### WB50G04

Wire basket with sloped bottom for 12  
glasses Ø110 mm max or 9 glasses  
Ø135 mm max, dim. (WxDxH)  
500x500x165 mm



### WB50T02

Wire basket for 7 trays GN1/1 h 20 mm,  
dim. (WxD) 500x500 mm




### WS5

Stainless steel underframe for  
undercounter glasswashers and  
dishwashers 500 mm, dim. (WxDxH)  
595x595x490 mm



### KITSONLIV

Probe level kit



### PB50G01

Universal flat bottom polypropylene  
basket, internal height 73 mm, dim.  
(WxDxH) 500x500x100 mm




### PHOOS01

Polypropylene single basket for  
cutlery



### WB50G01

Universal wire basket with flat  
bottom, internal height 120 mm, dim.  
(WxDxH) 500x500x130 mm




### WB50G03

Wire basket with sloped bottom for  
glasses Ø72 mm max, dim. (WxDxH)  
500x500x235 mm



### WB50PG5

Wire basket with flat bottom for 25  
plastic glasses, max. H 230 mm, min.-  
max. Ø 36-95 mm, dim. (WxDxH)  
500x500x260 mm



### WH00S01

Wire insert for 17 small dishes, width  
100 mm, for flat bottom baskets  
500x500 and 600x500 mm

## Benefit (TT)

---

### Balanced door

Effortless opening and closing

The counterbalanced door is designed to ensure smooth and effortless opening and closing, providing high user convenience. Additionally, it can be locked in a halfway position, a particularly useful feature for promoting natural drying at the end of the workday, enhancing overall hygiene and preventing the buildup of residual moisture.

### 5-stage system

Deep cleaning and spotless washes with the patented filtration system

The innovative Smeg filtration system consists of 5 stages to completely eliminate all impurities: the 1st stage captures larger food residues; in the 2nd and 3rd stages, finer particles are captured at this filtration stage; the 4th stage features a pre-filtration grid to prevent debris from entering the tank and clouding the water. Finally, the last stage is designed to further protect the washing and draining pumps from any debris that may accidentally enter the tank during filter cleaning.

### HTR System

Consistent temperatures and pressures for uniform and effective dishwashing

Thanks to the HTR system (High Temperature Rinse) and the presence of the atmospheric boiler combined with the Thermostop, the cold inlet water does not enter the boiler during rinsing, ensuring a constant rinsing temperature according to the program setting. The HTR system keeps the water hot for deep sanitisation and quick drying, ensuring constant pressure for uniform and effective cleaning.

### Moulded tank

Superior washing performance and enhanced cleaning convenience with molded tub bottoms and basket guides

Smeg dishwashers are designed with moulded tank and basket guides. The absence of sharp edges ensures an optimised wash flow, guaranteeing hygiene and impeccable cleaning performance. Furthermore, this innovative design simplifies machine cleaning, reducing the need for maintenance interventions.

### Integral double-skin

Thermal and acoustic insulation guaranteed

The double-skin design of undercounter dishwashers is engineered to optimise energy efficiency by minimising heat loss and accelerating water heating, resulting in lower energy consumption and faster start-up times. Additionally, it provides effective sound insulation, helping to reduce noise levels and ensuring a quieter, more comfortable working environment for staff.

### Drain pump

Partial water replacement during the wash cycle for clean and hygienic dishes

The standard drain pump, equipped with a partial water exchange system, ensures that the dirtiest water is automatically removed at every wash cycle. This mechanism allows for continuous renewal of the water used, ensuring that each phase of the washing process is carried out with clean water. The result is optimal dishwashing performance, with outstanding efficiency and an impeccable level of hygiene.

### **Soft-start system**

Effective management of the washing pump to protect your glassware

The Soft-Start function initiates the wash cycle gently and gradually, progressively increasing the water pressure. This system has been designed to provide optimal protection for the most fragile items, such as crystal glasses, significantly reducing the risk of chipping or damage. At the same time, it ensures excellent cleaning performance, combining efficiency and safety in every wash cycle.