

# SPD515S

Family	Professional dishwasher
Subfamily	Undercounter dishwashers
Basket dimensions	500x500 mm
Rinse pump	HTR system
Wash pump	Standard
Power connection	400 V 3N~ / 12 A / 7,3 kW / 50 Hz



## Target

Solutions	Coffee shops/Wine bars; Hotels; Offices; QSR
-----------	---

## Aesthetics

Series	Easyline	Led color	Green
--------	----------	-----------	-------

## Technical Features

Trays washing option	Yes	Max. inlet temperature	60°C
Trays number	7 x GN 1/1 (530 x 325 mm)	Max water hardness	54°f - 30°dH
Water consumption per cycle	3,2 l	Inlet pressure	100-1000 kPa (min-max)
Wash temperature (min-max)	60 °C	Detergent load	1,5 l/h
Rinse temperature (min-max)	71 °C - 85 °C	Usable load height	400 mm
Minimum water consumption per cycle	3,2 l	Depth with open door	1020 mm
Min. water connection temperature	5°C	Product dimensions WxDxH	600x600x822 mm

## Programs

Programs	6 automatic programs; 1 fully customizable program; Self-cleaning programs
----------	--

<b>Program options</b>	Extra rinse; Clean water cycle
<b>Program table</b>	Easyline dishwasher and traywasher 500
<b>Maximum basket/hour</b>	60
<b>Maximum dishes/hour</b>	1080
<b>Maximum glasses/hour</b>	2160

## Electrical Connection

<b>Plug</b>	Not present	<b>Wash pump power</b>	700 W
<b>Tank heating element power</b>	2000 W	<b>Default connection</b>	7300 W
<b>Boiler heating element power</b>	6100 W	<b>Optional electrical connection</b>	230 V 3~ / 19 A / 7,3 kW / 50 Hz; 230 V 3~ / 19 A / 6,8 kW / 50 Hz ; 230 V~ / 15 A / 3,4 kW / 50 Hz; 230 V~ / 17 A / 3.9 kW / 50 Hz; 230 V~ / 20 A / 4,5 kW / 50 Hz ; 230 V~ / 22 A / 5,0 kW / 50 Hz; 400 V 3N~ / 12 A / 6,8 kW / 50 Hz

## Interface

<b>Display</b>	8 digit	<b>Detergent missing alert</b>	Yes
<b>Number of buttons</b>	5	<b>Cycle progress alert</b>	Yes
<b>On/Off button</b>	Yes	<b>End-cycle alert</b>	Yes
<b>Salt alert</b>	Yes	<b>Manual diagnostic</b>	Yes
<b>Rinse aid missing alert</b>	Yes		

## Construction

<b>Tank Construction</b>	Deep drawn Integral double-skin	<b>Rack guides</b>	Embossed
<b>Tank material</b>	Stainless steel AISI 304	<b>Filter</b>	5-stage filter system
<b>Back panel</b>	Galvanized	<b>Tank capacity</b>	11 l
<b>Balanced door</b>	Yes	<b>Boiler capacity</b>	6,5 l
<b>Upper wash system</b>	One wash and one split rinse spray arms, stainless steel	<b>Noise</b>	Lpa 54,5 dBA
<b>Lower wash system</b>	One wash and one split rinse spray arms, stainless steel	<b>Protection class</b>	IPX4
<b>Tank filter</b>	Stainless steel	<b>Adjustable feet</b>	Yes
<b>Door gasket</b>	On 3 sides	<b>Drain max. height</b>	600 mm

## Accessories included


<b>Dish basket</b>	1x PB50D01	<b>Water supply hose</b>	Yes - 2m
<b>Cutlery basket</b>	1x PHOOS02	<b>Drain hose</b>	Yes - 2m
<b>Flat basket</b>	1x PB50G02		

## Equipments

Drain pump	Yes	Stand-by system	Yes
Peristaltic detergent dispenser	Electronic control	Option for auto daily switch on	Yes, default OFF
Peristaltic rinse-aid dispenser	Electronic control	Cycle counter	Yes
Chemicals level probe	Yes, with optional kit KITSONLIV	Break tank	Yes
Default chemicals dosing unit of measure	gr/lt	Partial renewal of water in the tank and built-in drain pump	Yes
Automatic built softener	Yes	Water supply pipe diameter	DN15 - ½"
Rinse boiler Thermostop system	Yes - default	Drain supply pipe diameter	DN20-G 3/4"
Wash tank Thermostop system	Yes	Detergent (red) hose lenght	2,2m
Wash pump soft start system	Yes	Rinse aid (blue) hose lenght	2,2m

## Logistic Information

Width packed product	660 mm	Packed product dimensions	990X660X700
Depth packed product	700 mm	Net weight	62,000 kg
Height packed product	990 mm	Gross weight (kg)	70,000

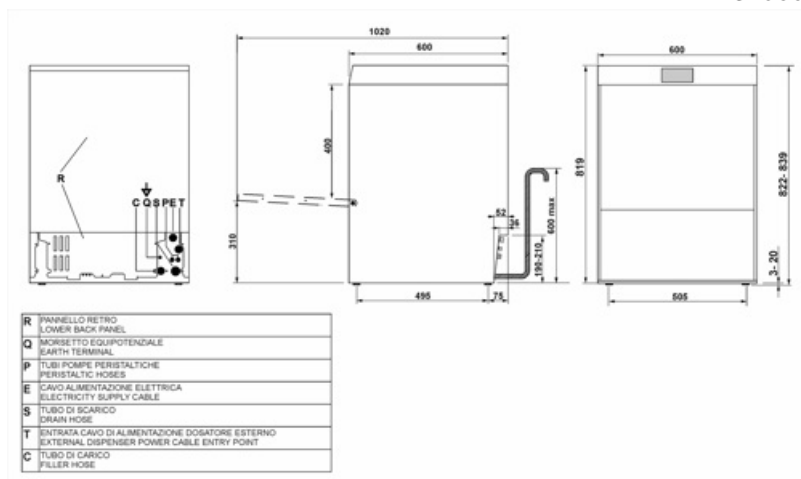

## Compatible Accessories




### KITDETKCC500

Kit for detergent (1l) and rinse aid (1l) storage for double wall models



### KITSONLIV

Probe level kit



### PB50D01

Polypropylene basket for 18 plates  
Ø250 mm, dim. (WxDxH) 500x500x105 mm



### PB50G01

Universal flat bottom polypropylene basket, dim. (WxDxH) 500x500x100 mm



### PB50T01

Polypropylene basket for 8 trays GN 1/1  
h 40 mm



### PHOGR5

Glass insert for 500x500 mm basket




### PHOOS01

Polypropylene single basket for cutlery



### PHOOS02

6 compartment polypropylene basket for cutlery



### WB50G01

Universal wire basket with flat bottom, dim. (WxDxH) 500x500x123 mm



### WB50G02

Wire basket with sloped bottom for glasses Ø90 mm max, dim. (WxDxH) 500x500x170 mm



### WB50G03

Wire basket with sloped bottom for glasses Ø72 mm max, dim. (WxDxH) 500x500x235 mm



### WB50G04

Wire basket with sloped bottom for glasses Ø135 mm max, dim. (WxDxH) 500x500x165 mm



### WB50PG5

Wire basket with flat bottom for 25 plastic glasses, dim. (WxDxH) 500x500x260 mm



### WB50T02

Wire basket for 7 trays GN1/1 h 20 mm



### WH00S01

Wire insert for 12 small dishes



### WS5

Stainless steel underframe for glasswashers and dishwashers, dim. (WxDxH) 595x595x490 mm

## Symbols glossary

---



SUITABLE FOR GASTRONORM TRAY



HTR RINSING SYSTEM



MAX. USABLE HEIGHT 400mm



5 STAGE FILTER

---

## Benefit (TT)

---

### Balanced door

Effortless opening and closing

The counterbalanced door is designed to ensure smooth and effortless opening and closing, providing high user convenience. Additionally, it can be locked in a halfway position, a particularly useful feature for promoting natural drying at the end of the workday, enhancing overall hygiene and preventing the buildup of residual moisture.

### 5-stage system

Deep cleaning and spotless washes with the patented filtration system

The innovative Smeg filtration system consists of 5 stages to completely eliminate all impurities: the 1st stage captures larger food residues; in the 2nd and 3rd stages, finer particles are captured at this filtration stage; the 4th stage features a pre-filtration grid to prevent debris from entering the tank and clouding the water. Finally, the last stage is designed to further protect the washing and draining pumps from any debris that may accidentally enter the tank during filter cleaning.

The presence sensor filter alerts if the filtration system is out of position, ensuring safe washes every time.

### HTR System

Consistent temperatures and pressures for uniform and effective dishwashing

Thanks to the HTR system (High Temperature Rinse) and the presence of the atmospheric boiler combined with the Thermostop, the cold inlet water does not enter the boiler during rinsing, ensuring a constant temperature of 85°C. The HTR system keeps the water hot for deep sanitisation and quick drying, ensuring constant pressure for uniform and effective cleaning.

### Moulded tank

Superior washing performance and enhanced cleaning convenience with molded tub bottoms and basket guides

Smeg dishwashers are designed with moulded tank and basket guides. The absence of sharp edges ensures an optimised wash flow, guaranteeing hygiene and impeccable cleaning performance. Furthermore, this innovative design simplifies machine cleaning, reducing the need for maintenance interventions.

### Integrated softener

Effective water treatment for consistently sparkling glasses

The integrated continuous regeneration water softener ensures effective water treatment, enhancing washing performance and preserving the machine's operational lifespan. The resin regeneration process takes place during the wash cycle without interruptions, providing constant control over water hardness. This system prevents limescale buildup, maximises detergent efficiency, and guarantees spotless results on glassware and dishes.

### Integral double-skin

Thermal and acoustic insulation guaranteed

The double-skin design of undercounter dishwashers is engineered to optimise energy efficiency by minimising heat loss and accelerating water heating, resulting in lower energy consumption and faster start-up times. Additionally, it provides effective sound insulation, helping to reduce noise levels and ensuring a quieter, more comfortable working environment for staff.

### **Drain pump**

Partial water replacement during the wash cycle for clean and hygienic dishes

The standard drain pump, equipped with a partial water exchange system, ensures that the dirtiest water is automatically removed at every wash cycle. This mechanism allows for continuous renewal of the water used, ensuring that each phase of the washing process is carried out with clean water. The result is optimal dishwashing performance, with outstanding efficiency and an impeccable level of hygiene.

### **Soft-start system**

Effective management of the washing pump to protect your glassware

The Soft-Start function initiates the wash cycle gently and gradually, progressively increasing the water pressure. This system has been designed to provide optimal protection for the most fragile items, such as crystal glasses, significantly reducing the risk of chipping or damage. At the same time, it ensures excellent cleaning performance, combining efficiency and safety in every wash cycle.