

SPD515UK

Product Family	Dishwasher
Subfamily	Undercounter dishwashers
Line	Easyline
Basket dimensions	500x500 mm
Rinse pump	HTR system
Wash pump	Standard



Accessories Included

Plate basket	PB50D01	Water supply pipe	Yes - 2m
Cutlery basket	PHOOS02	Drain pipe	Yes - 2m
Flat basket	PB50G01		

Target

Potential users	Bars/Cafes; Hotels; Offices; QSR
-----------------	-------------------------------------

Programmes

Programs	6 automatic programs; 1 fully programmable program; Self-cleaning programs
Program options	Extra rinse; Clean water cycle
Program table	Easyline dishwasher and traywasher 500
Program specifications	Boiler 71°C/Tank 60°C-60"; Boiler 71°C/Tank 60°C-1'20"; Boiler 85°C/Tank 60°C-60"; Boiler 85°C/Tank 60°C-1'10"; Boiler 85°C/Tank 60°C-2'30"; Boiler 85°C/Tank 60°C- 4'10"; Boiler 85°C/Tank 60°C-1'30"
Maximum baskets/hour	60
Maximum plates/hour	1080
Maximum glasses/hour	2160

Interface

Display	8 digit	Low detergent alert	Yes
---------	---------	---------------------	-----

Number of buttons	5	Cycle progress indicator	Yes
On/off indicator	Yes	End of cycle indicator	Yes
Salt light indicator	Yes	Manual diagnostics	Yes
Low rinse aid alert	Yes		

Construction

Tank	Deep drawn	Rack guides	Embossed
Construction	Double wall	Filter	5-stages filter system
Tank material	Stainless steel AISI 304	Wash tank capacity	11 l
Back panel	Galvanized	Boiler capacity	6,5 l
Counter balanced door	Yes	Noise level	Lpa 56,5 dBA
Upper washing system	One washing and one split rinse spray arms, stainless steel	Protection class	IPX4
Lower washing system	One washing and one split rinse spray arms, stainless steel	Adjustable feet	Yes
Tank filter	Stainless steel	Drain max. height	600 mm
Door gasket	On 3 sides		

Technical Features

Trays washing option	Yes	Warm water connection	8°C
Trays number	7 x GN 1/1 (530 x 325 mm)	Max. inlet temperature	60°C
Tank heating element power	2000 W	Max water hardness	12°F - 7°dH
Boiler heating element power	6100 W	Water inlet pressure	1-6 bar / 100-600 kPa
Wash pump power	700 W	Detergent flow rate	1.5 l/h
Default connection	6800 W	Usable load height	400 mm
Water consumption per cycle	3,2 l	Depth with door open	1020 mm
Minimum water consumption per cycle	3,2 l	Dimensions	600x600x822 mm


Electrical Connection

Default power supply	230 V~ / 30 A / 6,8 kW / 50 Hz	Electrical connection options	230 V~ / 12 A / 2,7 kW / 50 Hz; 230 V~ / 15 A / 3,4 kW / 50 Hz; 230 V~ / 20 A / 4,5 kW / 50 Hz; 400 V 3N~ / 12 A / 6,8 kW / 50 Hz
-----------------------------	--------------------------------	--------------------------------------	---

Equipment

Drain pump	Yes	Option for auto daily switch on	Yes
Peristaltic detergent dispenser	Yes, electronic control	Cycle counter	Yes
		Break tank	Yes

Peristaltic rinse-aid dispenser	Yes, electronic control	Partial water exchange in the wash tank via built-in drain pump	Yes
Chemical level probe	Yes, optional KITSONLIV	Water supply pipe diameter	16 mm
Chemical dosing	gr/lt	Drain supply pipe diameter	21.5 mm
Rinse boiler Thermostop system	Yes - default	Detergent (red) hose length	Yes, manual
Wash tank Thermostop system	Yes	Rinse aid (blue) hose length	Yes, manual
Wash pump soft start system	Yes		
Stand-by system	Yes		

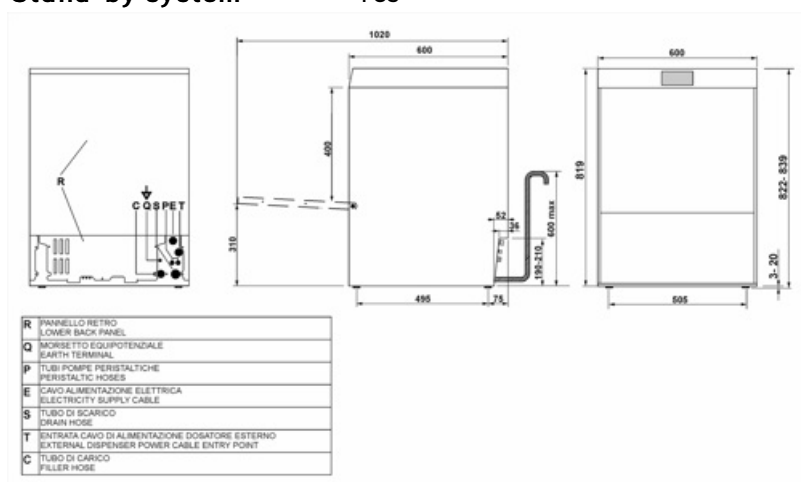

Compatible Accessories



KITDETKCC500

Kit for detergent (1l) and rinse storage (1l) for dishwashers 500x500



KITSONLIV

Probe level kit




PB50D01

Basket made of polypropylene for 18 plates 500x500



PB50G01

Universal basket in polypropylene 500x500



PB50T01

Polypropylene basket for 8 trays GN 1/1 h 40 mm



PHO0GR5

Glass basket for 500x500 mm glasswashers




PHOOS01

Single basket in polypropylene for cutlery



PHOOS02

Basket in polypropylene for cutlery with 6 compartments



WB50G01

Universal wire basket with flat bottom 500x500



WB50G02

Wire basket for glasses with inclined bottom 500x500



WB50G03

Wire basket for glasses with inclined bottom 500x500



WB50G04

Wire basket for glasses with inclined bottom 500x500



WB50T02

Wire basket for 5 trays 600x500



WH00S01

Wire insert for 12 small dishes



WS5

Underframe for glasswashers 500mm

Symbols glossary



Suitable for 1/1GN trays



HTR rinsing system



5 STAGE FILTER



Max usable height 400mm

Benefit

Balanced door

Effortless opening and closing

Effortless opening and closing

The counterbalanced door is designed to ensure smooth and effortless opening and closing, providing high user convenience. Additionally, it can be locked in a halfway position, a particularly useful feature for promoting natural drying at the end of the workday, enhancing overall hygiene and preventing the buildup of residual moisture.

5-stage system

Deep cleaning and spotless washes with the patented filtration system

The innovative Smeg filtration system consists of 5 stages to completely eliminate all impurities: the 1st stage captures larger food residues; in the 2nd and 3rd stages, finer particles are captured at this filtration stage; the 4th stage features a pre-filtration grid to prevent debris from entering the tank and clouding the water. Finally, the last stage is designed to further protect the washing and draining pumps from any debris that may accidentally enter the tank during filter cleaning.

The presence sensor filter alerts if the filtration system is out of position, ensuring safe washes every time.

HTR System

Consistent temperatures and pressures for uniform and effective dishwashing

Thanks to the HTR system (High Temperature Rinse) and the presence of the atmospheric boiler combined with the Thermostop, the cold inlet water does not enter the boiler during rinsing, ensuring a constant temperature of 85°C. The HTR system keeps the water hot for deep sanitisation and quick drying, ensuring constant pressure for uniform and effective cleaning.

Moulded tank

Superior washing performance and enhanced cleaning convenience with molded tub bottoms and basket guides

Smeg dishwashers are designed with moulded tank and basket guides. The absence of sharp edges ensures an optimised wash flow, guaranteeing hygiene and impeccable cleaning performance. Furthermore, this innovative design simplifies machine cleaning, reducing the need for maintenance interventions.

Integral double skin

Thermal and acoustic insulation guaranteed

The double wall is designed to optimise energy efficiency by reducing heat loss and accelerating water heating, resulting in lower energy consumption and faster cycle start-up times. Additionally, it provides effective acoustic insulation, helping to reduce noise and ensuring a quieter, more comfortable working environment for the staff.

Drain pump

Partial water replacement during the wash cycle for clean and hygienic dishes

The standard drain pump, equipped with a partial water exchange system, ensures that the dirtiest water is automatically removed at every wash cycle. This mechanism allows for continuous renewal of the water used, ensuring that each phase of the washing process is carried out with clean water. The result is optimal dishwashing performance, with outstanding efficiency and an impeccable level of hygiene.

Soft-start system

Effective management of the washing pump to protect your glassware

The Soft-Start function initiates the wash cycle gently and gradually, progressively increasing the water pressure. This system has been designed to provide optimal protection for the most fragile items, such as crystal glasses, significantly reducing the risk of chipping or damage. At the same time, it ensures excellent cleaning performance, combining efficiency and safety in every wash cycle.