

SPD526

Family	Professional dishwasher
Subfamily	Undercounter
Type	Undercounter traywasher
Crockery	Crockery; Cutlery; EN 600x400 trays; GN1/1 trays
Basket dimensions	500x500 mm
Control panel	Touch screen
Rinse pump	Self-Adaptive HTR+
Wash pump	Variable speed AdaptWash
Power connection	400 V 3N~ / 15 A / 8,4 kW / 50 Hz
Product dimensions WxDxH	600x690x822 mm



Target

Industries	Hotels; Ristoranti / Catering; Bakeries / Pastry shops; Butcher shops / Delicatessens; Catering; Care facilities ; Commercial food services
------------	---

Aesthetics

Led color	White	Series	Pura
-----------	-------	--------	------

Technical Features

Trays number	7 x GN 1/1 (530 x 325 mm); 6 x EN 1/1 (600 x 400 mm)	Max. inlet temperature	60°C
Trays washing option	Yes	Max water hardness	12°f - 7°dH
Water consumption per cycle	2,5 l	Inlet pressure	100-1000 kPa
Wash temperature (min-max)	60 °C - 70 °C	Detergent load	1,5 l/h
Rinse temperature (min-max)	65 °C - 87 °C	Rinse load	0,4 l/h
Min. water connection temperature	8°C	Usable load height	400 mm
Minimum water consumption per cycle	1,8 l	Depth with open door	1020 mm

Programs

Programs	10 customizable programs; Self-cleaning programs
Program options	Extra rinse; Clean water cycle
Program table	Pura traywasher 500
Program visibility	Yes
Maximum basket/hour	60
Maximum dishes/hour	1080
Maximum glasses/hour	2160

Connectivity



SmegConnect	Yes	PST certificate support period [UK]	24 months
Connectivity	Wi-Fi	UK PSTI support period end date	2028-04-09

Electrical Connection

Tank heating element power	2000 W	Default connection	8400 W
Boiler heating element power	5700 W	Optional electrical connection	230 V 3~ / 24 A / 8,4 kW / 50 Hz; 230 V~ / 14 A / 3,1 kW / 50 Hz; 230 V~ / 31 A / 7,1 kW / 50 Hz
Wash pump power	700 W	Plug	Not present

Interface

Display	TFT	Cycle progress alert	Yes
On/Off button	Yes	End-cycle alert	Yes
Rinse aid missing alert	Yes	Manual diagnostic	Yes
Detergent missing alert	Yes		

Construction

Tank	Deep drawn	Filter	5-stages filter system
Construction	Double wall	Filter presence sensor	Yes
Tank material	Stainless steel AISI 304	Tank capacity	11 l
Back panel	Galvanized	Boiler capacity	6,5 l
Balanced door	Yes	Boiler type	Artmosferic boiler
Upper washing system	One washing and one split rinse spray arms, stainless steel	Noise	Lpa 54,5 dBA
		USB port	Yes
		Protection class	IPX4
		Adjustable feet	Yes
		Drain max. height	600 mm

Lower washing system	One washing and one split rinse spray arms, stainless steel
Tank filter	Stainless steel
Door gasket	On 3 sides
Rack guides	Embossed

Accessories Included


Dish basket	1x PB50D01	Tray basket	1x WB50T03
Cutlery basket	1x PHOOS04	Water supply hose	Yes - 2m
Flat basket	1x PB50G02	Drain hose	Yes - 2m
Grids	1 x WG500		

Equipments

Drain pump	Yes	Option for auto daily switch on	Yes, default OFF
Peristaltic detergent dispenser	Electronic control	Cycle counter	Yes
Peristaltic rinse-aid dispenser	Electronic control	Break tank	Yes
Chemicals level probe	Yes, with optional kit KITSONLIV	Partial renewal of water in the tank and built-in drain pump	Yes
Rinse boiler Thermostop system	Yes - default	Water supply pipe diameter	DN15 - ½"
Wash tank Thermostop system	Yes	Drain supply pipe diameter	DN20-G 3/4"
Wash pump soft start system	Yes	Detergent (red) hose lenght	2,2m
Stand-by system	Yes	Rinse aid (blue) hose lenght	2,2m

Logistic Information

EAN code	8017709348793	Net weight	67,000 kg
Packed product dimensions (WxDxH)	990x660x700 mm	Gross weight (kg)	75,000 kg

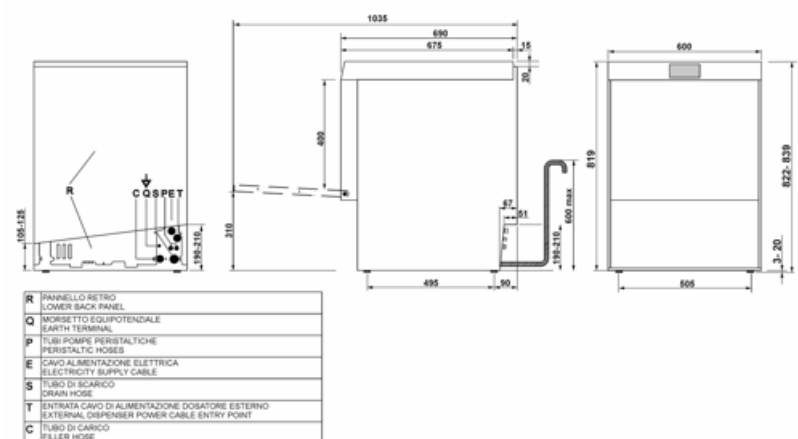

Compatible Accessories




KITSONLIV

Probe level kit for double wall models



KIT-WG500

Trays holder for trays washer




PB50D01

Polypylene basket for 18 plates,
500x500x105 mm




PB50G01

Universal polypylene basket,
500x500x100 mm



PB50G02

Universal flat bottom polypropylene
basket, 500x500x170 mm



PB50T01

Polypropylene basket for 8 trays GN
1/1 h 40 mm



PHOOS01

Polypropylene single basket for cutlery



PHOOS04

4 compartments polypropylene
basket for cutlery



WB50D01

Wire basket for 18 dishes 250 mm max.
diameter or self service trays, 500x500
mm



WB50G01

Universal wire basket with flat
bottom, 500x500x123 mm



WB50G02

Wire basket for 90 mm diameter max
glasses with sloped bottom,
500x500x170 mm



WB50G03

Wire basket for 72 mm diameter
glasses with inclined bottom,
500x500x235 mm



WB50G04

Wire basket for glasses 135 mm
diameter max, with sloped bottom,
500x500x170 mm



WB50PG5

Wire basket for no. 25 plastic glasses
with flat bottom, 500x500x260 mm



WB50T02

Wire basket for 7 trays GN1/1 h 20 mm,
500x500 mm



WB50T03

Wire basket 500x500 mm for 6 trays
GN1/1 h 60 mm and EN6040



WH00S01









Wire insert for 12 small dishes



WS5

Underframe for glasswashers and
dishwashers 500, 595x595x490 mm

Symbols glossary

 A square icon with a black border. Inside, the text "A0=" is at the top, and the number "30" is in a large, bold font below it.	THERMODESINFECTION A0=30	 A square icon with a black border. Inside, the text "A0=" is at the top, and the number "60" is in a large, bold font below it.	THERMODESINFECTION A0=60
 A square icon with a black border. Inside, the text "GN1/1" is at the top, and a stylized graphic of a tray is below it.	SUITABLE FOR GASTRONORM TRAY	 A square icon with a black border. Inside, a stylized graphic of a spray nozzle is shown.	HTR RINSING SYSTEM
 A square icon with a black border. Inside, a stylized graphic of a filter with five stages is shown.	5 STAGE FILTER	 A square icon with a black border. Inside, a stylized "C" shape is shown, with the text "400mm" below it.	MAX. USABLE HEIGHT 400mm
 A square icon with a black border. Inside, a stylized "C" shape is shown, with a Wi-Fi symbol (three curved lines) to its left.	Professional appliance with Wi-fi connectivity and remote control via Remote SmegConnect App.	 A square icon with a black border. Inside, a Wi-Fi symbol (three curved lines) is shown.	Wi-Fi connectivity

Benefit (TT)

Balanced door

Effortless opening and closing

Effortless opening and closing

The counterbalanced door is designed to ensure smooth and effortless opening and closing, providing high user convenience. Additionally, it can be locked in a halfway position, a particularly useful feature for promoting natural drying at the end of the workday, enhancing overall hygiene and preventing the buildup of residual moisture.

5-stage system

Deep cleaning and spotless washes with the patented filtration system

The innovative Smeg filtration system consists of 5 stages to completely eliminate all impurities: the 1st stage captures larger food residues; in the 2nd and 3rd stages, finer particles are captured at this filtration stage; the 4th stage features a pre-filtration grid to prevent debris from entering the tank and clouding the water. Finally, the last stage is designed to further protect the washing and draining pumps from any debris that may accidentally enter the tank during filter cleaning.

The presence sensor filter alerts if the filtration system is out of position, ensuring safe washes every time.

HTR+ System

Self-adaptive rinsing system for intelligent water management

The self-Adaptive HTR+ System monitors and adjusts the rinse volume with each wash cycle. The intelligent rinse management ensures the perfect amount of water and heat on the dishes, delivering consistent, reliable results, cycle after cycle.

Moulded tank

Superior washing performance and enhanced cleaning convenience with molded tub bottoms and basket guides

Smeg dishwashers are designed with moulded tank and basket guides. The absence of sharp edges ensures an optimised wash flow, guaranteeing hygiene and impeccable cleaning performance. Furthermore, this innovative design simplifies machine cleaning, reducing the need for maintenance interventions.

Integral double skin

Thermal and acoustic insulation guaranteed

The double wall is designed to optimise energy efficiency by reducing heat loss and accelerating water heating, resulting in lower energy consumption and faster cycle start-up times. Additionally, it provides effective acoustic insulation, helping to reduce noise and ensuring a quieter, more comfortable working environment for the staff.

Drain pump

Partial water replacement during the wash cycle for clean and hygienic dishes

The standard drain pump, equipped with a partial water exchange system, ensures that the dirtiest water is automatically removed at every wash cycle. This mechanism allows for continuous renewal of the water used, ensuring that each phase of the washing process is carried out with clean water. The result is optimal dishwashing performance, with outstanding efficiency and an impeccable level of hygiene.

Soft-start system

Effective management of the washing pump to protect your glassware

The Soft-Start function initiates the wash cycle gently and gradually, progressively increasing the water pressure. This system has been designed to provide optimal protection for the most fragile items, such as crystal glasses, significantly reducing the risk of chipping or damage. At the same time, it ensures excellent cleaning performance, combining efficiency and safety in every wash cycle.

MyPersonal Wash

10 pre-set washing programmes for a complete and ready-to-use solution.

Each model in the PURA range offers 10 tested programmes, ensuring ready-to-use solutions for any washing requirement. With the MyPersonal Wash function, parameters such as time, temperature, pressure, and washing options can be customised, optimising cycles for delicate dishes or stubborn dirt. The result is a tailored wash, always flawless.

AdaptWash system

Consistently perfect washing pressure for flawless results with every wash

The AdaptWash system offers 3 pressure levels that automatically adjust based on the selected program, ensuring optimal cleaning for every type of load.

Euronorm

Compatibility with EN 600x400 mm trays

The 500x500 traywashers offer great versatility, with the ability to wash up to 6 Euronorm 600x400 mm trays. These features make the products extremely useful for a wide range of activities, such as pizzerias, bakeries, bistros, catering, restaurants, and cafés.

Program visibility

Program selection displayed for simplified dishwasher management

Users can select the programs to be displayed, hiding those that are unnecessary or unused. This feature not only helps prevent improper use of the appliance but also represents a significant step towards fully customising the user experience.