

# SPF516AU

Family	Dishwasher
Subfamily	Undercounter Glasswasher
Type	Raised traywasher
Crockery	Crockery; Cutlery; EN 600x400 trays; GN1/1 trays
Basket dimensions	500x500 mm
Control panel	Electronic
Rinse pump	HTR system
Wash pump	Standard
Power connection	400 V 3N~ / 12 A / 7,3 kW / 50 Hz
Product dimensions WxDxH	600x690x1315 mm



## Distribution

Industries	Hotels; Ristoranti / Catering; Bakeries / Pastry shops; Care facilities ; Catering; Commercial food services; Butcher shops / Delicatessens
------------	--

## Aesthetics

Led color	Green	Serie	Easyline
-----------	-------	-------	----------

## Technical Features

Trays number	7 x GN1/1	Max water hardness	5°f - 3°dH
Trays washing option	Yes	Inlet pressure	100-1000 kPa
Water consumption per cycle	3,2 l	Detergent load	1,5 l/h
Wash temperature (min-max)	60 °C	Rinse load	0,4 l/h
Rinse temperature (min-max)	24 °C - 85 °C	Usable load height	400 mm
Min. water connection temperature	8°C	Depth with open door	1290 mm
Minimum water consumption per cycle	3,2 l	Maximum dishes diameter	415 mm
Max. inlet temperature	60°C		

## Programs

<b>Programs</b>	7 automatic programs; Self-cleaning programs; Cold water rinse program
<b>Program options</b>	Extra rinse; Clean water cycle
<b>Program table</b>	Easyline dishwasher and traywasher 500
<b>Maximum basket/hour</b>	60
<b>Maximum dishes/hour</b>	1080
<b>Maximum glasses/hour</b>	2160

## Electrical Connection

<b>Tank heating element power</b>	2000 W	<b>Default connection</b>	7300 W
<b>Boiler heating element power</b>	6100 W	<b>Electrical connection option</b>	220 V 3~ / 19 A / 6,8 kW / 60 Hz; 220 V 3~ / 19 A / 7,3 kW / 60 Hz; 230 V~ / 15 A / 3,4 kW / 50 Hz; 230 V~ / 17 A / 3,9 kW / 50 Hz; 230 V~ / 20 A / 4,5 kW / 50 Hz; 230 V~ / 22 A / 5,0 kW / 50 Hz; 400 V 3N~ / 12 A / 6,8 kW / 50 Hz
<b>Wash pump power</b>	700 W	<b>Plug</b>	No

## Interface

<b>Display</b>	8 digit	<b>Cycle progress alert</b>	Yes
<b>On/Off button</b>	Yes	<b>End-cycle alert</b>	Yes
<b>Rinse aid missing alert</b>	Yes	<b>Manual diagnostic</b>	Yes
<b>Detergent missing alert</b>	Yes		

## Construction

<b>Tank Construction</b>	Deep drawn Double wall	<b>Rack guides</b>	Embossed
<b>Tank material</b>	Stainless steel AISI 304	<b>Filter</b>	5-stages filter system
<b>Back panel</b>	St/steel	<b>Tank capacity</b>	11 l
<b>Balanced door</b>	Yes	<b>Boiler capacity</b>	6,5 l
<b>Upper washing system</b>	One washing and one split rinse spray arms, stainless steel	<b>Boiler type</b>	Atmosferic boiler
<b>Lower washing system</b>	One washing and one split rinse spray arms, stainless steel	<b>Rumorosità</b>	Lpa 54,5 dBA
<b>Tank filter</b>	Stainless steel	<b>Protection class</b>	IPX4
<b>Door gasket</b>	On 3 sides	<b>Adjustable feet</b>	Yes
		<b>Drain max. height</b>	600 mm

## Accessories Included


Flat basket	1x PB50G02	Water supply pipe	In acciaio Watermark
Grids	1 x PRF500	Drain pipe	Yes - 2m
Tray basket	WB50T03		

## Equipments

Drain pump	Yes	Option for auto daily switch on	Yes, default OFF
Peristaltic detergent dispenser	Yes, electronic control	Cycle counter	Yes
Peristaltic rinse-aid dispenser	Yes, electronic control	Break tank	Yes
Chemicals level probe	Yes, optional KITSONLIV	Partial renewal of water in the tank and built-in drain pump	Yes
Rinse boiler Thermostop system	Yes - default	Water supply pipe diameter	DN15 - ½"
Wash tank Thermostop system	Yes	Drain supply pipe diameter	DN20-G 3/4"
Wash pump soft start system	Yes	Detergent (red) hose length	2,2 m
Stand-by system	Yes	Rinse aid (blue) hose length	2,2 m

## Logistic Information

EAN code	8017709345716	Net weight	88,000 kg
Packed product dimensions (WxDxH)	1470x660x700 mm	Gross weight (kg)	98,000 kg

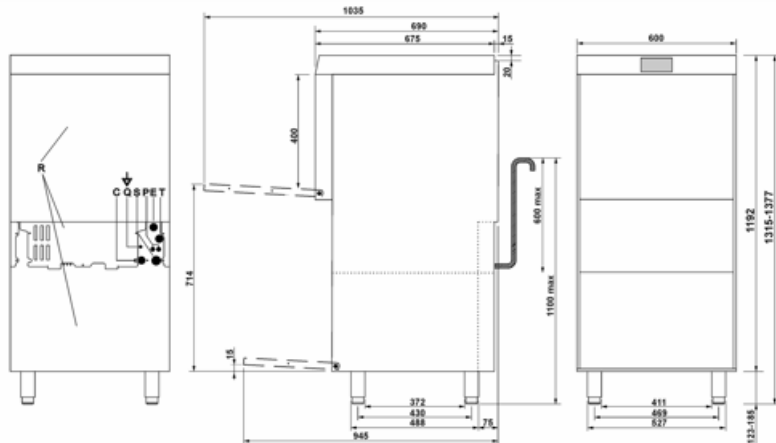


R	PANNELLO RETRO LOWER BACK PANEL
Q	MORSETTO EQUIPOTENZIALE EARTH TERMINAL
P	TUBI POMPE PERISTALTICHE PERISTALTIC HOSES
E	CAVO ALIMENTAZIONE ELETTRICA ELECTRICITY SUPPLY CABLE
S	TUBO DI SCARICO DRAIN HOSE
T	ENTRATA CAVO DI ALIMENTAZIONE DOSATORE ESTERNO EXTERNAL DISPENSER POWER CABLE ENTRY POINT
C	TUBO DI CARICO FILLER HOSE


## Compatible Accessories




**KITSONLIV**  
Probe level kit



**KIT-WG500**  
Support grid for tray washer, dim.  
(WxD) 500x500 mm



**PB50D01**  
Basket made of polypylene for 18 plates  
500x500



**PB50G02**  
Universal basket in polypropylene  
500x500



**PB50T01**  
Polypropylene basket for 8 trays GN 1/1  
h 40 mm



**PHOOS01**  
Single basket in polypropylene for  
cutlery



**PHOOS04**  
4 compartments polypropylene basket  
for cutlery



**WB50D01**  
Wire basket for 18 dishes and trays  
500X500



**WB50T02**  
Wire basket for 5 trays 600x500



**WB50T03**  
Wire basket for 5 trays 600x500



**WH00S01**  
Wire insert for 12 small dishes

## Benefit (TT)

---

### Balanced door

Effortless opening and closing

Effortless opening and closing

The counterbalanced door is designed to ensure smooth and effortless opening and closing, providing high user convenience. Additionally, it can be locked in a halfway position, a particularly useful feature for promoting natural drying at the end of the workday, enhancing overall hygiene and preventing the buildup of residual moisture.

### 5-stage system

Deep cleaning and spotless washes with the patented filtration system

The innovative Smeg filtration system consists of 5 stages to completely eliminate all impurities: the 1st stage captures larger food residues; in the 2nd and 3rd stages, finer particles are captured at this filtration stage; the 4th stage features a pre-filtration grid to prevent debris from entering the tank and clouding the water. Finally, the last stage is designed to further protect the washing and draining pumps from any debris that may accidentally enter the tank during filter cleaning.

The presence sensor filter alerts if the filtration system is out of position, ensuring safe washes every time.

### HTR System

Consistent temperatures and pressures for uniform and effective dishwashing

Thanks to the HTR system (High Temperature Rinse) and the presence of the atmospheric boiler combined with the Thermostop, the cold inlet water does not enter the boiler during rinsing, ensuring a constant temperature of 85°C. The HTR system keeps the water hot for deep sanitisation and quick drying, ensuring constant pressure for uniform and effective cleaning.

### Moulded tank

Superior washing performance and enhanced cleaning convenience with molded tub bottoms and basket guides

Smeg dishwashers are designed with moulded tank and basket guides. The absence of sharp edges ensures an optimised wash flow, guaranteeing hygiene and impeccable cleaning performance. Furthermore, this innovative design simplifies machine cleaning, reducing the need for maintenance interventions.

### Integral double skin

Thermal and acoustic insulation guaranteed

The double wall is designed to optimise energy efficiency by reducing heat loss and accelerating water heating, resulting in lower energy consumption and faster cycle start-up times. Additionally, it provides effective acoustic insulation, helping to reduce noise and ensuring a quieter, more comfortable working environment for the staff.

### Drain pump

Partial water replacement during the wash cycle for clean and hygienic dishes

The standard drain pump, equipped with a partial water exchange system, ensures that the dirtiest water is automatically removed at every wash cycle. This mechanism allows for continuous renewal of the water used, ensuring that each phase of the washing process is carried out with clean water. The result is optimal dishwashing performance, with outstanding efficiency and an impeccable level of hygiene.

### **Soft-start system**

Effective management of the washing pump to protect your glassware

The Soft-Start function initiates the wash cycle gently and gradually, progressively increasing the water pressure. This system has been designed to provide optimal protection for the most fragile items, such as crystal glasses, significantly reducing the risk of chipping or damage. At the same time, it ensures excellent cleaning performance, combining efficiency and safety in every wash cycle.

### **Raised version**

Easy and fast dishwasher loading and unloading operations

The raised design facilitates loading and unloading dishes, making these tasks faster and more efficient. This results in significant time savings, especially valuable in high-intensity work environments. The space below the dishwasher can be used to store detergents, utensils, or other accessories, providing a practical solution to optimise space usage, particularly in compact kitchens.