SPF516S

Type	Raised traywasher
Crockery	Crockery; Cutlery; EN 600x400 trays; GN1/1 trays
Basket dimensions	500x500 mm
Control panel	Electronic
Standard drain pump with partial water renewal in the wash tank	Yes
Rinse pump	HTR system
Boiler type	Atmosferic boiler
Wash pump	Standard
Power connection	400 V 3N~ / 12 A / 7,3 kW / 50 Hz
Product dimensions (WxDxH)	600x690x1315 mm



Target

Industries	Hotels, Restaurants, Bakeries / Pastry shops, Care facilities , Catering, Commercial food services, Butcher shops / Delicatessens

Aesthetics

Led color		**Series**	Easyline

Technical Features

Trays number	7 x GN1/1; 6 x EN 600x400
Trays washing option	Yes
Water consumption per cycle	3,2 l
Min. water connection temperature	5°C
Minimum water consumption per cycle	3,2 l
Max. inlet temperature	60°C
Max water hardness	60°f - 34°dH
Inlet pressure	100-1000 kPa (min-max)
Detergent load	1,5 l/h
Rinse load	0,4 l/h
Usable load height	400 mm
Depth with open door	1290 mm
Maximum dishes diameter	415 mm

Programs

Programs	6 automatic programs; 1 fully customizable program; Self-cleaning programs
Program options	Extra rinse, Clean water cycle
Program table	Easyline dishwasher, glasswasher and traywasher 500
Maximum basket/hour	51
Maximum dishes/hour	720
Maximum glasses/hour	2160

Electrical Connection

Tank heating element power	2000 W
Boiler heating element power	6100 W
Wash pump power	700 W
Default connection	7300 W
Optional electrical connection	220 V 3~ / 19 A / 6,8 kW / 60 Hz; 220 V 3~ / 19 A / 7,3 kW / 60 Hz; 230 V~ / 15 A / 3,4 kW / 50 Hz ; 230 V~ / 17 A / 3.9 kW / 50 Hz; 230 V~ / 20 A / 4,5 kW / 50 Hz ; 230 V~ / 22 A / 5,0 kW / 50 Hz; 400 V 3N~ / 12 A / 6,8 kW / 50 Hz
Potential equalisation	Yes
Plug	Not present

Interface

Display	8 digit
On/Off button	Yes
Salt alert	Yes
Rinse aid missing alert	Yes
Detergent missing alert	Yes
Cycle progress alert	Yes
End-cycle alert	Yes
Manual diagnostic	Yes

Construction

Tank	Deep drawn
Construction	Integral double-skin
Tank material	Stainless steel AISI 304
Back panel	St/steel
Balanced door	Yes
Upper wash system	One wash and one split rinse spray arms, stainless steel
Lower wash system	One wash and one split rinse spray arms, stainless steel
Tank filter	Stainless steel
Door gasket	On 3 sides
Rack guides	Embossed
Filter	5-stage filter system
Tank capacity	11 l
Boiler capacity	6.5 l
Noise	Lpa 54,5 dBA
Protection class	IPX4
Adjustable feet	Yes
Drain max. height	600 mm
Power cable length	180 cm

Accessories included

Cutlery basket	1x PHOOS04
Flat basket	1x PB50G02
Grids	1 x KIT-WG500
Water supply hose	Yes - 2 m
Drain hose	Yes - 2m

Equipments

Peristaltic detergent dispenser	Electronic control	**Option for auto daily switch on**	Yes, default OFF
Peristaltic rinse-aid dispenser	Electronic control	**Cycle counter**	Yes
Chemicals level probe	Yes, with optional kit KITSONLIV	**Break tank**	Yes
Automatic built softener	Yes	**Water supply pipe diameter**	DN15 - ½”
Rinse boiler Thermostop system	Yes - default	**Drain supply pipe diameter**	DN20-G 3/4"
Wash tank Thermostop system	Yes	**Detergent (red) hose length**	2,2 m
Wash pump soft start system	Yes	**Rinse aid (blue) hose length**	2,2 m
Stand-by system	Yes		

Logistic Information

EAN code	8017709345747	**Net weight**	91.000 kg
Packed product dimensions (WxDxH)	660x700x1470 mm	**Gross weight**	101.000 kg

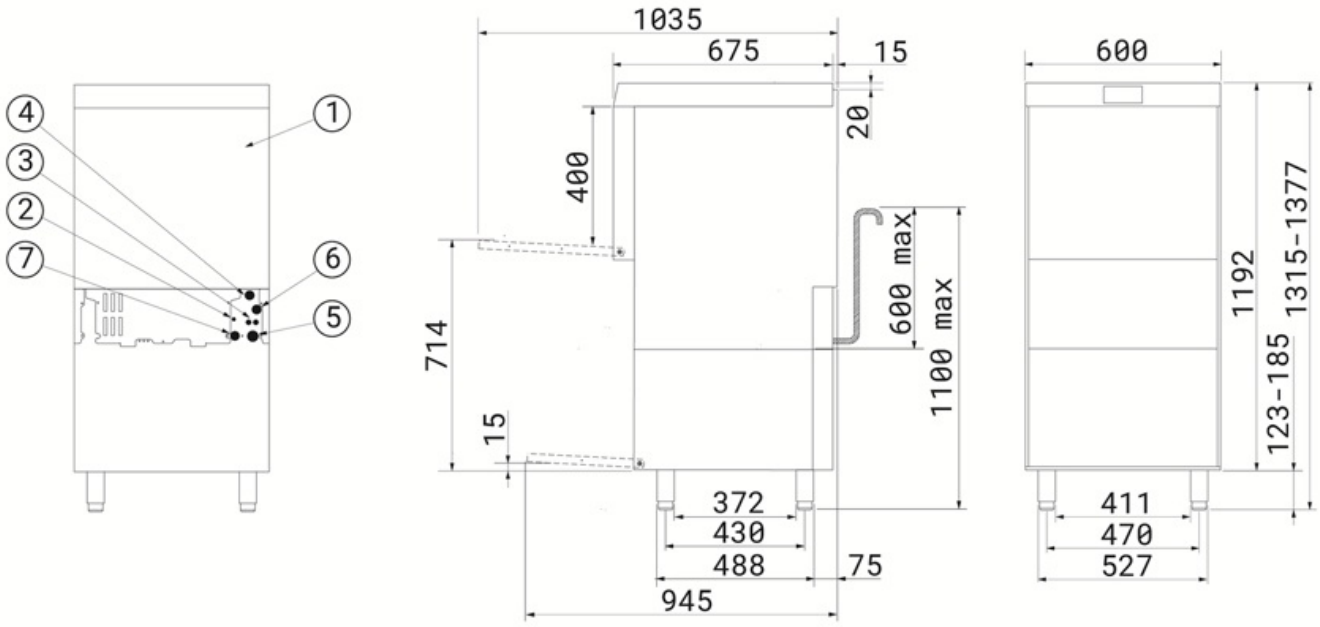

1	PANNELLO RETRO - LOWER BACK PANEL
2	MORSETTO EQUIPOTENZIALE - EARTH TERMINAL
3	TUBI POMPE PERISTALTICHE - PERISTALTIC HOSES
4	CAVO ALIMENTAZIONE ELETTRICA - ELECTRICITY SUPPLY CABLE
5	TUBO DI SCARICO - DRAIN HOSE
6	ENTRATA CAVO DI ALIMENTAZIONE DOSATORE ESTERNO - EXTERNAL DISPENSER POWER CABLE ENTRY POINT
7	TUBO DI CARICO - FILLER HOSE

Compatible Accessories

KITSONLIV



Probe level kit

KIT-WG500



Support grid for tray washer, dim. (WxD) 500x500 mm

PB50D01



Polypropylene basket for 18 plates Ø250 mm max, dim.(WxDxH) 500x500x105 mm

PB50G02



Universal flat bottom polypropylene basket, internal height 150 mm, dim. (WxDxH) 500x500x170 mm

PB50T01



Polypropylene basket for 8 trays GN 1/1 h 40 mm for traywasher and hood-type models. Vertical row spacing 68 mm and horizontal row spacing 54 mm, dim. (WxDxH) 500x500x105 mm

PHOOS01



Polypropylene single basket for cutlery

PHOOS04



4 compartments polypropylene basket for cutlery

WB50D01



Wire basket for 18 dishes Ø250 mm max or trays h 370 mm, dim. (WxDxH) 500X500x92 mm

WB50T02



Wire basket for 7 trays GN1/1 h 20 mm, dim. (WxD) 500x500 mm

WB50T03



Wire basket for 6 trays GN1/1 h 60 mm and EN 600x400 mm for double-skin model. 64 mm row spacing, dim. (WxDxH) 500x500x206 mm

WH00S01



Wire insert for 17 small dishes, width 100 mm, for flat bottom baskets 500x500 and 600x500 mm

Benefit (TT)

Balanced door

Effortless opening and closing

The counterbalanced door is designed to ensure smooth and effortless opening and closing, providing high user convenience. Additionally, it can be locked in a halfway position, a particularly useful feature for promoting natural drying at the end of the workday, enhancing overall hygiene and preventing the buildup of residual moisture.

5-stage system

Deep cleaning and spotless washes with the patented filtration system

The innovative Smeg filtration system consists of 5 stages to completely eliminate all impurities: the 1st stage captures larger food residues; in the 2nd and 3rd stages, finer particles are captured at this filtration stage; the 4th stage features a pre-filtration grid to prevent debris from entering the tank and clouding the water. Finally, the last stage is designed to further protect the washing and draining pumps from any debris that may accidentally enter the tank during filter cleaning.

HTR System

Consistent temperatures and pressures for uniform and effective dishwashing

Thanks to the HTR system (High Temperature Rinse) and the presence of the atmospheric boiler combined with the Thermostop, the cold inlet water does not enter the boiler during rinsing, ensuring a constant rinsing temperature according to the program setting. The HTR system keeps the water hot for deep sanitisation and quick drying, ensuring constant pressure for uniform and effective cleaning.

Moulded tank

Superior washing performance and enhanced cleaning convenience with molded tub bottoms and basket guides

Smeg dishwashers are designed with moulded tank and basket guides. The absence of sharp edges ensures an optimised wash flow, guaranteeing hygiene and impeccable cleaning performance. Furthermore, this innovative design simplifies machine cleaning, reducing the need for maintenance interventions.

Integrated softener

Effective water treatment for consistently sparkling glasses

The integrated continuous regeneration water softener ensures effective water treatment, enhancing washing performance and preserving the machine's operational lifespan. The resin regeneration process takes place during the wash cycle without interruptions, providing constant control over water hardness. This system prevents limescale buildup, maximises detergent efficiency, and guarantees spotless results on glassware and dishes.

Raised version

Easy and fast dishwasher loading and unloading operations

The raised design facilitates loading and unloading dishes, making these tasks faster and more efficient. This results in significant time savings, especially valuable in high-intensity work environments.
The space below the dishwasher can be used to store detergents, utensils, or other accessories, providing a practical solution to optimise space usage, particularly in compact kitchens.

Integral double-skin

Thermal and acoustic insulation guaranteed

The double-skin design of undercounter dishwashers is engineered to optimise energy efficiency by minimising heat loss and accelerating water heating, resulting in lower energy consumption and faster start-up times. Additionally, it provides effective sound insulation, helping to reduce noise levels and ensuring a quieter, more comfortable working environment for staff.

Drain pump

Partial water replacement during the wash cycle for clean and hygienic dishes

The standard drain pump, equipped with a partial water exchange system, ensures that the dirtiest water is automatically removed at every wash cycle. This mechanism allows for continuous renewal of the water used, ensuring that each phase of the washing process is carried out with clean water. The result is optimal dishwashing performance, with outstanding efficiency and an impeccable level of hygiene.

Soft-start system

Effective management of the washing pump to protect your glassware

The Soft-Start function initiates the wash cycle gently and gradually, progressively increasing the water pressure. This system has been designed to provide optimal protection for the most fragile items, such as crystal glasses, significantly reducing the risk of chipping or damage. At the same time, it ensures excellent cleaning performance, combining efficiency and safety in every wash cycle.

Euronorm

Compatibility with EN 600x400 mm trays

These models offer great versatility, with the ability to wash up to 6 Euronorm 600x400 mm trays. These features make the products extremely useful for a wide range of activities, such as pizzerias, bakeries, bistros, catering, restaurants, and cafés.