

SPF525S

Familia	Lavavajillas
Subfamilia	Lavavasos bajo barra
Tipología	Raised Dishwasher
Crockery	Crockery; Glasses; Cutlery; GN1/1 trays
Dimensiones de la cesta	500x500 mm
Panel de control	Topline 2016
Rinse pump	Self-Adaptive HTR+
Wash pump	Variable speed AdaptWash
Conexión eléctrica	400 V 3N~ / 15 A / 8,4 kW / 50 Hz
Product dimensions (WxDxH)	600x600x1315 mm



Distribución

Industries	Bar / Cafeterias / Bistros / Wine bars / Pubs; Hoteles; Restaurants; Bakeries / Pastry shops; Care facilities ; Grocery shops / Food retail; Catering; Commercial food services; Butcher shops / Delicatessens
-------------------	--

Estética

Color Led	Blanco	Serie	Pura
------------------	--------	--------------	------

Características técnicas

Trays number	7 x GN1/1	Max. inlet temperature	60°C
Trays washing option	Sí	Dureza máxima del agua	60°F - 34°dH
Water consumption per cycle	2,5 l	Entrada de agua	100-1000 kPa (min-max)
Wash temperature (min-max)	60 °C - 70 °C	Dosificador de detergente peristáltico	Si, manual
Rinse temperature (min-max)	65 °C - 87 °C	Dosificador de detergente peristáltico	Si, manual
Cold rinse temperature	24 °C	Altura útil de carga	400 mm
Entrada de agua	5°C	Profundidad puerta abierta	1022 mm
Minimum water consumption per cycle	1,8 l		

Programas

Programs	10 programas personalizables; Programas de autolimpieza
Program options	Aclarado extra; Ciclo de agua limpia
Program table	Pura dishwasher 500
Program visibility	Sí
Máximo cesto / hora	60
Máximo platos / hora	1080
Máximo copas / hora	2160

Connectivity

SmegConnect Pro Connectivity	Sí Wi-Fi	PST certificate support period [UK]	24 months
		UK PSTI support period end date	2027-12-31

Conexión eléctrica

Tank heating element power	2000 W	Conexión por defecto	8400 W
Boiler heating element power	5700 W	Opción de conexión eléctrica	230 V 3~ / 24 A / 8,4 kW / 50 Hz; 230 V~ / 14 A / 3,1 kW / 50 Hz; 230 V~ / 31 A / 7,1 kW / 50 Hz
Wash pump power	700 W	Enchufe	No

Interface

Pantalla	TFT	Alerta falta de detergente	Sí
Botón ON/OFF	Sí	Alerta de progreso del ciclo	Sí
Alerta de sal	Sí	Alerta de fin de ciclo	Sí
Alerta de falta de abrillantador	Sí	Diagnostico manual	Sí

Construcción

Cuba	Profundidad del dibujo	Bomba de desagüe	Sí
Construcción de la cuba	Pared Doble	Filter presence sensor	Sí
Material de la cuba	Acero inoxidable AISI 304	Capacidad de la cuba	11 l
Panel trasero	Acero inoxidable	Volumen del calderín	6,5 l
Puerta equilibrada	Sí	Boiler type	Artmosferic boiler
Upper wash system	Un brazo rociador para lavado y un brazo rociador para aclarado, de acero inoxidable.	Ruido	Lpa 54,5 dBA
		Puerto USB	Sí
		Clase de protección	IPX4
		Adjustable feet	Sí

Lower wash system	Un brazo rociador para lavado y un brazo rociador dividido para aclarado, de acero inoxidable.	Profundidad de carga	600 mm
Filtro de la cuba	Acero inoxidable		
Junta de la puerta	En 3 lados		
Guías de estante	En relieve		
Hood elevation system	Manual		

Equipo accesorios incluidos


Cesta de platos	PB50D01	Tubería de suministro de agua	Si - 2m
Cesta de cubiertos	1x PHOOS04	Tubo de desagüe	Sí - 2m
Cesta plana	1x PB50G02		

Equipamiento

Bomba de desagüe	Sí	Option for auto daily switch on	Si, por defecto desactivado
Peristaltic detergent dispenser	Si, control electrónico	Contador de ciclos	Sí
Peristaltic rinse-aid dispenser	Si, control electrónico	Tanque de rotura	Sí
Nivel de productos químicos	Si, opcional KITSONLIV	Renovación parcial del agua en el tanque e incorporación bomba de drenaje	Sí
Descalcificador incorporado	Sí	Diámetro del tubo de entrada de agua	Si - 1,5m
Rinse boiler Thermostop system	Yes - default	Diámetro del tubo de desagüe	Si - 2m
Wash tank Thermostop system	Sí	Dosificador de detergente peristáltico	Si, manual
Wash pump soft start system	Sí	Dosificador de detergente peristáltico	Si, manual
Stand-by system	Sí		

Datos logísticos

Código EAN	8017709348502	Peso neto	89,000 kg
Packed product dimensions (WxDxH)	1470x660x700 mm	Peso bruto (kg)	99,000 kg

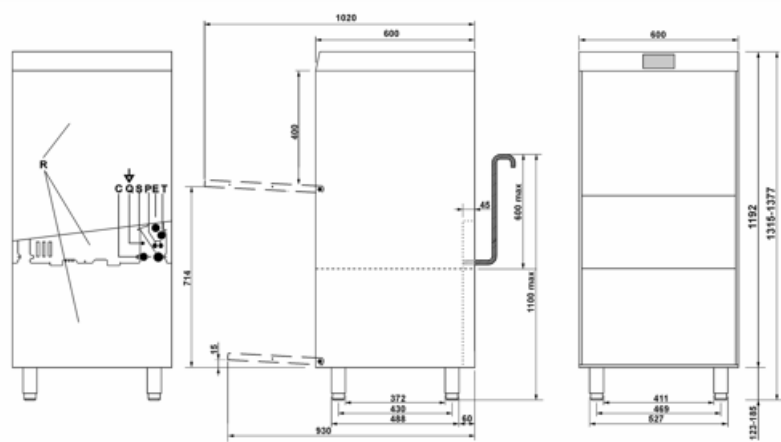

R	PANNELLO RETRO LOWER BACK PANEL
Q	MORSETTO EQUIPOTENZIALE EARTH TERMINAL
P	TUBI POMPE PERISTALTICHE PERISTALTIC HOSES
E	CAVO ALIMENTAZIONE ELETTRICA ELECTRICITY SUPPLY CABLE
S	TUBO DI SCARICO DRAIN HOSE
T	ENTRATA CAVO DI ALIMENTAZIONE DOSATORE ESTERNO EXTERNAL DISPENSER POWER CABLE ENTRY POINT
C	TUBO DI CARICO FILLER HOSE

Accesorios Compatible



KITSONLIV

Probe level kit




PB50G01

Universal flat bottom polypropylene basket, internal height 73 mm, dim. (WxDxH) 500x500x100 mm



PHOOS01



WB50D01

Cesta de alambre para 18 platos 250 mm máx. bandejas de diámetro o autoservicio, 500X500mm



WB50G02

Cesta de alambre para vasos de 90 mm de diámetro máximo con fondo inclinado, 500x500x170 mm



WB50G04

Cesta de alambre para vasos de 135 mm de diámetro máximo, con fondo inclinado, 500x500x170 mm




WB50T02

Cesta de alambre para 7 bandejas GN1/1 h 20 mm, 500x500 mm




WS5

Estructura inferior para lavavasos 500, 595x595x490 mm



PB50D01

Cesta de polipropileno para 18 platos, 500x500x105 mm



PB50G02

Cesta universal de polipropileno de fondo plano, 500x500x170 mm



PHOOS04

4 compartments polypropylene basket for cutlery



WB50G01

Cesta de alambre universal con fondo plano, 500x500x123 mm



WB50G03

Cesta de alambre para vasos de 72 mm de diámetro con fondo inclinado, 500x500x235 mm



WB50PG5

Wire basket with flat bottom for 25 plastic glasses, max. H 230 mm, min.-max. Ø 36-95 mm, dim. (WxDxH) 500x500x260 mm



WH00S01

Benefit (TT)

Balanced door

Effortless opening and closing

The counterbalanced door is designed to ensure smooth and effortless opening and closing, providing high user convenience. Additionally, it can be locked in a halfway position, a particularly useful feature for promoting natural drying at the end of the workday, enhancing overall hygiene and preventing the buildup of residual moisture.

5-stage system

Deep cleaning and spotless washes with the patented filtration system

The innovative Smeg filtration system consists of 5 stages to completely eliminate all impurities: the 1st stage captures larger food residues; in the 2nd and 3rd stages, finer particles are captured at this filtration stage; the 4th stage features a pre-filtration grid to prevent debris from entering the tank and clouding the water. Finally, the last stage is designed to further protect the washing and draining pumps from any debris that may accidentally enter the tank during filter cleaning.

HTR+ System

Self-adaptive rinsing system for intelligent water management

The self-Adaptive HTR+ System monitors and adjusts the rinse volume with each wash cycle. The intelligent rinse management ensures the perfect amount of water and heat on the dishes, delivering consistent, reliable results, cycle after cycle.

Cuba moldeada

Rendimiento de lavado superior y mayor comodidad de limpieza gracias a fondos de cuba y guías de cestas moldeados.

Los lavavajillas Smeg están diseñados con cuba moldeada y guías para las cestas. La ausencia de bordes afilados garantiza un flujo de lavado optimizado, asegurando higiene y un rendimiento de limpieza impecable. Además, este diseño innovador simplifica la limpieza del aparato, reduciendo la necesidad de intervenciones de mantenimiento.

Integrated softener

Effective water treatment for consistently sparkling glasses

The integrated continuous regeneration water softener ensures effective water treatment, enhancing washing performance and preserving the machine's operational lifespan. The resin regeneration process takes place during the wash cycle without interruptions, providing constant control over water hardness. This system prevents limescale buildup, maximises detergent efficiency, and guarantees spotless results on glassware and dishes.

Integral double-skin

Thermal and acoustic insulation guaranteed

The double-skin design of undercounter dishwashers is engineered to optimise energy efficiency by minimising heat loss and accelerating water heating, resulting in lower energy consumption and faster start-up times. Additionally, it provides effective sound insulation, helping to reduce noise levels and ensuring a quieter, more comfortable working environment for staff.

Drain pump

Partial water replacement during the wash cycle for clean and hygienic dishes

The standard drain pump, equipped with a partial water exchange system, ensures that the dirtiest water is automatically removed at every wash cycle. This mechanism allows for continuous renewal of the water used, ensuring that each phase of the washing process is carried out with clean water. The result is optimal dishwashing performance, with outstanding efficiency and an impeccable level of hygiene.

Soft-start system

Effective management of the washing pump to protect your glassware

The Soft-Start function initiates the wash cycle gently and gradually, progressively increasing the water pressure. This system has been designed to provide optimal protection for the most fragile items, such as crystal glasses, significantly reducing the risk of chipping or damage. At the same time, it ensures excellent cleaning performance, combining efficiency and safety in every wash cycle.

Raised version

Easy and fast dishwasher loading and unloading operations

The raised design facilitates loading and unloading dishes, making these tasks faster and more efficient. This results in significant time savings, especially valuable in high-intensity work environments. The space below the dishwasher can be used to store detergents, utensils, or other accessories, providing a practical solution to optimise space usage, particularly in compact kitchens.

Mi Lavado Personal

10 programas personalizables para satisfacer todas las necesidades de lavado

Cada modelo de la gama PURA ofrece 10 programas probados, asegurando soluciones listas para cualquier necesidad de lavado. Con la función MyPersonal Wash, se pueden personalizar parámetros como el tiempo, la temperatura, la presión y las opciones de lavado, optimizando los ciclos para vajilla delicada o suciedad resistente. El resultado es un lavado a medida, siempre impecable.

AdaptWash system

Consistently perfect washing pressure for flawless results with every wash

The AdaptWash system offers 3 pressure levels that automatically adjust based on the selected program, ensuring optimal cleaning for every type of load.

Hood lift

Unprecedented comfort with the patented lifting system

The new ergonomic handle, combined with the patented lifting system, minimises the effort required to open and close the hood, limiting it to just 2.5 kg. This system ensures an exceptionally smooth and lightweight operation, helping to protect the operator's health and well-being, even during extended use.

Program visibility

Program selection displayed for simplified dishwasher management

Users can select the programs to be displayed, hiding those that are unnecessary or unused. This feature not only helps prevent improper use of the appliance but also represents a significant step towards fully customising the user experience.