

SPG400ML

Family	Professional dishwasher
Subfamily	Undercounter
Type	Undercounter high-reduced glasswasher
Crockery	Crockery; Glasses; Cutlery
Basket dimensions	400x400 mm
Control panel	Mechanical
Wash pump	Standard
Power connection	230 V~ / 13 A / 3,0 kW / 50 Hz
Product dimensions (WxDxH)	440x555x670 mm



Aesthetics

Series	Ecoline
---------------	---------

Technical Features

Water consumption per cycle	3 l	Max water hardness	12°f - 7°dH
Inlet pressure			250-1000 kPa (min-max)
Wash temperature (min-max)	60 °C	Detergent load	1,5 l/h
Rinse temperature (min-max)	83 °C	Rinse load	0,4 l/h
Min. water connection temperature	5°C	Usable load height	309 mm
Minimum water consumption per cycle	3 l	Depth with open door	882 mm
Max. inlet temperature	60°C		

Programs

Programs	2 automatic programs; Self-cleaning programs
Program table	Mechanical Ecoline glasswasher
Maximum basket/hour	40
Maximum dishes/hour	320
Maximum glasses/hour	1000

Electrical Connection

Tank heating element power	2000 W	Default connection	3000 W
Boiler heating element power	2700 W	Plug	(F;E) Schuko
Wash pump power	290 W		

Interface

Number of buttons	4	On/Off button	Yes
--------------------------	---	----------------------	-----

Construction

Tank	Deep drawn	Filter	4-stage filter system
Construction	Partial double-skin	Tank capacity	8 l
Tank material	Stainless steel AISI 304	Boiler capacity	4,5 l
Back panel	Galvanized	Boiler type	Pressure boiler
Upper wash system	One wash and one split rinse spray arms, stainless steel	Noise	Lpa 52,6 dBA
Lower wash system	One wash and one combined rinse spray arms, stainless steel and plastic	Protection class	IPX4
Tank filter	Plastic	Adjustable feet	Yes
Door gasket	Only up	Drain max. height	600 mm
Rack guides	Embossed		

Accessories included

Cutlery basket	1x PHOOS01	Water supply hose	Yes - 1,5 m
Flat basket	2x PB40G01	Drain hose	Yes - 2m

Equipments

Drain pump	Yes	Wash pump soft start system	Yes
Peristaltic detergent dispenser	Manual	Partial renewal of water in the tank and built-in drain pump	Yes
Peristaltic rinse-aid dispenser	Manual	Water supply pipe diameter	DN15 - 1/2"
Default chemicals dosing unit of measure	gr/lt	Drain supply pipe diameter	DN20-G 3/4"
Rinse boiler Thermostop system	Yes - default	Detergent (red) hose lenght	2,2 m
Wash tank Thermostop system	Yes	Rinse aid (blue) hose lenght	2,2 m

Logistic Information

EAN code

8017709346232

Net weight

41,000 kg


Packed product

820x510x630 mm

Gross weight

47,000 kg

dimensions (WxDxH)

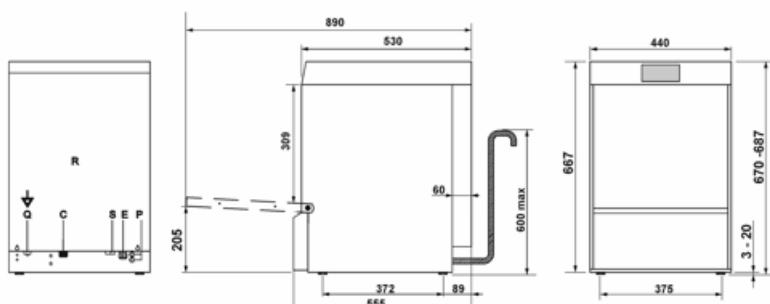

R	Pannello retro	Lower back panel
Q	Morsetto equipotenziale	Earth terminal
C	Tubo di carico	Filler hose
S	Tubo di scarico	Drain hose
P	Tubi pompa peristaltiche	Peristaltic hoses
E	Cavo alimentazione elettrica	Electricity supply cable

Compatible Accessories

KITRB40G01

Kit of 2 wire round baskets and adaptor for Ecoline



PB40C02

Universal flat bottom polypropylene double basket, 20 small dishes upper basket, internal height lower basket 120 mm, dim.(WxDxH) 400x400x227 mm




PHOOGR4

Tilted glass holder insert, configurable with up to 4 units of 4 glasses each, for PB40G01 basket 400x400 mm



RB40A3

Adapter for round basket for all 400 glasswasher models 460 mm wide



WB40D01

Wire basket for 8 dishes Ø315 mm max, dim. (WxD) 400x400 mm



WB40G02

Wire basket with sloped bottom for glasses 16 Ø90 mm max, dim. (WxDxH) 400x400x168 mm



WB40PG4

Wire basket for 16 plastic glasses, max. H 180 mm, min.-max. Ø 36-95 mm, dim. (WxDxH) 400x400x210 mm



WS4

Stainless steel underframe for undercounter glasswashers 400 mm, dim. (WxDxH) 495x530x490 mm



WH00S01

Wire insert for 17 small dishes, width 100 mm, for flat bottom baskets 500x500 and 600x500 mm



Symbols glossary



4 STAND FILTER



MAX.USABLE HEIGHT 309mm

Benefit (TT)

4-stage filtration system

Deep cleaning and spotless washes with the Patented 4-Stages Filtration System

The innovative Smeg filtration system consists of 4 stages to completely eliminate all impurities: the 1st stage captures larger food residues; in the 2nd stages, finer particles are captured at this filtration stage; the 3rd stage features a pre-filtration grid to prevent debris from entering the tank and clouding the water. Finally, the last stage is designed to further protect the washing and draining pumps from any debris that may accidentally enter the tank during filter cleaning.

Moulded tank

Superior washing performance and enhanced cleaning convenience with molded tub bottoms and basket guides

Smeg dishwashers are designed with moulded tank and basket guides. The absence of sharp edges ensures an optimised wash flow, guaranteeing hygiene and impeccable cleaning performance. Furthermore, this innovative design simplifies machine cleaning, reducing the need for maintenance interventions.

Partial double-skin

Optimised thermal and acoustic insulation

The Ecoline undercounter dishwashers are equipped with a partial double-skin structure that optimises energy efficiency by minimising heat loss. Additionally, it provides effective acoustic insulation, helping to reduce noise levels and ensuring a quieter, more comfortable working environment for staff.

Drain pump

Partial water replacement during the wash cycle for clean and hygienic dishes

The standard drain pump, equipped with a partial water exchange system, ensures that the dirtiest water is automatically removed at every wash cycle. This mechanism allows for continuous renewal of the water used, ensuring that each phase of the washing process is carried out with clean water. The result is optimal dishwashing performance, with outstanding efficiency and an impeccable level of hygiene.

Soft-start system

Effective management of the washing pump to protect your glassware

The Soft-Start function initiates the wash cycle gently and gradually, progressively increasing the water pressure. This system has been designed to provide optimal protection for the most fragile items, such as crystal glasses, significantly reducing the risk of chipping or damage. At the same time, it ensures excellent cleaning performance, combining efficiency and safety in every wash cycle.

Mechanical Interface

Control panel with mechanical buttons

The mechanical version is equipped with 4 buttons: one for powering the appliance on and off, one for starting the wash cycle, one for selecting the cycle, and a button for draining the tank and initiating the final self-cleaning. The panel also includes two indicator lights that provide important information, such as low salt levels and the boiler status.