

SPG403M

Familia	Lavavajillas
Subfamilia	Undercounter glasswashers
Dimensiones de la cesta	400x400 mm
Wash pump	Standard
Conexión eléctrica	230 V~ / 14 A / 3,1 kW /50 Hz



Distribución

Usuarios potenciales Cafeterías - Vinotecas

Estética

Serie Ecoline

Características técnicas

Water consumption per cycle	3 l	Entrada de agua	250-1000 kPa (min-max)
Wash temperature (min-max)	60 °C	Dosificador de detergente peristáltico	Si, manual
Rinse temperature (min-max)	83 °C	Dosificador de detergente peristáltico	Si, manual
Minimum water consumption per cycle	3 l	Altura útil de carga	309 mm
Entrada de agua	5°C	Profundidad puerta abierta	882 mm
Max. inlet temperature	60°C	Product dimensions WxDxH	440x555x695 mm
Dureza máxima del agua	12°f - 7°dH		

Programas

Programs

Program options

Program table

3 programas automáticos; Programas de autolimpieza
 Aclarado extra; Ciclo de agua limpia
 Electronic Ecoline glasswasher 400

Máximo cesto / hora	40
Máximo platos / hora	320
Máximo copas / hora	1000

Conexión eléctrica

Enchufe	Schuko (F;E)	Wash pump power	290 W
Tank heating element power	1400 W	Conexión por defecto	3100 W
Boiler heating element power	2700 W		

Interface

Pantalla	4 dígitos	Botón ON/OFF	Sí
Número de botones	5	Diagnóstico manual	Sí

Construcción

Cuba	Produndidad del dibujo	Guías de estante	En relieve
Construcción de la cuba	Doble capa parcial	Bomba de desagüe	Sistema de filtrado de 4 etapas
Material de la cuba	Acero inoxidable AISI 304	Capacidad de la cuba	7 l
Panel trasero	Galvanizado	Volumen del calderín	4.5 l
Upper wash system	Un brazo rociador para lavado y un brazo rociador para aclarado, de acero inoxidable.	Ruido	Lpa 52,6 dBA
Lower wash system	Un brazo rociador para lavado y un brazo rociador combinado para enjuague, acero inoxidable y plástico.	Clase de protección	IPX4
Filtro de la cuba	Plástico	Adjustable feet	Sí
Junta de la puerta	Sólo arriba	Profundidad de carga	600 mm

Equipo accesorios incluidos

Cesta de cubiertos	PHOOS01	Tubería de suministro de agua	Si - 1,5m
Cesta plana	2x PB40G01	Tubo de desagüe	Si - 2m


Equipamiento

Bomba de desagüe	Sí	Option for auto daily switch on	Si, por defecto desactivado
Peristaltic detergent dispenser	Si, control electrónico	Contador de ciclos	Sí
Peristaltic rinse-aid dispenser	Si, control electrónico		
Dosificación de productos químicos	gr/lt		

Rinse boiler Thermostop system	Yes - default	Renovación parcial del agua en el tanque e incorporación bomba de drenaje	Sí
Wash tank Thermostop system	Sí		
Wash pump soft start system	Sí	Diámetro del tubo de entrada de agua	Si - 1,5m
		Diámetro del tubo de desagüe	Si - 2m
		Dosificador de detergente peristáltico	Si, manual
		Dosificador de detergente peristáltico	Si, manual

Datos logísticos

Ancho del producto empaquetado	510 mm	Dimensiones del producto embalado	860X510X630
Profundidad producto embalado	630 mm	Peso neto	37.000 kg
Altura del producto embalado	860 mm	Peso bruto (kg)	43.000

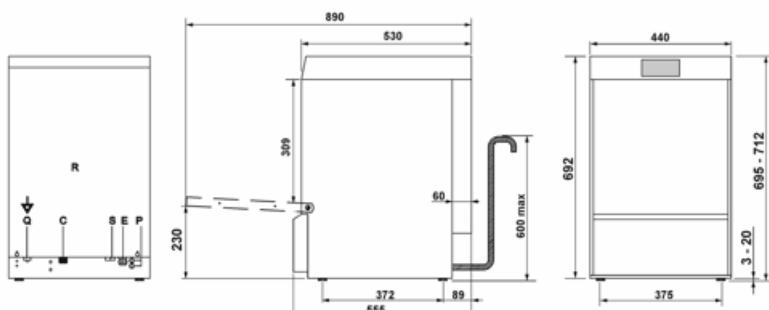

R	Pannello retro	Lower back panel
Q	Morsetto equipotenziale	Earth terminal
C	Tubo di carico	Filler hose
S	Tubo di scarico	Drain hose
P	Tubi pompa peristáltiche	Peristaltic hoses
E	Cavo alimentazione elettrica	Electricity supply cable

Accesories Compatible

KITRB40G01

Kit of 2 wire round baskets and adaptor
for Ecoline



PB40G01



PHOOS01



RB40A3

Adapter for round basket for all 400
glasswasher models 460 mm wide



WB40D01




WB40G02



WB40PG4

Wire basket for plastic glasses, dim.
(WxDxH) 400X400X210 mm



WS4

Estructura inferior para lavavasos 400,
495x530x490 mm



PB40C02

Universal flat bottom polypropylene
double basket, dim. (WxDxH)
400x400x227 mm



PHOOG4

Glass insert for 400x400 mm basket



PHOOS02



RB40G01



WB40G01



WB40G03



WH00S01



Symbols glossary



4 STAND FILTER



MAX.USABLE HEIGHT 309mm
309mm

Benefit (TT)

Interface

Control panel with electronic buttons

The electronic control panel features an intuitive interface with soft-touch buttons, allowing easy selection of one of the three wash programmes: short, medium, or intensive. There are also buttons for power, selection, and cycle start. The display provides real-time monitoring of the tank and boiler temperature, as well as diagnostics, ensuring effortless and immediate control of the main functions.

4-stage filtration system

Deep cleaning and spotless washes with the Patented 4-Stages Filtration System

The innovative Smeg filtration system consists of 4 stages to completely eliminate all impurities: the 1st stage captures larger food residues; in the 2nd stages, finer particles are captured at this filtration stage; the 3rd stage features a pre-filtration grid to prevent debris from entering the tank and clouding the water. Finally, the last stage is designed to further protect the washing and draining pumps from any debris that may accidentally enter the tank during filter cleaning.

Moulded tank

Superior washing performance and enhanced cleaning convenience with molded tub bottoms and basket guides

Smeg dishwashers are designed with moulded tank and basket guides. The absence of sharp edges ensures an optimised wash flow, guaranteeing hygiene and impeccable cleaning performance. Furthermore, this innovative design simplifies machine cleaning, reducing the need for maintenance interventions.

Partial double-skin

Optimised thermal and acoustic insulation

The Ecoline undercounter dishwashers are equipped with a partial double-skin structure that optimises energy efficiency by minimising heat loss. Additionally, it provides effective acoustic insulation, helping to reduce noise levels and ensuring a quieter, more comfortable working environment for staff.

Drain pump

Partial water replacement during the wash cycle for clean and hygienic dishes

The standard drain pump, equipped with a partial water exchange system, ensures that the dirtiest water is automatically removed at every wash cycle. This mechanism allows for continuous renewal of the water used, ensuring that each phase of the washing process is carried out with clean water. The result is optimal dishwashing performance, with outstanding efficiency and an impeccable level of hygiene.

Soft-start system

Effective management of the washing pump to protect your glassware

The Soft-Start function initiates the wash cycle gently and gradually, progressively increasing the water pressure. This system has been designed to provide optimal protection for the most fragile items, such as crystal glasses, significantly reducing the risk of chipping or damage. At the same time, it ensures excellent cleaning performance, combining efficiency and safety in every wash cycle.