

# SPG415

<b>Família</b>	Máquina de lavar louça profissional
<b>Subfamília</b>	Sob bancada
<b>Tipo</b>	Undercounter glasswashers
<b>Louça</b>	Louça; Copos; Talheres
<b>Dimensões do cesto</b>	400x400 mm
<b>Painel de comandos</b>	Controlo eletrónico da temperatura
<b>Bomba de enxaguamento</b>	HTR system
<b>Bomba de lavagem</b>	Standard
<b>Ligação energética</b>	400 V 3N~ / 10 A / 5,2 kW / 50 Hz
<b>Dimensões do produto (LxPxA)</b>	460x600x705 mm
<b>Renovação parcial da água na cuba e bomba de drenagem integrada</b>	Sim



## Mercado

<b>Indústrias</b>	Bares, Cafés e Pubs; Restaurantes / Catering
-------------------	---

## Design

<b>Cor dos LEDs</b>	Verde	<b>Design</b>	Easyline
---------------------	-------	---------------	----------

## Especificações técnicas

<b>Consumo de água por ciclo</b>	2,3 l	<b>Pressão de entrada</b>	100-1000 kPa (min-max)
<b>Temperatura de lavagem (mín.-máx)</b>	60 °C	<b>Carga de detergente</b>	1,5 l/h
<b>Temperatura de enxaguamento (mín.-máx.)</b>	71 °C - 83 °C	<b>Carga de enxaguamento</b>	0,4 l/h
<b>Temperatura de enxaguamento a frio</b>	No	<b>Altura de carga operável</b>	315 mm
<b>Temperatura pré-definida de ligação da água</b>	5°C	<b>Profundidade com porta aberta</b>	930 mm
<b>Consumo mínimo de água por ciclo</b>	2,3 l	<b>Diâmetro máximo dos pratos</b>	300 mm
<b>Temperatura máxima de entrada:</b>	60°C	<b>Diâmetro máximo dos copos</b>	300 mm
<b>Dureza máxima da água</b>	5°f - 3°dH		

## Programas

<b>Programas</b>	6 programas automáticos; 1 fully customizable program; Programas de autolimpeza; Cold water rinse program
<b>Opções do programa</b>	Enxaguamento extra; Ciclo da água limpa
<b>Tabela de programas</b>	Easyline glasswasher 400
<b>Numero máximo de cestos/hora</b>	60
<b>Numero máximo de pratos/hora</b>	480
<b>Numero máximo de copos/hora</b>	1500

## Ligação eléctrica

<b>Potência do elemento de aquecimento do tanque</b>	2000 W	<b>Ligação pré-definida</b>	5200 W
<b>Potência do elemento de aquecimento da caldeira</b>	4300 W	<b>Ligação eléctrica opcional</b>	230 V~ / 11 A / 2,5 kW / 50 Hz; 230 V 3~ / 15 A / 4,6 kW / 50 Hz; 230 V 3~ / 15 A / 5,2 kW / 50 Hz; 230 V~ / 14 A / 3,1 kW / 50 Hz; 230 V~ / 14 A / 3.2 kW / 50 Hz; 230 V~ / 17 A / 3.8 kW / 50 Hz
<b>Potência da bomba de lavagem</b>	300 W	<b>Ficha eléctrica</b>	Não

## Interface

<b>Display</b>	8 dígitos	<b>Alerta de falta de detergente</b>	Sim
<b>Numero de botões</b>	5	<b>Indicador da fase do programa</b>	Sim
<b>Luz indicadora On/Off</b>	Sim	<b>Indicador de fim do programa</b>	Sim
<b>Alerta de falta de abrillantador</b>	Sim	<b>Diagnóstico manual</b>	Sim

## ESPECIFICAÇÕES TÉCNICAS

<b>Cuba</b>	Profundo	<b>Guias dos cestos</b>	Embutidas
<b>Tipologia</b>	Parede dupla	<b>Filtro</b>	Sistema de filtragem de 5 estágios
<b>Material da cuba</b>	Aço inox AISI 304	<b>Capacidade da cuba</b>	7 l
<b>Painel traseiro</b>	St/steel	<b>Capacidade da caldeira</b>	4 l
<b>Porta equilibrada</b>	Sim	<b>Tipo de caldeira</b>	Atmosferic boiler
<b>Sistema de lavagem superior</b>	Um braço de lavagem e um braço de enxaguamento dividido, em aço inoxidável.	<b>Ruído</b>	Lpa 55 dBA
<b>Sistema de lavagem inferior</b>	One wash and one split rinse spray arms, stainless steel	<b>Classe de Proteção</b>	IPX4
<b>Filtro da cuba</b>	Aço inox	<b>Pés ajustáveis</b>	Sim
<b>Junta da porta</b>	Em 3 lados	<b>Altura max. de drenagem</b>	600 mm

## Acessórios incluídos


Cesto para copos	1x WB40G02	Mangueira de abastecimento de água	Sim - 1,5m
Cesto para talheres	1x PHOOS01	Mangueira de drenagem	Sim - 2m
Cesto de fundo plano	1x WB40G01		

## Equipamentos

Dispensador peristáltico de detergente	Controlo eletrónico	Opção para ativação automática diária	Sim, desligado por definição
Dispensador peristáltico de abrilhantador	Controlo eletrónico	Contador de ciclos	Sim
Sonda de nível químico	Sim, opcional KITSONLIV	Tanque de Ruptura	Sim
Sistema Thermostop para caldeira de enxaguamento	Yes - default	Diâmetro do tudo de abastecimento de água	DN10 - 3/8"
Sistema Thermostop no tanque de lavagem	Sim	Ø do tubo de drenagem	DN20-G 3/4"
Sistema de arranque suave da bomba de lavagem	Sim	Comprimento da mangueira de detergente (vermelha)	2,2 m
Sistema Stand-by	Sim	Comprimento da mangueira de enxaguamento (azul)	2,2 m

## Dados de logística

Código EAN	8017709326524	Peso líquido (kg)	46,000 kg
Dimensões do produto embalado (LxPxA)	850x515x710 mm	Peso bruto (kg)	52,000 kg

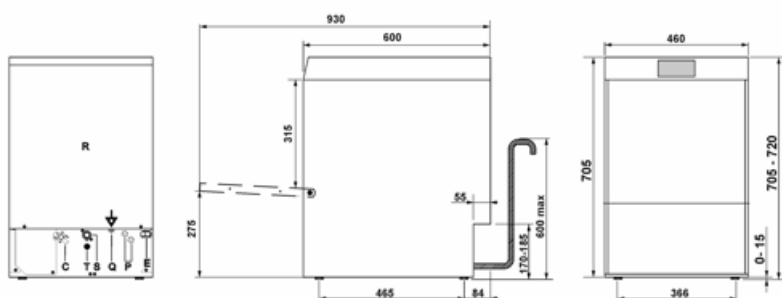

R	PANNELLO RETRO LOWER BACK PANEL
Q	MORSETTO EQUIPOTENZIALE EARTH TERMINAL
P	TUBI POMPE PERISTALTICHE PERISTALTIC HOSES
E	CAVO ALIMENTAZIONE ELETTRICA ELECTRICITY SUPPLY CABLE
S	TUBO DI SCARICO DRAIN HOSE
T	ENTRATA CAVO DI ALIMENTAZIONE DOSATORE ESTERNO EXTERNAL DISPENSER POWER CABLE ENTRY POINT
C	TUBO DI CARICO FILLER HOSE

## Acessórios Compatíveis



### KITDETKCC400

Kit for detergent (1l) and rinse aid (1l) storage for undercounter 400 double wall models



### PB40C02

Universal flat bottom polypropylene double basket, 20 small dishes upper basket, internal height lower basket 120 mm, dim.(WxDxH) 400x400x227 mm



### PHOOS01

Polypropylene single basket for cutlery



### RB40G01

Universal wire basket with flat bottom, dim. (ØxH) 400x140 mm



### WB40G01

Universal wire basket with flat bottom, internal height 110 mm, dim (WxDxH) 400x400x120 mm



### WB40G03

Sloped bottom 3 compartments wire basket for 9 glasses Ø110 mm max, dim. (WxDxH) 400x400x168 mm



### WH00S01

Wire insert for 17 small dishes, width 100 mm, for flat bottom baskets 500x500 and 600x500 mm



### KITSONLIV

Probe level kit



### PHOGR4

Tilted glass holder insert, configurable with up to 4 units of 4 glasses each, for PB40G01 basket 400x400 mm



### RB40A3

Adapter for round basket RB40G01 for 400 glasswashers models, width 440 and 460 mm



### WB40D01

Wire basket for 8 dishes Ø315 mm max, dim. (WxD) 400x400 mm



### WB40G02

Wire basket with sloped bottom for glasses 16 Ø90 mm max, dim. (WxDxH) 400x400x168 mm



### WB40PG4

Wire basket for 16 plastic glasses, max. H 180 mm, min.-max. Ø 36-95 mm, dim. (WxDxH) 400x400x210 mm



### WS4

Estrutura inferior para máquina de lavar copos 400

## Benefit (TT)

---

### Balanced door

Effortless opening and closing

The counterbalanced door is designed to ensure smooth and effortless opening and closing, providing high user convenience. Additionally, it can be locked in a halfway position, a particularly useful feature for promoting natural drying at the end of the workday, enhancing overall hygiene and preventing the buildup of residual moisture.

### 5-stage system

Deep cleaning and spotless washes with the patented filtration system

The innovative Smeg filtration system consists of 5 stages to completely eliminate all impurities: the 1st stage captures larger food residues; in the 2nd and 3rd stages, finer particles are captured at this filtration stage; the 4th stage features a pre-filtration grid to prevent debris from entering the tank and clouding the water. Finally, the last stage is designed to further protect the washing and draining pumps from any debris that may accidentally enter the tank during filter cleaning.

### HTR System

Consistent temperatures and pressures for uniform and effective dishwashing

Thanks to the HTR system (High Temperature Rinse) and the presence of the atmospheric boiler combined with the Thermostop, the cold inlet water does not enter the boiler during rinsing, ensuring a constant rinsing temperature according to the program setting. The HTR system keeps the water hot for deep sanitisation and quick drying, ensuring constant pressure for uniform and effective cleaning.

### Moulded tank

Superior washing performance and enhanced cleaning convenience with molded tub bottoms and basket guides

Smeg dishwashers are designed with moulded tank and basket guides. The absence of sharp edges ensures an optimised wash flow, guaranteeing hygiene and impeccable cleaning performance. Furthermore, this innovative design simplifies machine cleaning, reducing the need for maintenance interventions.

### Integral double-skin

Thermal and acoustic insulation guaranteed

The double-skin design of undercounter dishwashers is engineered to optimise energy efficiency by minimising heat loss and accelerating water heating, resulting in lower energy consumption and faster start-up times. Additionally, it provides effective sound insulation, helping to reduce noise levels and ensuring a quieter, more comfortable working environment for staff.

### Drain pump

Partial water replacement during the wash cycle for clean and hygienic dishes

The standard drain pump, equipped with a partial water exchange system, ensures that the dirtiest water is automatically removed at every wash cycle. This mechanism allows for continuous renewal of the water used, ensuring that each phase of the washing process is carried out with clean water. The result is optimal dishwashing performance, with outstanding efficiency and an impeccable level of hygiene.

### Soft-start system

Effective management of the washing pump to protect your glassware

The Soft-Start function initiates the wash cycle gently and gradually, progressively increasing the water pressure. This system has been designed to provide optimal protection for the most fragile items, such as crystal glasses, significantly reducing the risk of chipping or damage. At the same time, it ensures excellent cleaning performance, combining efficiency and safety in every wash cycle.