

# SPG415S

<b>Family</b>	Professional dishwasher
<b>Subfamily</b>	Undercounter
<b>Type</b>	Undercounter glasswashers
<b>Crockery</b>	Crockery; Glasses; Cutlery
<b>Basket dimensions</b>	400x400 mm
<b>Control panel</b>	Electronic
<b>Rinse pump</b>	HTR system
<b>Wash pump</b>	Standard
<b>Power connection</b>	400 V 3N~ / 10 A / 5,2 kW / 50 Hz
<b>Product dimensions (WxDxH)</b>	460x600x705 mm
<b>Partial renewal of water in the tank and built-in drain pump</b>	Yes



## Target

<b>Industries</b>	Bar / Cafeterias / Bistros / Wine bars / Pubs; Restaurants
-------------------	--

## Aesthetics

<b>Led color</b>	Green	<b>Series</b>	Easyline
------------------	-------	---------------	----------

## Technical Features

<b>Water consumption per cycle</b>	2,3 l	<b>Inlet pressure</b>	100-1000 kPa (min-max)
<b>Wash temperature (min-max)</b>	60 °C	<b>Detergent load</b>	1,5 l/h
<b>Rinse temperature (min-max)</b>	71 °C - 83 °C	<b>Rinse load</b>	0,4 l/h
<b>Min. water connection temperature</b>	5°C	<b>Usable load height</b>	315 mm
<b>Minimum water consumption per cycle</b>	2,3 l	<b>Depth with open door</b>	930 mm
<b>Max. inlet temperature</b>	60°C	<b>Maximum dishes diameter</b>	300 mm
<b>Max water hardness</b>	60°f - 34°dH	<b>Maximum glasses height</b>	300 mm

## Programs

<b>Programs</b>	6 automatic programs; 1 fully customizable program; Self-cleaning programs; Cold water rinse program
-----------------	--

<b>Program options</b>	Extra rinse; Clean water cycle
<b>Program table</b>	Easyline glasswasher 400
<b>Maximum basket/hour</b>	60
<b>Maximum dishes/hour</b>	480
<b>Maximum glasses/hour</b>	1500

## Electrical Connection

<b>Tank heating element power</b>	2000 W	<b>Default connection</b>	5200 W
<b>Boiler heating element power</b>	4300 W	<b>Optional electrical connection</b>	230 V~ / 11 A / 2,5 kW / 50 Hz; 230 V 3~ / 15 A / 4,6 kW / 50 Hz; 230 V 3~ / 15 A / 5,2 kW / 50 Hz; 230 V~ / 14 A / 3,1 kW / 50 Hz; 230 V~ / 14 A / 3.2 kW / 50 Hz; 230 V~ / 17 A / 3.8 kW / 50 Hz
<b>Wash pump power</b>	300 W	<b>Plug</b>	Not present

## Interface

<b>Display</b>	8 digit	<b>Detergent missing alert</b>	Yes
<b>Number of buttons</b>	5	<b>Cycle progress alert</b>	Yes
<b>On/Off button</b>	Yes	<b>End-cycle alert</b>	Yes
<b>Salt alert</b>	Yes	<b>Manual diagnostic</b>	Yes
<b>Rinse aid missing alert</b>	Yes		

## Construction

<b>Tank Construction</b>	Deep drawn Integral double-skin	<b>Rack guides</b>	Embossed
<b>Tank material</b>	Stainless steel AISI 304	<b>Filter</b>	5-stage filter system
<b>Back panel</b>	St/steel	<b>Tank capacity</b>	7 l
<b>Balanced door</b>	Yes	<b>Boiler capacity</b>	4 l
<b>Upper wash system</b>	One wash and one split rinse spray arms, stainless steel	<b>Boiler type</b>	Atmosferic boiler
<b>Lower wash system</b>	One wash and one split rinse spray arms, stainless steel	<b>Noise</b>	Lpa 55 dBA
<b>Tank filter</b>	Stainless steel	<b>Protection class</b>	IPX4
<b>Door gasket</b>	On 3 sides	<b>Adjustable feet</b>	Yes
		<b>Drain max. height</b>	600 mm

## Accessories included


<b>Glass basket</b>	1x WB40G02	<b>Water supply hose</b>	Yes - 1,5 m
<b>Cutlery basket</b>	1x PHOOS01	<b>Drain hose</b>	Yes - 2m
<b>Flat basket</b>	1x WB40G01		

## Equipments

Peristaltic detergent dispenser	Electronic control	Option for auto daily switch on	Yes, default OFF
Peristaltic rinse-aid dispenser	Electronic control	Cycle counter	Yes
Chemicals level probe	Yes, with optional kit KITSONLIV	Break tank	Yes
Automatic built softener	Yes	Water supply pipe diameter	DN10 - 3/8"
Rinse boiler Thermostop system	Yes - default	Drain supply pipe diameter	DN20-G 3/4"
Wash tank Thermostop system	Yes	Detergent (red) hose length	2,2 m
Wash pump soft start system	Yes	Rinse aid (blue) hose length	2,2 m
Stand-by system	Yes		

## Logistic Information

EAN code	8017709326234	Net weight	48,000 kg
Packed product dimensions (WxDxH)	850x515x710 mm	Gross weight	54,000 kg

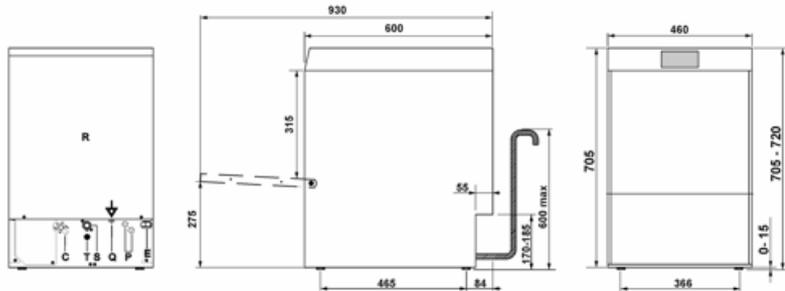

R	PANNELLO RETRO LOWER BACK PANEL
Q	MORSETTO EQUIPOTENZIALE EARTH TERMINAL
P	TUBI POMPE PERISTALTICHE PERISTALTIC HOSES
E	CAVO ALIMENTAZIONE ELETTRICA ELECTRICITY SUPPLY CABLE
S	TUBO DI SCARICO DRAIN HOSE
T	ENTRATA CAVO DI ALIMENTAZIONE DOSATORE ESTERNO EXTERNAL DISPENSER POWER CABLE ENTRY POINT
C	TUBO DI CARICO FILLER HOSE

## Compatible Accessories



### KITDETKCC400

Kit for detergent (1l) and rinse aid (1l) storage for undercounter 400 double wall models



### PB40C02

Universal flat bottom polypropylene double basket, 20 small dishes upper basket, internal height lower basket 120 mm, dim.(WxDxH) 400x400x227 mm



### PHOOS01

Polypropylene single basket for cutlery



### RB40G01

Universal wire basket with flat bottom, dim. (ØxH) 400x140 mm



### WB40G01

Universal wire basket with flat bottom, internal height 110 mm, dim (WxDxH) 400x400x120 mm



### WB40G03

Sloped bottom 3 compartments wire basket for 9 glasses Ø110 mm max, dim. (WxDxH) 400x400x168 mm



### WH00S01

Wire insert for 17 small dishes, width 100 mm, for flat bottom baskets 500x500 and 600x500 mm



### KITSONLIV

Probe level kit



### PHOGR4

Tilted glass holder insert, configurable with up to 4 units of 4 glasses each, for PB40G01 basket 400x400 mm



### RB40A3

Adapter for round basket RB40G01 for 400 glasswashers models, width 440 and 460 mm



### WB40D01

Wire basket for 8 dishes Ø315 mm max, dim. (WxD) 400x400 mm



### WB40G02

Wire basket with sloped bottom for glasses 16 Ø90 mm max, dim. (WxDxH) 400x400x168 mm



### WB40PG4

Wire basket for 16 plastic glasses, max. H 180 mm, min.-max. Ø 36-95 mm, dim. (WxDxH) 400x400x210 mm



### WS4

Stainless steel underframe for undercounter glasswashers 400 mm, dim. (WxDxH) 495x530x490 mm

## Benefit (TT)

---

### Balanced door

Effortless opening and closing

The counterbalanced door is designed to ensure smooth and effortless opening and closing, providing high user convenience. Additionally, it can be locked in a halfway position, a particularly useful feature for promoting natural drying at the end of the workday, enhancing overall hygiene and preventing the buildup of residual moisture.

### 5-stage system

Deep cleaning and spotless washes with the patented filtration system

The innovative Smeg filtration system consists of 5 stages to completely eliminate all impurities: the 1st stage captures larger food residues; in the 2nd and 3rd stages, finer particles are captured at this filtration stage; the 4th stage features a pre-filtration grid to prevent debris from entering the tank and clouding the water. Finally, the last stage is designed to further protect the washing and draining pumps from any debris that may accidentally enter the tank during filter cleaning.

### HTR System

Consistent temperatures and pressures for uniform and effective dishwashing

Thanks to the HTR system (High Temperature Rinse) and the presence of the atmospheric boiler combined with the Thermostop, the cold inlet water does not enter the boiler during rinsing, ensuring a constant rinsing temperature according to the program setting. The HTR system keeps the water hot for deep sanitisation and quick drying, ensuring constant pressure for uniform and effective cleaning.

### Moulded tank

Superior washing performance and enhanced cleaning convenience with molded tub bottoms and basket guides

Smeg dishwashers are designed with moulded tank and basket guides. The absence of sharp edges ensures an optimised wash flow, guaranteeing hygiene and impeccable cleaning performance. Furthermore, this innovative design simplifies machine cleaning, reducing the need for maintenance interventions.

### Integrated softener

Effective water treatment for consistently sparkling glasses

The integrated continuous regeneration water softener ensures effective water treatment, enhancing washing performance and preserving the machine's operational lifespan. The resin regeneration process takes place during the wash cycle without interruptions, providing constant control over water hardness. This system prevents limescale buildup, maximises detergent efficiency, and guarantees spotless results on glassware and dishes.

### Integral double-skin

Thermal and acoustic insulation guaranteed

The double-skin design of undercounter dishwashers is engineered to optimise energy efficiency by minimising heat loss and accelerating water heating, resulting in lower energy consumption and faster start-up times. Additionally, it provides effective sound insulation, helping to reduce noise levels and ensuring a quieter, more comfortable working environment for staff.

### **Drain pump**

Partial water replacement during the wash cycle for clean and hygienic dishes

The standard drain pump, equipped with a partial water exchange system, ensures that the dirtiest water is automatically removed at every wash cycle. This mechanism allows for continuous renewal of the water used, ensuring that each phase of the washing process is carried out with clean water. The result is optimal dishwashing performance, with outstanding efficiency and an impeccable level of hygiene.

### **Soft-start system**

Effective management of the washing pump to protect your glassware

The Soft-Start function initiates the wash cycle gently and gradually, progressively increasing the water pressure. This system has been designed to provide optimal protection for the most fragile items, such as crystal glasses, significantly reducing the risk of chipping or damage. At the same time, it ensures excellent cleaning performance, combining efficiency and safety in every wash cycle.