

SPG425

Familia	Lavavajillas
Subfamilia	Undercounter glasswashers
Line	Pura
Dimensiones de la cesta	400x400 mm
Rinse pump	Self-Adaptive HTR+
Wash pump	Standard



Equipo accesorios incluidos

Cesta para copas	WB40G02	Tubería de suministro de agua	Si - 1,5m
Cesta de cubiertos	PHOOS01	Tubo de desagüe	Si - 2m
Cesta plana	WB40G01		

Distribución

Usuarios potenciales	Cafeterías - Vinotecas; Restaurantes - Pubs
-----------------------------	--

Programas

Programs	10 programas personalizables; Programas de autolimpieza
Program options	Aclarado extra; Ciclo de agua limpia
Program table	Pura glasswasher 400
Program visibility	Sí
Máximo cesto / hora	45
Máximo platos / hora	360
Máximo copas / hora	1125

Interface

Pantalla	TFT	Alerta falta de detergente	Sí
Número de botones	5		
Botón ON/OFF	Sí		

Alerta de falta de abrillantador	Sí	Alerta de progreso del ciclo	Sí
		Alerta de fin de ciclo	Sí
		Diagnóstico manual	Sí

Construcción

Cuba	Produndidad del dibujo	Bomba de desagüe	Sí
Construcción de la cuba	Pared Doble	Filter presence sensor	Sí
Material de la cuba	Acero inoxidable AISI 304	Capacidad de la cuba	7 l
Panel trasero	Galvanizado	Volumen del calderín	4 l
Puerta equilibrada	Sí	Ruido	Lpa 56 dBA
Upper wash system	Un brazo rociador para lavado y un brazo rociador para aclarado, de acero inoxidable.	Puerto USB	Sí
Lower wash system	Un brazo rociador para lavado y un brazo rociador dividido para aclarado, de acero inoxidable.	Clase de protección	IPX4
Filtro de la cuba	Acero inoxidable	Adjustable feet	Sí
Junta de la puerta	En 3 lados	Profundidad de carga	600 mm
Guías de estante	En relieve		

Características técnicas


Tank heating element power	2000 W	Max. inlet temperature	60°C
Boiler heating element power	4300 W	Dureza máxima del agua	12°f - 7°dH
Wash pump power	300 W	Entrada de agua	100-1000 kPa (min-max)
Conexión por defecto	6600 W	Dosificador de detergente peristáltico	Si, manual
Water consumption per cycle	2 l	Dosificador de detergente peristáltico	Si, manual
Wash temperature (min-max)	60 °C - 70 °C	Altura útil de carga	315 mm
Rinse temperature (min-max)	65 °C - 85 °C	Profundidad puerta abierta	930 mm
Cold rinse temperature	24 °C	Diámetro máximo de platos	300 mm
Minimum water consumption per cycle	1,8 l	Altura máxima de copas	300 mm
Entrada de agua	5°C	Product dimensions WxDxH	460x600x705 mm

Conexión eléctrica

Conexión eléctrica	400 V 3N~ / 15 A / 6,6 kW / 50 Hz	Opción de conexión eléctrica	230 V 3~ / 20 A / 6,6 kW / 50 Hz; 230 V~ / 11 A / 2,45 kW / 50 Hz; 230 V~ / 14 A / 3,2 kW / 50 Hz; 230 V~ / 29 A / 6,6 kW / 50 Hz
---------------------------	-----------------------------------	-------------------------------------	---

Equipamiento

Bomba de desagüe	Sí	Option for auto daily switch on	Si, por defecto desactivado
Peristaltic detergent dispenser	Si, control electrónico	Tanque de rotura	Sí
Peristaltic rinse-aid dispenser	Si, control electrónico	Renovación parcial del agua en el tanque e incorporación bomba de drenaje	Sí
Nivel de productos químicos	Si, opcional KITSONLIV	Diámetro del tubo de entrada de agua	DN10 - 3/8"
Rinse boiler Thermostop system	Yes - default	Diámetro del tubo de desagüe	Si - 2m
Wash tank Thermostop system	Sí	Dosificador de detergente peristáltico	Si, manual
Wash pump soft start system	Sí	Dosificador de detergente peristáltico	Si, manual
Stand-by system	Sí		

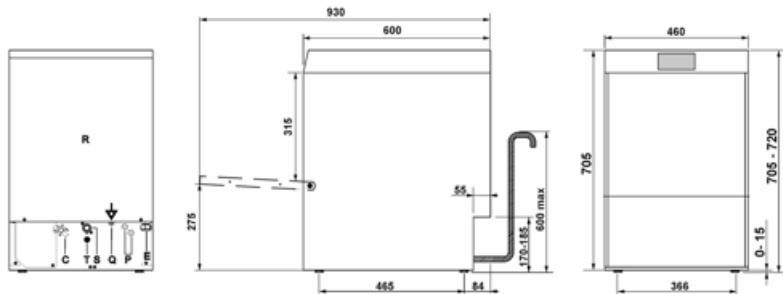

Accesories Compatible

KITDETCCC400



Kit for detergent (1l) and rinse aid (1l) storage for double wall models

KITSONLIV



Chemical level sensor probe kit for undercounter double wall models and hoodtype models

PB40C02



Universal flat bottom polypropylene double basket, dim. (WxDxH) 400x400x227 mm



PHOOGR4

Glass insert for 400x400 mm basket

PHOOS01



PHOOS02

RB40A3



Adapter for round basket for all glasswasher models 460 mm wide



RB40G01



WB40D01



WB40G01



WB40G02



WB40G03



WB40PG4



WH00S01

Wire basket for plastic glasses, dim. (WxDxH) 400X400X210 mm



WS4

Estructura inferior para lavavasos 400, 495x530x490 mm

Symbols glossary



HTR RINSING SYSTEM



5 STAGE FILTER



Max usable height 315mm



Professional appliance with Wi-fi connectivity and remote control via Remote SmegConnectPro App.



Electrodoméstico dotado de conexión a la red Wi-Fi

Benefit (TT)

Balanced door

Effortless opening and closing

The counterbalanced door is designed to ensure smooth and effortless opening and closing, providing high user convenience. Additionally, it can be locked in a halfway position, a particularly useful feature for promoting natural drying at the end of the workday, enhancing overall hygiene and preventing the buildup of residual moisture.

5-stage system

Deep cleaning and spotless washes with the patented filtration system

The innovative Smeg filtration system consists of 5 stages to completely eliminate all impurities: the 1st stage captures larger food residues; in the 2nd and 3rd stages, finer particles are captured at this filtration stage; the 4th stage features a pre-filtration grid to prevent debris from entering the tank and clouding the water. Finally, the last stage is designed to further protect the washing and draining pumps from any debris that may accidentally enter the tank during filter cleaning.

The presence sensor filter alerts if the filtration system is out of position, ensuring safe washes every time.

HTR+ System

Self-adaptive rinsing system for intelligent water management

The self-Adaptive HTR+ System monitors and adjusts the rinse volume with each wash cycle. The intelligent rinse management ensures the perfect amount of water and heat on the dishes, delivering consistent, reliable results, cycle after cycle.

Moulded tank

Superior washing performance and enhanced cleaning convenience with molded tub bottoms and basket guides

Smeg dishwashers are designed with moulded tank and basket guides. The absence of sharp edges ensures an optimised wash flow, guaranteeing hygiene and impeccable cleaning performance. Furthermore, this innovative design simplifies machine cleaning, reducing the need for maintenance interventions.

Integral double-skin

Thermal and acoustic insulation guaranteed

The double-skin design of undercounter dishwashers is engineered to optimise energy efficiency by minimising heat loss and accelerating water heating, resulting in lower energy consumption and faster start-up times. Additionally, it provides effective sound insulation, helping to reduce noise levels and ensuring a quieter, more comfortable working environment for staff.

Drain pump

Partial water replacement during the wash cycle for clean and hygienic dishes

The standard drain pump, equipped with a partial water exchange system, ensures that the dirtiest water is automatically removed at every wash cycle. This mechanism allows for continuous renewal of the water used, ensuring that each phase of the washing process is carried out with clean water. The result is optimal dishwashing performance, with outstanding efficiency and an impeccable level of hygiene.

Soft-start system

Effective management of the washing pump to protect your glassware

The Soft-Start function initiates the wash cycle gently and gradually, progressively increasing the water pressure. This system has been designed to provide optimal protection for the most fragile items, such as crystal glasses, significantly reducing the risk of chipping or damage. At the same time, it ensures excellent cleaning performance, combining efficiency and safety in every wash cycle.

Mi Lavado Personal

10 programas personalizables para satisfacer todas las necesidades de lavado

Cada modelo de la gama PURA ofrece 10 programas probados, asegurando soluciones listas para cualquier necesidad de lavado. Con la función MyPersonal Wash, se pueden personalizar parámetros como el tiempo, la temperatura, la presión y las opciones de lavado, optimizando los ciclos para vajilla delicada o suciedad resistente. El resultado es un lavado a medida, siempre impecable.

Program visibility

Program selection displayed for simplified dishwasher management

Users can select the programs to be displayed, hiding those that are unnecessary or unused. This feature not only helps prevent improper use of the appliance but also represents a significant step towards fully customising the user experience.