

SPG4250

Familia	Lavavajillas
Subfamilia	Undercounter glasswashers
Dimensiones de la cesta	400x400 mm
Rinse pump	Self-Adaptive HTR+
Wash pump	Standard
Integrated osmosis system	Sí
Conexión eléctrica	400 V 3N~ / 15 A / 6,6 kW / 50 Hz



Distribución

Usuarios potenciales	Cafeterías - Vinotecas; Restaurantes - Pubs
-----------------------------	--

Estética

Serie	Pura	Color Led	Blanco
--------------	------	------------------	--------

Características técnicas

Water consumption per cycle	2 l	Entrada de agua	150-1000 kPa (min-max)
Wash temperature (min-max)	60 °C - 70 °C	Dosificador de detergente peristáltico	Si, manual
Rinse temperature (min-max)	65 °C - 85 °C	Dosificador de detergente peristáltico	Si, manual
Cold rinse temperature	24 °C	Altura útil de carga	315 mm
Minimum water consumption per cycle	1,8 l	Profundidad puerta abierta	930 mm
Entrada de agua	5°C	Diámetro máximo de platos	300 mm
Max. inlet temperature	35°C	Altura máxima de copas	300 mm
Dureza máxima del agua	20°f - 11°dH	Product dimensions WxDxH	460x600x825 mm

Programas

Programs	10 programas personalizables; Programas de autolimpieza
Program options	Aclarado extra; Ciclo de agua limpia
Program table	Pura glasswasher 400
Program visibility	Sí
Máximo cesto / hora	45
Máximo platos / hora	360
Máximo copas / hora	1125

Connectivity

 		
SmegConnect Pro Connectivity	Sí Wi-Fi	PST certificate support period [UK]
		UK PSTI support period end date 2028-04-09

Conexión eléctrica

Tank heating element power	2000 W	Conexión por defecto	6600 W
Boiler heating element power	4300 W	Opción de conexión eléctrica	230 V 3~/20 A / 6,6 kW / 50 Hz; 230 V~/11 A / 2,45 kW / 50 Hz; 230 V~/14 A / 3,2 kW / 50 Hz; 230 V~/29 A / 6,6 kW / 50 Hz
Wash pump power	300 W		

Interface

Pantalla	TFT	Alerta falta de detergente	Sí
Número de botones	5	Alerta de progreso del ciclo	Sí
Botón ON/OFF	Sí	Alerta de fin de ciclo	Sí
Alerta de falta de abrillantador	Sí	Diagnóstico manual	Sí

Construcción

Cuba	Produndidad del dibujo	Bomba de desagüe	Sí
Construcción de la cuba	Pared Doble	Filter presence sensor	Sí
Material de la cuba	Acero inoxidable AISI 304	Capacidad de la cuba	7 l
Panel trasero	Galvanizado	Volumen del calderín	4 l
Puerta equilibrada	Sí	Ruido	Lpa 55 dBA
Upper wash system	Un brazo rociador para lavado y un brazo rociador para aclarado, de acero inoxidable.	Puerto USB	Sí
		Clase de protección	IPX4
		Adjustable feet	Sí
		Profundidad de carga	600 mm

Lower wash system	Un brazo rociador para lavado y un brazo rociador dividido para aclarado, de acero inoxidable.
Filtro de la cuba	Acero inoxidable
Junta de la puerta	En 3 lados
Guías de estante	En relieve

Equipo accesorios incluidos


Cesta para copas	WB40G02	Tubería de suministro de agua	Si - 1,5m
Cesta de cubiertos	PHOOS01	Tubo de desagüe	Si - 2m
Cesta plana	WB40G01		

Equipamiento

Bomba de desagüe	Sí	Option for auto daily switch on	Si, por defecto desactivado
Peristaltic detergent dispenser	Si, control electrónico	Contador de ciclos	Sí
Peristaltic rinse-aid dispenser	Si, control electrónico	Tanque de rotura	Sí
Nivel de productos químicos	Si, opcional KITSONLIV	Renovación parcial del agua en el tanque e incorporación bomba de drenaje	Sí
Rinse boiler Thermostop system	Yes - default	Diámetro del tubo de entrada de agua	DN10 - 3/8"
Wash tank Thermostop system	Sí	Diámetro del tubo de desagüe	Si - 2m
Wash pump soft start system	Sí	Dosificador de detergente peristáltico	Si, manual
Stand-by system	Sí	Dosificador de detergente peristáltico	Si, manual

Datos logísticos

Ancho del producto empaquetado	515 mm	Dimensiones del producto embalado	850X515X710
Profundidad producto embalado	710 mm	Peso neto	46,000 kg
Altura del producto embalado	850 mm	Peso bruto (kg)	52,000

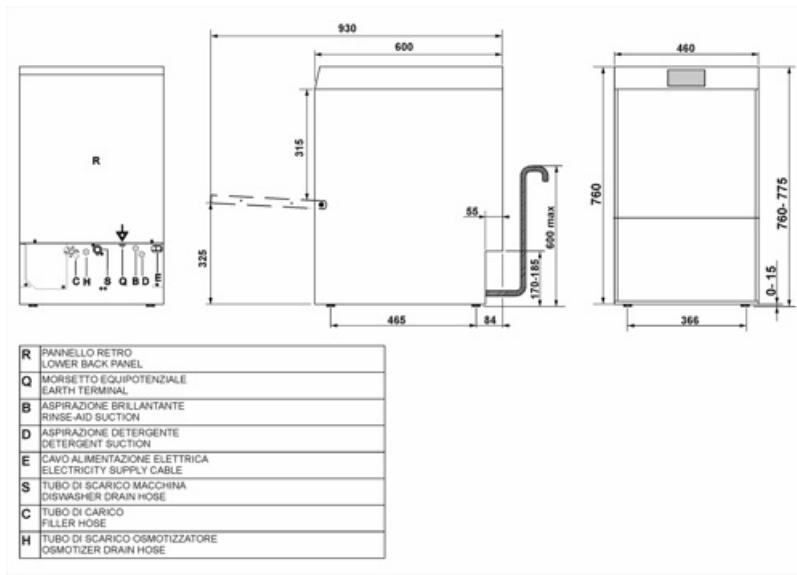

Accesories Compatible



PB40C02

Universal flat bottom polypropylene
double basket, dim. (WxDxH)
400x400x227 mm



PHOOGR4

Glass insert for 400x400 mm basket



WB40PG4

Wire basket for plastic glasses, dim.
(WxDxH) 400X400X210 mm

Symbols glossary



Electrodoméstico dotado de conexión a la red Wi-Fi



HTR RINSING SYSTEM



Max usable height 315mm



5 STAGE FILTER



Professional appliance with Wi-fi connectivity and remote control via Remote SmegConnectPro App.

Benefit (TT)

Balanced door

Effortless opening and closing

The counterbalanced door is designed to ensure smooth and effortless opening and closing, providing high user convenience. Additionally, it can be locked in a halfway position, a particularly useful feature for promoting natural drying at the end of the workday, enhancing overall hygiene and preventing the buildup of residual moisture.

5-stage system

Deep cleaning and spotless washes with the patented filtration system

The innovative Smeg filtration system consists of 5 stages to completely eliminate all impurities: the 1st stage captures larger food residues; in the 2nd and 3rd stages, finer particles are captured at this filtration stage; the 4th stage features a pre-filtration grid to prevent debris from entering the tank and clouding the water. Finally, the last stage is designed to further protect the washing and draining pumps from any debris that may accidentally enter the tank during filter cleaning.

The presence sensor filter alerts if the filtration system is out of position, ensuring safe washes every time.

HTR+ System

Self-adaptive rinsing system for intelligent water management

The self-Adaptive HTR+ System monitors and adjusts the rinse volume with each wash cycle. The intelligent rinse management ensures the perfect amount of water and heat on the dishes, delivering consistent, reliable results, cycle after cycle.

Moulded tank

Superior washing performance and enhanced cleaning convenience with molded tub bottoms and basket guides

Smeg dishwashers are designed with moulded tank and basket guides. The absence of sharp edges ensures an optimised wash flow, guaranteeing hygiene and impeccable cleaning performance. Furthermore, this innovative design simplifies machine cleaning, reducing the need for maintenance interventions.

Integral double-skin

Thermal and acoustic insulation guaranteed

The double-skin design of undercounter dishwashers is engineered to optimise energy efficiency by minimising heat loss and accelerating water heating, resulting in lower energy consumption and faster start-up times. Additionally, it provides effective sound insulation, helping to reduce noise levels and ensuring a quieter, more comfortable working environment for staff.

Drain pump

Partial water replacement during the wash cycle for clean and hygienic dishes

The standard drain pump, equipped with a partial water exchange system, ensures that the dirtiest water is automatically removed at every wash cycle. This mechanism allows for continuous renewal of the water used, ensuring that each phase of the washing process is carried out with clean water. The result is optimal dishwashing performance, with outstanding efficiency and an impeccable level of hygiene.

Soft-start system

Effective management of the washing pump to protect your glassware

The Soft-Start function initiates the wash cycle gently and gradually, progressively increasing the water pressure. This system has been designed to provide optimal protection for the most fragile items, such as crystal glasses, significantly reducing the risk of chipping or damage. At the same time, it ensures excellent cleaning performance, combining efficiency and safety in every wash cycle.

Mi Lavado Personal

10 programas personalizables para satisfacer todas las necesidades de lavado

Cada modelo de la gama PURA ofrece 10 programas probados, asegurando soluciones listas para cualquier necesidad de lavado. Con la función MyPersonal Wash, se pueden personalizar parámetros como el tiempo, la temperatura, la presión y las opciones de lavado, optimizando los ciclos para vajilla delicada o suciedad resistente. El resultado es un lavado a medida, siempre impecable.

Osmosis system

Glasses always sparkling, without streaks or water spots, straight from the machine

The integrated osmosis system ensures spotless, streak-free glasses, eliminating the need for manual drying. Osmosis water enhances detergent and rinse aid, preventing mineral residue buildup. Housed in a removable drawer, the system simplifies maintenance, allowing the appliance to operate even during extraction.

Program visibility

Program selection displayed for simplified dishwasher management

Users can select the programs to be displayed, hiding those that are unnecessary or unused. This feature not only helps prevent improper use of the appliance but also represents a significant step towards fully customising the user experience.