

# SPG425S

<b>Família</b>	Máquina de lavar louça profissional
<b>Subfamília</b>	Sob bancada
<b>Tipo</b>	Undercounter glasswashers
<b>Louça</b>	Louça; Copos; Talheres
<b>Dimensões do cesto</b>	400x400 mm
<b>Painel de comandos</b>	Ecrã Touch
<b>Standard drain pump with partial water renewal in the wash tank</b>	Sim
<b>Bomba de enxaguamento</b>	Self-Adaptive HTR+
<b>Tipo de caldeira</b>	Atmosferic boiler
<b>Bomba de lavagem</b>	Standard
<b>Ligação energética</b>	400 V 3N~ / 15 A / 6,6 kW / 50 Hz
<b>Dimensões do produto (LxPxA)</b>	460x600x705 mm



## Mercado

<b>Indústrias</b>	Bares, Cafés e Pubs; Hotelaria; Restaurantes / Catering; Padarias / Pastelarias; Indústrias Alimentares
-------------------	---

## Design

<b>Cor dos LEDs</b>	Branco	<b>Design</b>	Pura
---------------------	--------	---------------	------

## Especificações técnicas

<b>Consumo de água por ciclo</b>	2 l	<b>Pressão de entrada</b>	100-1000 kPa (min-max)
<b>Temperatura de lavagem (mín.-máx)</b>	60 °C - 70 °C	<b>Carga de detergente</b>	1,5 l/h
<b>Temperatura de enxaguamento (mín.-máx.)</b>	65 °C - 85 °C	<b>Carga de enxaguamento</b>	0,4 l/h
<b>Temperatura de enxaguamento a frio</b>	24 °C	<b>Altura de carga operável</b>	315 mm
<b>Temperatura pré-definida de ligação da água</b>	5°C	<b>Profundidade com porta aberta</b>	930 mm
<b>Consumo mínimo de água por ciclo</b>	1,8 l	<b>Diâmetro máximo dos pratos</b>	300 mm
<b>Temperatura máxima de entrada:</b>	60°C	<b>Diâmetro máximo dos copos</b>	300 mm

Dureza máxima da água 60°f - 34°dH

## Programas

Programas	10 programas personalizáveis; Programas de autolimpeza
Opções do programa	Enxaguamento extra; Ciclo da água limpa
Tabela de programas	Lava-copos Pura 400
Visibilidade do programa	Sim
Numero máximo de cestos/hora	60
Numero máximo de pratos/hora	480
Numero máximo de copos/hora	1500

## Conectividade

SmegConnect Pro	Sim	PST certificate support	24 months
Conectividade	Wi-Fi	period [UK]	
		Caducidade do período de assistência UK PSTI	2027-12-31

## Ligação elétrica

Potência do elemento de aquecimento do tanque	2000 W	Ligação pré-definida	6600 W
Potência do elemento de aquecimento da caldeira	4300 W	Ligação eléctrica opcional	230 V 3~ / 20 A / 6,6 kW / 50 Hz; 230 V~ / 11 A / 2,45 kW / 50 Hz; 230 V~ / 14 A / 3,2 kW / 50 Hz; 230 V~ / 29 A / 6,6 kW / 50 Hz
Potência da bomba de lavagem	300 W	Ficha eléctrica	Não

## Interface

Display	Display TFT	Alerta de falta de detergente	Sim
Numero de botões	5	Indicador da fase do programa	Sim
Luz indicadora On/Off	Sim	Indicador de fim do programa	Sim
Luz indicadora de falta de sal	Sim	Diagnóstico manual	Sim
Alerta de falta de abrillantador	Sim		

## ESPECIFICAÇÕES TÉCNICAS

Cuba	Profundo	Filtro	Sistema de filtragem de 5 estágios
Tipologia	Parede dupla	Sensor de presença de filtro	Sim
Material da cuba	Aço inox AISI 304	Capacidade da cuba	7 l
Painel traseiro	St/steel	Capacidade da caldeira	4 l
Porta equilibrada	Sim	Ruído	Lpa 55 dBA

<b>Sistema de lavagem superior</b>	Um braço de lavagem e um braço de enxaguamento dividido, em aço inoxidável.	<b>Porta USB</b>	Sim
<b>Sistema de lavagem inferior</b>	One wash and one split rinse spray arms, stainless steel	<b>Classe de Proteção</b>	IPX4
<b>Filtro da cuba</b>	Aço inox	<b>Pés ajustáveis</b>	Sim
<b>Junta da porta</b>	Em 3 lados	<b>Altura max. de drenagem</b>	600 mm
<b>Guias dos cestos</b>	Embutidas		

## Acessórios incluídos


<b>Cesto para copos</b>	1x WB40G02	<b>Mangueira de abastecimento de água</b>	Sim - 1,5m
<b>Cesto para talheres</b>	1x PHOOS01	<b>Mangueira de drenagem</b>	Sim - 2m
<b>Cesto de fundo plano</b>	1x WB40G01		

## Equipamentos

<b>Dispensador peristáltico de detergente</b>	Controlo eletrónico	<b>Sistema Stand-by</b>	Sim
<b>Dispensador peristáltico de abrillantador</b>	Controlo eletrónico	<b>Opção para ativação automática diária</b>	Sim, desligado por definição
<b>Sonda de nível químico</b>	Sim, opcional KITSONLIV	<b>Tanque de Ruptura</b>	Sim
<b>Amaciador automático incorporado</b>	Sim	<b>Diâmetro do tudo de abastecimento de água</b>	DN10 - 3/8"
<b>Sistema Thermostop para caldeira de enxaguamento</b>	Yes - default	<b>Ø do tubo de drenagem</b>	DN20-G 3/4"
<b>Sistema Thermostop no tanque de lavagem</b>	Sim	<b>Comprimento da mangueira de detergente (vermelha)</b>	2,2 m
<b>Sistema de arranque suave da bomba de lavagem</b>	Sim	<b>Comprimento da mangueira de enxaguamento (azul)</b>	2,2 m

## Dados de logística

<b>Código EAN</b>	8017709351960	<b>Peso líquido (kg)</b>	49,000 kg
<b>Dimensões do produto embalado (LxPxX)</b>	515x710x720 mm	<b>Peso bruto (kg)</b>	55,000 kg

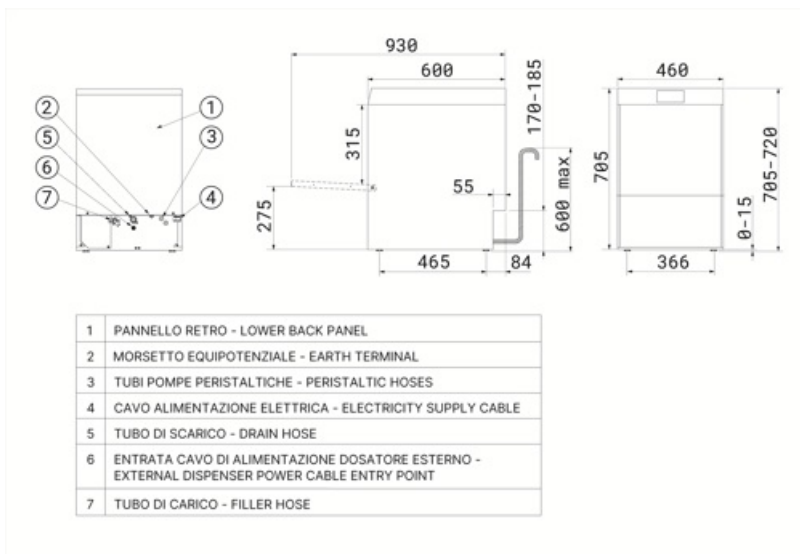

## Acessórios Compatíveis



### KITDETKCC400

Kit for detergent (1l) and rinse aid (1l) storage for undercounter 400 double wall models



### PB40C02

Universal flat bottom polypropylene double basket, 20 small dishes upper basket, internal height lower basket 120 mm, dim.(WxDxH) 400x400x227 mm



### PHOOS01

Polypropylene single basket for cutlery



### RB40G01

Universal wire basket with flat bottom, dim. (ØxH) 400x140 mm



### WB40G01

Universal wire basket with flat bottom, internal height 110 mm, dim (WxDxH) 400x400x120 mm



### WB40G03

Sloped bottom 3 compartments wire basket for 9 glasses Ø110 mm max, dim. (WxDxH) 400x400x168 mm



### WH00S01

Wire insert for 17 small dishes, width 100 mm, for flat bottom baskets 500x500 and 600x500 mm



### KITSONLIV

Probe level kit



### PHOGR4

Tilted glass holder insert, configurable with up to 4 units of 4 glasses each, for PB40G01 basket 400x400 mm



### RB40A3

Adapter for round basket RB40G01 for 400 glasswashers models, width 440 and 460 mm



### WB40D01

Wire basket for 8 dishes Ø315 mm max, dim. (WxD) 400x400 mm



### WB40G02

Wire basket with sloped bottom for glasses 16 Ø90 mm max, dim. (WxDxH) 400x400x168 mm



### WB40PG4

Wire basket for 16 plastic glasses, max. H 180 mm, min.-max. Ø 36-95 mm, dim. (WxDxH) 400x400x210 mm



### WS4

Estrutura inferior para máquina de lavar copos 400

## Benefit (TT)

---

### Balanced door

Effortless opening and closing

The counterbalanced door is designed to ensure smooth and effortless opening and closing, providing high user convenience. Additionally, it can be locked in a halfway position, a particularly useful feature for promoting natural drying at the end of the workday, enhancing overall hygiene and preventing the buildup of residual moisture.

### 5-stage system

Deep cleaning and spotless washes with the patented filtration system

The innovative Smeg filtration system consists of 5 stages to completely eliminate all impurities: the 1st stage captures larger food residues; in the 2nd and 3rd stages, finer particles are captured at this filtration stage; the 4th stage features a pre-filtration grid to prevent debris from entering the tank and clouding the water. Finally, the last stage is designed to further protect the washing and draining pumps from any debris that may accidentally enter the tank during filter cleaning.

### HTR+ System

Self-adaptive rinsing system for intelligent water management

The self-Adaptive HTR+ System monitors and adjusts the rinse volume with each wash cycle. The intelligent rinse management ensures the perfect amount of water and heat on the dishes, delivering consistent, reliable results, cycle after cycle.

### Moulded tank

Superior washing performance and enhanced cleaning convenience with molded tub bottoms and basket guides

Smeg dishwashers are designed with moulded tank and basket guides. The absence of sharp edges ensures an optimised wash flow, guaranteeing hygiene and impeccable cleaning performance. Furthermore, this innovative design simplifies machine cleaning, reducing the need for maintenance interventions.

### Integrated softener

Effective water treatment for consistently sparkling glasses

The integrated continuous regeneration water softener ensures effective water treatment, enhancing washing performance and preserving the machine's operational lifespan. The resin regeneration process takes place during the wash cycle without interruptions, providing constant control over water hardness. This system prevents limescale buildup, maximises detergent efficiency, and guarantees spotless results on glassware and dishes.

### Integral double-skin

Thermal and acoustic insulation guaranteed

The double-skin design of undercounter dishwashers is engineered to optimise energy efficiency by minimising heat loss and accelerating water heating, resulting in lower energy consumption and faster start-up times. Additionally, it provides effective sound insulation, helping to reduce noise levels and ensuring a quieter, more comfortable working environment for staff.

## **Drain pump**

Partial water replacement during the wash cycle for clean and hygienic dishes

The standard drain pump, equipped with a partial water exchange system, ensures that the dirtiest water is automatically removed at every wash cycle. This mechanism allows for continuous renewal of the water used, ensuring that each phase of the washing process is carried out with clean water. The result is optimal dishwashing performance, with outstanding efficiency and an impeccable level of hygiene.

## **Soft-start system**

Effective management of the washing pump to protect your glassware

The Soft-Start function initiates the wash cycle gently and gradually, progressively increasing the water pressure. This system has been designed to provide optimal protection for the most fragile items, such as crystal glasses, significantly reducing the risk of chipping or damage. At the same time, it ensures excellent cleaning performance, combining efficiency and safety in every wash cycle.

## **MyPersonal Wash**

10 pre-set washing programmes for a complete and ready-to-use solution

Each model in the PURA range offers 10 tested programmes, ensuring ready-to-use solutions for any washing requirement. With the MyPersonal Wash function, parameters such as time, temperature, pressure, and washing options can be customised, optimising cycles for delicate dishes or stubborn dirt. The result is a tailored wash, always flawless.

## **Program visibility**

Program selection displayed for simplified dishwasher management

Users can select the programs to be displayed, hiding those that are unnecessary or unused. This feature not only helps prevent improper use of the appliance but also represents a significant step towards fully customising the user experience.