

# SPG515L

Family	Professional dishwasher
Subfamily	Undercounter
Type	Undercounter dishwashers
Crockery	Crockery; Glasses; Cutlery
Basket dimensions	500x500 mm
Control panel	Electronic
Standard drain pump with partial water renewal in the wash tank	Yes
Rinse pump	HTR system
Boiler type	Atmosferic boiler
Wash pump	Standard
Power connection	400 V 3N~ / 12 A / 7,3 kW / 50 Hz
Product dimensions (WxDxH)	600x600x722 mm



## Target

Industries	Bar / Cafeterias / Bistros / Wine bars / Pubs; Hotels; Restaurants; Bakeries / Pastry shops; Commercial food services
------------	---

## Aesthetics

Led color	Green	Series	Easyline
-----------	-------	--------	----------

## Technical Features

Water consumption per cycle	3,2 l	Inlet pressure	100-1000 kPa (min-max)
Wash temperature (min-max)	60 °C	Detergent load	1,5 l/h
Rinse temperature (min-max)	71 °C - 85 °C	Rinse load	0,4 l/h
Min. water connection temperature	5°C	Usable load height	300 mm
Minimum water consumption per cycle	3,2 l	Depth with open door	925 mm
Max. inlet temperature	60°C	Maximum dishes diameter	300 mm
Max water hardness	5°f - 3°dH		

## Programs

<b>Programs</b>	6 automatic programs; 1 fully customizable program; Self-cleaning programs
<b>Program options</b>	Extra rinse; Clean water cycle
<b>Maximum basket/hour</b>	60
<b>Maximum dishes/hour</b>	1080
<b>Maximum glasses/hour</b>	2160

## Electrical Connection

<b>Tank heating element power</b>	2000 W	<b>Default connection</b>	7300 W
<b>Boiler heating element power</b>	6100 W	<b>Optional electrical connection</b>	230 V 3~ / 19 A / 7,3 kW / 50 Hz; 230 V 3~ / 19 A / 6,8 kW / 50 Hz; 230 V~ / 15 A / 3,4 kW / 50 Hz; 230 V~ / 17 A / 3.9 kW / 50 Hz; 230 V~ / 20 A / 4,5 kW / 50 Hz; 230 V~ / 22 A / 5,0 kW / 50 Hz; 400 V 3N~ / 12 A / 6,8 kW / 50 Hz
<b>Wash pump power</b>	700 W	<b>Plug</b>	Not present

## Interface

<b>Display</b>	8 digit	<b>Detergent missing alert</b>	Yes
<b>Number of buttons</b>	5	<b>Cycle progress alert</b>	Yes
<b>On/Off button</b>	Yes	<b>End-cycle alert</b>	Yes
<b>Rinse aid missing alert</b>	Yes	<b>Manual diagnostic</b>	Yes

## Construction

<b>Tank Construction</b>	Deep drawn Integral double-skin	<b>Rack guides</b>	Embossed
<b>Tank material</b>	Stainless steel AISI 304	<b>Hood elevation system</b>	Manual
<b>Back panel</b>	St/steel	<b>Filter</b>	5-stage filter system
<b>Balanced door</b>	Yes	<b>Tank capacity</b>	11 l
<b>Upper wash system</b>	One wash and one split rinse spray arms, stainless steel	<b>Boiler capacity</b>	6.5 l
<b>Lower wash system</b>	One wash and one split rinse spray arms, stainless steel	<b>Noise</b>	Lpa 54,5 dBA
<b>Tank filter</b>	Stainless steel	<b>Protection class</b>	IPX4
<b>Door gasket</b>	On 3 sides	<b>Adjustable feet</b>	Yes
		<b>Drain max. height</b>	600 mm

## Accessories included


<b>Flat basket</b>	1x WB50G02	<b>Drain hose</b>	Yes - 2m
<b>Water supply hose</b>	Yes - 1,5 m		

## Equipments

Peristaltic detergent dispenser	Electronic control	Option for auto daily switch on	Yes, default OFF
Peristaltic rinse-aid dispenser	Electronic control	Conductivity sensor	Si
Rinse boiler Thermostop system	Yes - default	Water supply pipe diameter	DN15 - ½"
Wash tank Thermostop system	Yes	Drain supply pipe diameter	DN20-G 3/4"
Wash pump soft start system	Yes	Detergent (red) hose length	2,2 m
Stand-by system	Yes	Rinse aid (blue) hose length	2,2 m

## Logistic Information

EAN code	8017709340865	Net weight	55.000 kg
Packed product dimensions (WxDxH)	890x660x700 mm	Gross weight	63.000 kg

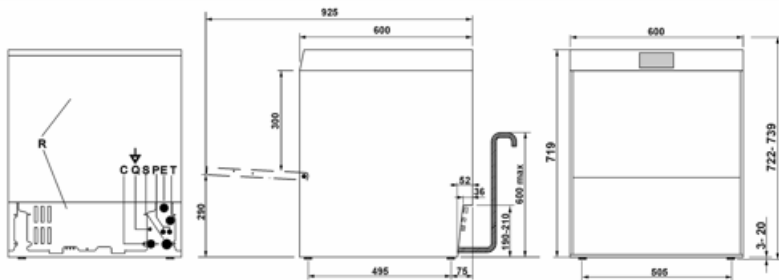


R	PANNELLO RETRO LOWER BACK PANEL
Q	MORSETTO EQUIPOTENZIALE EARTH TERMINAL
P	TUBI POMPE PERISTALTICHE PERISTALTIC HOSES
E	CAVO ALIMENTAZIONE ELETTRICA ELECTRICITY SUPPLY CABLE
S	TUBO DI SCARICO DRAIN HOSE
T	ENTRATA CAVO DI ALIMENTAZIONE DOSATORE ESTERNO EXTERNAL DISPENSER POWER CABLE ENTRY POINT
C	TUBO DI CARICO FILLER HOSE

## Compatible Accessories



**KITSONLIV**  
Probe level kit



**PB50D01**  
Polypropylene basket for 18 plates  
Ø250 mm max, dim.(WxDxH)  
500x500x105 mm



**PHOOS01**  
Polypropylene single basket for cutlery



**WB50PG5**  
Wire basket with flat bottom for 25  
plastic glasses, max. H 230 mm, min.-  
max. Ø 36-95 mm, dim. (WxDxH)  
500x500x260 mm



**WH00S01**  
Wire insert for 17 small dishes, width  
100 mm, for flat bottom baskets  
500x500 and 600x500 mm



**WS5**  
Stainless steel underframe for  
undercounter glasswashers and  
dishwashers 500 mm, dim. (WxDxH)  
595x595x490 mm

## Benefit (TT)

---

### Balanced door

Effortless opening and closing

The counterbalanced door is designed to ensure smooth and effortless opening and closing, providing high user convenience. Additionally, it can be locked in a halfway position, a particularly useful feature for promoting natural drying at the end of the workday, enhancing overall hygiene and preventing the buildup of residual moisture.

### 5-stage system

Deep cleaning and spotless washes with the patented filtration system

The innovative Smeg filtration system consists of 5 stages to completely eliminate all impurities: the 1st stage captures larger food residues; in the 2nd and 3rd stages, finer particles are captured at this filtration stage; the 4th stage features a pre-filtration grid to prevent debris from entering the tank and clouding the water. Finally, the last stage is designed to further protect the washing and draining pumps from any debris that may accidentally enter the tank during filter cleaning.

### HTR System

Consistent temperatures and pressures for uniform and effective dishwashing

Thanks to the HTR system (High Temperature Rinse) and the presence of the atmospheric boiler combined with the Thermostop, the cold inlet water does not enter the boiler during rinsing, ensuring a constant rinsing temperature according to the program setting. The HTR system keeps the water hot for deep sanitisation and quick drying, ensuring constant pressure for uniform and effective cleaning.

### Moulded tank

Superior washing performance and enhanced cleaning convenience with molded tub bottoms and basket guides

Smeg dishwashers are designed with moulded tank and basket guides. The absence of sharp edges ensures an optimised wash flow, guaranteeing hygiene and impeccable cleaning performance. Furthermore, this innovative design simplifies machine cleaning, reducing the need for maintenance interventions.

### Integral double-skin

Thermal and acoustic insulation guaranteed

The double-skin design of undercounter dishwashers is engineered to optimise energy efficiency by minimising heat loss and accelerating water heating, resulting in lower energy consumption and faster start-up times. Additionally, it provides effective sound insulation, helping to reduce noise levels and ensuring a quieter, more comfortable working environment for staff.

### Drain pump

Partial water replacement during the wash cycle for clean and hygienic dishes

The standard drain pump, equipped with a partial water exchange system, ensures that the dirtiest water is automatically removed at every wash cycle. This mechanism allows for continuous renewal of the water used, ensuring that each phase of the washing process is carried out with clean water. The result is optimal dishwashing performance, with outstanding efficiency and an impeccable level of hygiene.

### **Soft-start system**

Effective management of the washing pump to protect your glassware

The Soft-Start function initiates the wash cycle gently and gradually, progressively increasing the water pressure. This system has been designed to provide optimal protection for the most fragile items, such as crystal glasses, significantly reducing the risk of chipping or damage. At the same time, it ensures excellent cleaning performance, combining efficiency and safety in every wash cycle.

### **Hood lift**

Unprecedented comfort with the patented lifting system

The new ergonomic handle, combined with the patented lifting system, minimises the effort required to open and close the hood, limiting it to just 2.5 kg. This system ensures an exceptionally smooth and lightweight operation, helping to protect the operator's health and well-being, even during extended use.