

SPG525SL

| | |
|-----------------------------------|---------------------------------|
| Family | Professional dishwasher |
| Subfamily | Undercounter |
| Type | Undercounter glasswashers |
| Crockery | Crockery; Glasses; Cutlery |
| Basket dimensions | 500x500 mm |
| Control panel | Touch screen |
| Rinse pump | Self-Adaptive HTR+ |
| Wash pump | Variable speed AdaptWash |
| Power connection | 400 V 3N~/15 A / 8,4 kW / 50 Hz |
| Product dimensions (WxDxH) | 600x600x722 mm |



Target

| | |
|-------------------|---|
| Industries | Bar / Cafeterias / Bistros / Wine bars / Pubs; Hotels; Ristoranti / Catering; Bakeries / Pastry shops; Commercial food services |
|-------------------|---|

Aesthetics

| | | | |
|------------------|-------|---------------|------|
| Led color | White | Series | Pura |
|------------------|-------|---------------|------|

Technical Features

| | | | |
|--|---------------|--------------------------------|------------------------|
| Water consumption per cycle | 2,5 l | Inlet pressure | 100-1000 kPa (min-max) |
| Wash temperature (min-max) | 60 °C - 70 °C | Detergent load | 1,5 l/h |
| Rinse temperature (min-max) | 65 °C - 87 °C | Rinse load | 0,4 l/h |
| Cold rinse temperature | 24 °C | Usable load height | 300 mm |
| Min. water connection temperature | 5°C | Depth with open door | 925 mm |
| Minimum water consumption per cycle | 1,8 l | Maximum dishes diameter | 300 mm |
| Max. inlet temperature | 60°C | Maximum glasses height | 300 mm |
| Max water hardness | 54°f - 30°dH | | |

Programs

| | |
|-----------------------------|--|
| Programs | 10 customizable programs; Self-cleaning programs |
| Program options | Extra rinse; Clean water cycle |
| Program table | Pura glasswasher 500 |
| Program visibility | Yes |
| Maximum basket/hour | 45 |
| Maximum dishes/hour | 810 |
| Maximum glasses/hour | 1620 |

Connectivity



| | | | |
|-------------------------------------|--------------|--|------------|
| SmegConnect Pro Connectivity | Yes Wi-Fi | PST certificate support period [UK] | 24 months |
| | | UK PSTI support period end date | 2028-04-09 |

Electrical Connection

| | | | |
|-------------------------------------|--------|---------------------------------------|--|
| Tank heating element power | 2000 W | Default connection | 8400 W |
| Boiler heating element power | 5700 W | Optional electrical connection | 230 V 3~/19 A / 6,7 kW / 50 Hz; 230 V~/12 A / 2,7 kW / 50 Hz; 230 V~/16 A / 3,7 kW / 50 Hz; 230 V~/21 A / 4,7 kW / 50 Hz |
| Wash pump power | 700 W | Plug | Not present |

Interface

| | | | |
|--------------------------------|-----|--------------------------------|-----|
| Display | TFT | Detergent missing alert | Yes |
| On/Off button | Yes | Cycle progress alert | Yes |
| Salt alert | Yes | End-cycle alert | Yes |
| Rinse aid missing alert | Yes | Manual diagnostic | Yes |

Construction

| | | | |
|--------------------------|--|------------------------------|-----------------------|
| Tank | Deep drawn | Hood elevation system | Manual |
| Construction | Integral double-skin | Filter | 5-stage filter system |
| Tank material | Stainless steel AISI 304 | Tank capacity | 11 l |
| Back panel | Galvanized | Boiler capacity | 6,5 l |
| Balanced door | Yes | Boiler type | Artmosferic boiler |
| Upper wash system | One wash and one split rinse spray arms, stainless steel | Noise | Lpa 54,5 dBA |
| Lower wash system | One wash and one split rinse spray arms, stainless steel | USB port | Yes |
| Tank filter | Stainless steel | Protection class | IPX4 |
| Door gasket | On 3 sides | Adjustable feet | Yes |
| Rack guides | Embossed | Drain max. height | 1000 mm |

Accessories included


| | | | |
|-------------------|------------|------------|----------|
| Flat basket | 1x WB50G02 | Drain hose | Yes - 2m |
| Water supply hose | Yes - 2 m | | |

Equipments

| | | | |
|---------------------------------|----------------------------------|--|------------------|
| Drain pump | Yes | Option for auto daily switch on | Yes, default OFF |
| Peristaltic detergent dispenser | Electronic control | Cycle counter | Yes |
| Peristaltic rinse-aid dispenser | Electronic control | Break tank | Yes |
| Chemicals level probe | Yes, with optional kit KITSONLIV | Partial renewal of water in the tank and built-in drain pump | Yes |
| Automatic built softener | Yes | Water supply pipe diameter | DN15 - 1/2" |
| Rinse boiler Thermostop system | Yes - default | Drain supply pipe diameter | DN20-G 3/4" |
| Wash tank Thermostop system | Yes | Detergent (red) hose lenght | 2,2 m |
| Wash pump soft start system | Yes | Rinse aid (blue) hose lenght | 2,2 m |
| Stand-by system | Yes | | |

Logistic Information

| | | | |
|-----------------------------------|----------------|--------------|-----------|
| EAN code | 8017709348816 | Net weight | 59,000 kg |
| Packed product dimensions (WxDxH) | 890x660x700 mm | Gross weight | 66,000 kg |

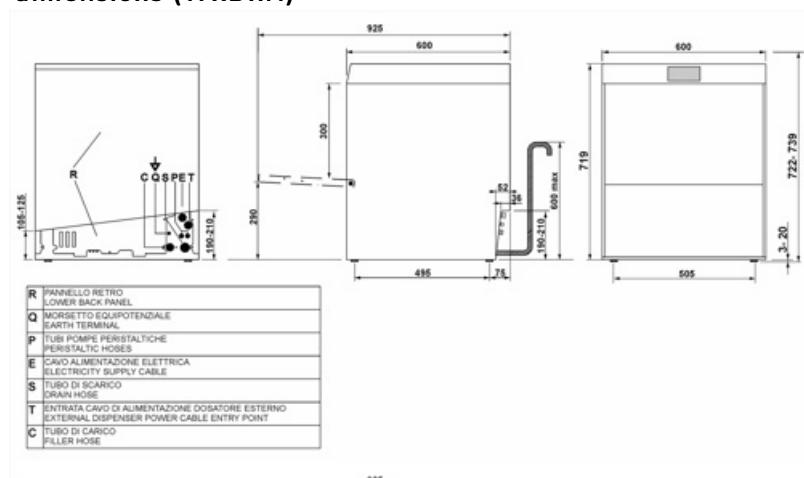

Compatible Accessories

KITDETKCC500




Kit for detergent (1l) and rinse aid (1l) storage for double wall models



KITSONLIV

Probe level kit




PB50D01

Polypropylene basket for 18 plates
Ø250 mm max, dim. (WxDxH)
500x500x105 mm



PB50G01

Universal flat bottom polypropylene basket, internal height 73 mm, dim.
(WxDxH) 500x500x100 mm



PB50G02

Universal flat bottom polypropylene basket, internal height 150 mm, dim.
(WxDxH) 500x500x170 mm




PHOOS01

Polypropylene single basket for cutlery



WB50D01

Wire basket for 18 dishes Ø250 mm max or trays h 370 mm, dim. (WxDxH)
500X500x92 mm



WB50G01

Universal wire basket with flat bottom, internal height 120 mm, dim.
(WxDxH) 500x500x130 mm



WB50G02

Wire basket with sloped bottom for 25 glasses Ø90 mm max, dim. (WxDxH)
500x500x170 mm



WB50G03

Wire basket with sloped bottom for glasses Ø72 mm max, dim. (WxDxH)
500x500x235 mm



WB50G04

Wire basket with sloped bottom for 12 glasses Ø110 mm max, dim. (WxDxH)
500x500x165 mm



WB50PG5

Wire basket with flat bottom for 25 plastic glasses, max. H 230 mm, min.-max. Ø 36-95 mm, dim. (WxDxH)
500x500x260 mm



WB50T02

Wire basket for 7 trays GN1/1 h 20 mm, dim. (WxD)
500x500 mm



WH00S01

Wire insert for 17 small dishes, width 100 mm, for flat bottom baskets
500x500 and 600x500 mm



WS5

Stainless steel underframe for undercounter glasswashers and dishwashers 500 mm, dim. (WxDxH)
595x595x490 mm

Symbols glossary



HTR RINSING SYSTEM



5 STAGE FILTER



MAX. LOAD HEIGHT 300mm



Professional appliance with Wi-fi connectivity
and remote control via Remote SmegConnectPro
App.



Wi-Fi connectivity

Benefit (TT)

Balanced door

Effortless opening and closing

The counterbalanced door is designed to ensure smooth and effortless opening and closing, providing high user convenience. Additionally, it can be locked in a halfway position, a particularly useful feature for promoting natural drying at the end of the workday, enhancing overall hygiene and preventing the buildup of residual moisture.

5-stage system

Deep cleaning and spotless washes with the patented filtration system

The innovative Smeg filtration system consists of 5 stages to completely eliminate all impurities: the 1st stage captures larger food residues; in the 2nd and 3rd stages, finer particles are captured at this filtration stage; the 4th stage features a pre-filtration grid to prevent debris from entering the tank and clouding the water. Finally, the last stage is designed to further protect the washing and draining pumps from any debris that may accidentally enter the tank during filter cleaning.

HTR+ System

Self-adaptive rinsing system for intelligent water management

The self-Adaptive HTR+ System monitors and adjusts the rinse volume with each wash cycle. The intelligent rinse management ensures the perfect amount of water and heat on the dishes, delivering consistent, reliable results, cycle after cycle.

Moulded tank

Superior washing performance and enhanced cleaning convenience with molded tub bottoms and basket guides

Smeg dishwashers are designed with moulded tank and basket guides. The absence of sharp edges ensures an optimised wash flow, guaranteeing hygiene and impeccable cleaning performance. Furthermore, this innovative design simplifies machine cleaning, reducing the need for maintenance interventions.

Integrated softener

Effective water treatment for consistently sparkling glasses

The integrated continuous regeneration water softener ensures effective water treatment, enhancing washing performance and preserving the machine's operational lifespan. The resin regeneration process takes place during the wash cycle without interruptions, providing constant control over water hardness. This system prevents limescale buildup, maximises detergent efficiency, and guarantees spotless results on glassware and dishes.

Integral double-skin

Thermal and acoustic insulation guaranteed

The double-skin design of undercounter dishwashers is engineered to optimise energy efficiency by minimising heat loss and accelerating water heating, resulting in lower energy consumption and faster start-up times. Additionally, it provides effective sound insulation, helping to reduce noise levels and ensuring a quieter, more comfortable working environment for staff.

Drain pump

Partial water replacement during the wash cycle for clean and hygienic dishes

The standard drain pump, equipped with a partial water exchange system, ensures that the dirtiest water is automatically removed at every wash cycle. This mechanism allows for continuous renewal of the water used, ensuring that each phase of the washing process is carried out with clean water. The result is optimal dishwashing performance, with outstanding efficiency and an impeccable level of hygiene.

Soft-start system

Effective management of the washing pump to protect your glassware

The Soft-Start function initiates the wash cycle gently and gradually, progressively increasing the water pressure. This system has been designed to provide optimal protection for the most fragile items, such as crystal glasses, significantly reducing the risk of chipping or damage. At the same time, it ensures excellent cleaning performance, combining efficiency and safety in every wash cycle.

MyPersonal Wash

10 pre-set washing programmes for a complete and ready-to-use solution

Each model in the PURA range offers 10 tested programmes, ensuring ready-to-use solutions for any washing requirement. With the MyPersonal Wash function, parameters such as time, temperature, pressure, and washing options can be customised, optimising cycles for delicate dishes or stubborn dirt. The result is a tailored wash, always flawless.

AdaptWash system

Consistently perfect washing pressure for flawless results with every wash

The AdaptWash system offers 3 pressure levels that automatically adjust based on the selected program, ensuring optimal cleaning for every type of load.

Hood lift

Unprecedented comfort with the patented lifting system

The new ergonomic handle, combined with the patented lifting system, minimises the effort required to open and close the hood, limiting it to just 2.5 kg. This system ensures an exceptionally smooth and lightweight operation, helping to protect the operator's health and well-being, even during extended use.

Program visibility

Program selection displayed for simplified dishwasher management

Users can select the programs to be displayed, hiding those that are unnecessary or unused. This feature not only helps prevent improper use of the appliance but also represents a significant step towards fully customising the user experience.