

# SPH503L

Family	Professional dishwasher
Subfamily	Hoodtype
Type	Hoodtype dishwashers
Crockery	Crockery; Glasses; Cutlery; GN1/1 trays
Basket dimensions	500x500 mm
Control panel	Electronic
Standard drain pump with partial water renewal in the wash tank	Yes
Boiler type	Pressure boiler
Wash pump	Standard
Power connection	400 V 3N~ / 16 A / 9,7 kW / 50 Hz
Product dimensions (WxDxH)	634x750x1440 mm



## Target

Industries	Bar / Cafeterias / Bistros / Wine bars / Pubs; Hotels; Restaurants; Bakeries / Pastry shops; Food Industries; Care facilities ; Grocery shops / Food retail; Catering; Commercial food services; Butcher shops / Delicatessens
------------	--

## Aesthetics

Led color	Red	Series	Ecoline
-----------	-----	--------	---------

## Technical Features

Trays number	7 x GN1/1	Max. inlet temperature	60°C
Trays washing option	Yes	Max water hardness	5°f - 3°dH
Water consumption per cycle	3,2 l	Inlet pressure	250-1000 kPa (min-max)
Wash temperature (min-max)	58 °C	Detergent load	1,5 l/h
Rinse temperature (min-max)	87 °C	Rinse load	0,4 l/h
Min. water connection temperature	5°C	Usable load height	470 mm
Minimum water consumption per cycle	3,2 l	Maximum height with open hood	2055 mm

## Programs

<b>Programs</b>	3 automatic programs; Self-cleaning programs
<b>Program options</b>	Extra rinse; Clean water cycle
<b>Program table</b>	Electronic Ecoline hoodtype
<b>Maximum basket/hour</b>	40
<b>Maximum dishes/hour</b>	720
<b>Maximum glasses/hour</b>	1440

## Electrical Connection

<b>Tank heating element power</b>	2200 W	<b>Default connection</b>	9700 W
<b>Boiler heating element power</b>	9000 W	<b>Optional electrical connection</b>	230 V 3~ / 28 A / 9,7 kW / 50 Hz; 230 V~ / 16 A / 3,7 kW / 50 Hz; 230 V~ / 30 A / 6,7 kW / 50 Hz
<b>Wash pump power</b>	700 W	<b>Plug</b>	Not present

## Interface

<b>Display</b>	4 digit	<b>Cycle progress alert</b>	Yes
<b>Number of buttons</b>	5	<b>End-cycle alert</b>	Yes
<b>On/Off button</b>	Yes	<b>Manual diagnostic</b>	Yes

## Construction

<b>Tank Construction</b>	Deep drawn Single-skin hood	<b>Filter</b>	5-stage filter system
<b>Tank material</b>	Stainless steel AISI 304	<b>Tank capacity</b>	14 l
<b>Back panel</b>	Prepainted	<b>Boiler capacity</b>	8 l
<b>Upper wash system</b>	One wash and one split rinse spray arms, stainless steel	<b>Noise</b>	Lpa 63,1 dBA
<b>Lower wash system</b>	One wash and one split rinse spray arms, stainless steel	<b>Protection class</b>	IPX4
<b>Tank filter</b>	Stainless steel	<b>Adjustable feet</b>	Yes
<b>Hood elevation system</b>	Manual	<b>Drain max. height</b>	1000 mm

## Accessories included


<b>Dish basket</b>	1x PB50D01	<b>Water supply hose</b>	Yes - 2 m
<b>Cutlery basket</b>	1x PHOOS04	<b>Drain hose</b>	Yes - 2m
<b>Flat basket</b>	1x PB50G02		

## Equipments

Peristaltic detergent dispenser	Electronic control	Option for auto daily switch on	Yes, default OFF
Peristaltic rinse-aid dispenser	Electronic control	Cycle counter	Yes
Default chemicals dosing unit of measure	gr/lt	Water supply pipe diameter	DN15 - ½"
Rinse boiler Thermostop system	Yes - default	Drain supply pipe diameter	DN20-G 3/4"
Wash tank Thermostop system	Yes	Detergent (red) hose length	2,2 m
Wash pump soft start system	Yes	Rinse aid (blue) hose length	2,2 m
Stand-by system	Yes		

## Logistic Information

EAN code	8017709339036	Net weight	98,000 kg
Packed product dimensions (WxDxH)	700x900x1700 mm	Gross weight	117,000 kg

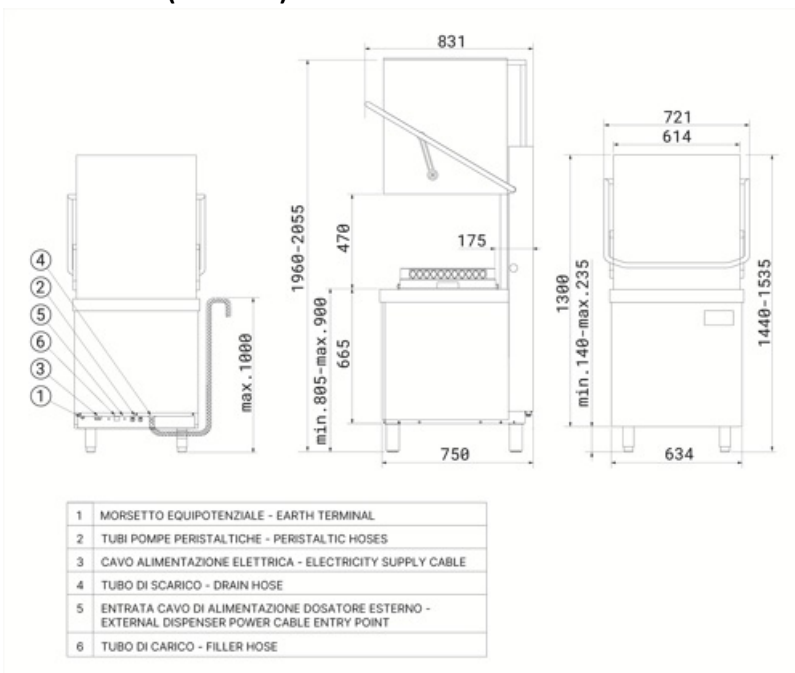


## Compatible Accessories



### KITSONLIV

Probe level kit



### PB50G01

Universal flat bottom polypropylene basket, internal height 73 mm, dim. (WxDxH) 500x500x100 mm



### PHOGR5

Tilted glass insert for basket PB50G02 500x500 mm, configurable with 4 units of 5 glasses each (first line Ø max 110 mm, lines 2-4 Ø max 95 mm), or 5 units of 5 glasses each (first line Ø max 95 mm, lines 2-5 Ø max 75 mm)



### PHOOS03

8 compartments polypropylene basket for cutlery



### WB50D01

Wire basket for 18 dishes Ø250 mm max or trays h 370 mm, dim. (WxDxH) 500x500x92 mm



### WB50G02

Wire basket with sloped bottom for 25 glasses Ø90 mm max, dim. (WxDxH) 500x500x170 mm



### WB50G04

Wire basket with sloped bottom for 12 glasses Ø110 mm max or 9 glasses Ø135 mm max, dim. (WxDxH) 500x500x165 mm




### WB50T02

Wire basket for 7 trays GN1/1 h 20 mm, dim. (WxD) 500x500 mm



### PB50D01

Polypropylene basket for 18 plates Ø250 mm max, dim.(WxDxH) 500x500x105 mm



### PB50T01

Polypropylene basket for 8 trays GN 1/1 h 40 mm for traywasher and hood-type models. Vertical row spacing 68 mm and horizontal row spacing 54 mm, dim. (WxDxH) 500x500x105 mm



### PHOOS01

Polypropylene single basket for cutlery



### PHOOS04

4 compartments polypropylene basket for cutlery



### WB50G01

Universal wire basket with flat bottom, internal height 120 mm, dim. (WxDxH) 500x500x130 mm




### WB50G03

Wire basket with sloped bottom for glasses Ø72 mm max, dim. (WxDxH) 500x500x235 mm



### WB50PG5

Wire basket with flat bottom for 25 plastic glasses, max. H 230 mm, min.-max. Ø 36-95 mm, dim. (WxDxH) 500x500x260 mm



### WH00S01

Wire insert for 17 small dishes, width 100 mm, for flat bottom baskets 500x500 and 600x500 mm



**WT51200SHL**

Entry table left side with sink and scraping hole, splashback (100mm) and lower shelf, dim. (WxDxH) 1200x720x821,5 mm



**WT51200SL**

Entry table left side with sink, splashback (100mm) and lower shelf, dim. (WxDxH) 1200x720x821,5 mm



**WT5700SR**

Entry table right side with sink, splashback (100mm) and lower shelf, dim. (WxDxH) 700x720x821,5 mm



**WT51200SHR**

Entry table right side with sink and scraping hole, splashback (100mm) and lower shelf, dim. (WxDxH) 1200x720x821,5 mm



**WT51200SR**

Entry table right side with sink, splashback (100mm) and lower shelf, dim. (WxDxH) 1200x720x821,5 mm



**WTC5L**

Left side closure kit for Hoodtype



**WTC5R**

Right side closure kit for Hoodtype

**WTX51200**

Universal entry/exit table for either side, with lower shelf, dim. (WxDxH) 1200x560x821,5 mm



**WTX51200L**

Exit left side table, with splashback (100 mm) and lower shelf, dim. (WxDxH) 1200x720x821,5 mm



**WTX51200R**

Exit right side table, with splashback (100 mm) and lower shelf, dim. (WxDxH) 1200x720x821,5 mm



**WTX5700**

Universal entry/exit table for either side, with lower shelf, dim. (WxDxH) 700x560x821,5 mm



**WTX5700L**

Exit table left side, with back splashback (100mm) and lower shelf, dim. (WxDxH) 700x720x821,5 mm



**WTX5700R**

Exit table right side, with back splashback (100mm) and lower shelf, dim. (WxDxH) 700x720x821,5 mm



**WTX6700F**

Universal table for either side, with front coupling and lower shelf, dim. (WxDxH) 705x660x821,5 mm

---

## Benefit (TT)

---

### Interface

Control panel with electronic buttons

The electronic control panel features an intuitive interface with soft-touch buttons, allowing easy selection of one of the three wash programmes: short, medium, or intensive. There are also buttons for power, selection, and cycle start. The display provides real-time monitoring of the tank and boiler temperature, as well as diagnostics, ensuring effortless and immediate control of the main functions.

### 5-stage system

Deep cleaning and spotless washes with the patented filtration system

The innovative Smeg filtration system consists of 5 stages to completely eliminate all impurities: the 1st stage captures larger food residues; in the 2nd and 3rd stages, finer particles are captured at this filtration stage; the 4th stage features a pre-filtration grid to prevent debris from entering the tank and clouding the water. Finally, the last stage is designed to further protect the washing and draining pumps from any debris that may accidentally enter the tank during filter cleaning.

### Moulded tank

Superior washing performance and enhanced cleaning convenience with molded tub bottoms and basket guides

Smeg dishwashers are designed with moulded tank and basket guides. The absence of sharp edges ensures an optimised wash flow, guaranteeing hygiene and impeccable cleaning performance. Furthermore, this innovative design simplifies machine cleaning, reducing the need for maintenance interventions.

### Single-skin hood

Thermal and acoustic insulation guaranteed

The hood of the Ecoline features a single-skin structure designed to enhance energy efficiency by reducing heat dispersion. Additionally, it provides good sound insulation, helping to lower noise levels and ensure a quieter, more comfortable working environment for staff.

### Drain pump

Partial water replacement during the wash cycle for clean and hygienic dishes

The standard drain pump, equipped with a partial water exchange system, ensures that the dirtiest water is automatically removed at every wash cycle. This mechanism allows for continuous renewal of the water used, ensuring that each phase of the washing process is carried out with clean water. The result is optimal dishwashing performance, with outstanding efficiency and an impeccable level of hygiene.

### Soft-start system

Effective management of the washing pump to protect your glassware

The Soft-Start function initiates the wash cycle gently and gradually, progressively increasing the water pressure. This system has been designed to provide optimal protection for the most fragile items, such as crystal glasses, significantly reducing the risk of chipping or damage. At the same time, it ensures excellent cleaning performance, combining efficiency and safety in every wash cycle.

## Hood lift

Unprecedented comfort with the patented lifting system

The new ergonomic handle, combined with the patented lifting system, minimises the effort required to open and close the hood, limiting it to just 2.5 kg. This system ensures an exceptionally smooth and lightweight operation, helping to protect the operator's health and well-being, even during extended use.