

# SPH525SH

Family	Professional dishwasher
Subfamily	Hoodtype dishwashers
Type	Hoodtype
Crockery	Crockery; Glasses; Cutlery; GN1/1 trays
Basket dimensions	500x500 mm
Control panel	Touch screen
Rinse pump	Self-Adaptive HTR+
Wash pump	Variable speed AdaptWash
SHR + steam heat recovery	Yes
Power connection	400 V 3N~ / 16 A / 10 kW / 50 Hz



## Target

Industries	Bar / Cafeterias / Bistros / Wine bars / Pubs; Hotels; Ristoranti / Catering; Bakeries / Pastry shops; Butcher shops / Delicatessens; Food Industries; Catering; Care facilities ; Commercial food services; Grocery shops / Food retail
------------	---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

## Aesthetics

Series	Pura	Led color	White
--------	------	-----------	-------

## Technical Features

Trays washing option	Yes	Max water hardness	54°f - 30°dH
Trays number	7 x GN 1/1 (530 x 325 mm)	Inlet pressure	100-1000 kPa (min-max)
Water consumption per cycle	2,5 l	Detergent load	1,5 l/h
Wash temperature (min-max)	60 °C - 70 °C	Rinse load	0,4 l/h
Rinse temperature (min-max)	65 °C - 85 °C	Usable load height	470 mm
Minimum water consumption per cycle	1,8 l	Maximum height with open hood	2102 mm
Min. water connection temperature	5°C	Product dimensions WxDxH	634x831x1523 mm

Max. inlet temperature 20°C

## Programs

Programs	10 customizable programs; Self-cleaning programs
Program options	Extra rinse; Clean water cycle
Program table	Pura hoodtype
Program visibility	Yes
Maximum basket/hour	45
Maximum dishes/hour	810
Maximum glasses/hour	1620

## Connectivity



SmegConnect Pro Connectivity	Yes Wi-Fi	PST certificate support period [UK]	24 months
		UK PSTI support period end date	2028-04-09

## Electrical Connection

Plug	Not present	Wash pump power	700 W
Tank heating element power	2200 W	Default connection	10000 W
Boiler heating element power	7050 W	Optional electrical connection	230 V 3~ / 27 A / 10 kW / 50 Hz; 230 V~ / 16 A / 3,6 kW / 50 Hz; 230 V~ / 31 A / 7,1 kW / 50 Hz

## Interface

Display	TFT	Detergent missing alert	Yes
On/Off button	Yes	Cycle progress alert	Yes
Salt alert	Yes	End-cycle alert	Yes
Rinse aid missing alert	Yes	Manual diagnostic	Yes

## Construction

Tank Construction	Deep drawn	Filter presence sensor	Yes
Tank material	Double-skin hood	Tank capacity	14 l
Back panel	Stainless steel AISI 304	Boiler capacity	10 l
Upper wash system	Prepainted	Boiler type	Artmosferic boiler
	One wash and one split rinse spray arms, stainless steel	Noise	Lpa 59,9 dBA
		USB port	Yes
		Protection class	IPX4
		Adjustable feet	Yes
		Drain max. height	1000 mm

Lower wash system	One wash and one split rinse spray arms, stainless steel
Tank filter	Stainless steel
Hood elevation system	Manual
Filter	5-stage filter system

## Accessories included


Dish basket	1x PB50D01	Water supply hose	Yes - 2m
Cutlery basket	1x PHOOS02	Drain hose	Yes - 2m
Flat basket	1x PB50G02		

## Equipments

Drain pump	Yes	Stand-by system	Yes
Peristaltic detergent dispenser	Electronic control	Option for auto daily switch on	Yes, default OFF
Peristaltic rinse-aid dispenser	Electronic control	Cycle counter	Yes
Chemicals level probe	Yes, with optional kit KITSONLIV	Break tank	Yes
Default chemicals dosing unit of measure	gr/lt	Partial renewal of water in the tank and built-in drain pump	Yes
Automatic built softener	Yes	Water supply pipe diameter	DN15 - ½"
Rinse boiler Thermostop system	Yes - default	Drain supply pipe diameter	DN20-G 3/4"
Wash tank Thermostop system	Yes	Detergent (red) hose lenght	2,2m
Wash pump soft start system	Yes	Rinse aid (blue) hose lenght	2,2m

## Logistic Information

Width packed product	770 mm	Packed product dimensions	1700X770X900
Depth packed product	900 mm	Net weight	135,000 kg
Height packed product	1700 mm	Gross weight (kg)	154,000

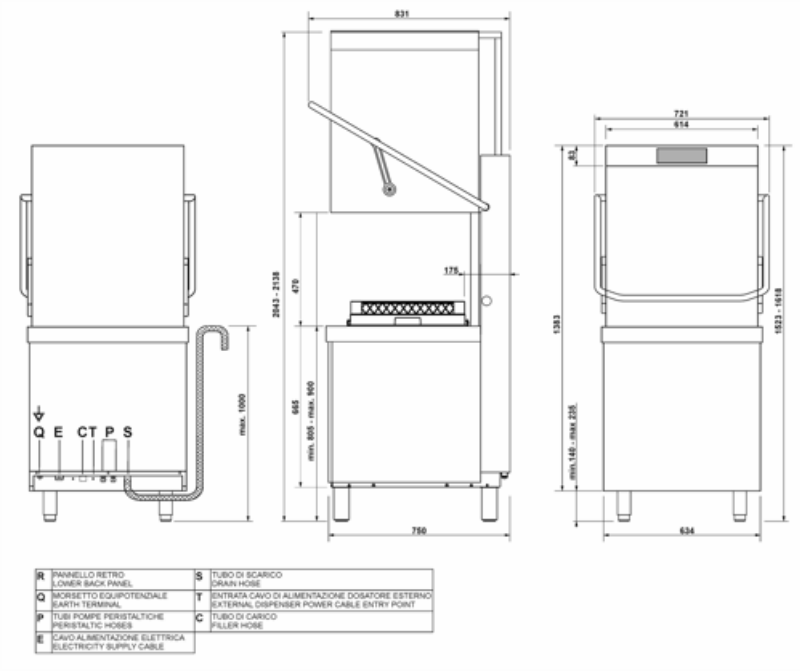


## Compatible Accessories



### KITSONLIV

Probe level kit



### PB50G01

Universal flat bottom polypropylene basket, dim. (WxDxH) 500x500x100 mm



### PB50T01

Polypropylene basket for 8 trays GN 1/1 h 40 mm



### PHOOS02

6 compartment polypropylene basket for cutlery



### WB50D01

Wire basket for 18 dishes Ø250 mm. or self service trays, dim. (WxDxH) 500x500x92 mm



### WB50G02

Wire basket with sloped bottom for glasses Ø90 mm max, dim. (WxDxH) 500x500x170 mm



### WB50G04

Wire basket with sloped bottom for glasses Ø135 mm max, dim. (WxDxH) 500x500x165 mm



### WB50T02

Wire basket for 7 trays GN1/1 h 20 mm




### WT51200SHL

Entry table left side with sink and scraping hole, splashback (100mm) and lower shelf, dim. (WxDxH) 1200x720x821, 5 mm




### WT51200SL

Entry table left side with sink, splashback (100mm) and lower shelf, dim. (WxDxH) 1200x720x821, 5 mm



### PB50D01

Polypropylene basket for 18 plates Ø250 mm, dim. (WxDxH) 500x500x105 mm



### PB50G02

Universal flat bottom polypropylene basket, dim. (WxDxH) 500x500x170 mm



### PHOOS01

Polypropylene single basket for cutlery



### PHOOS03

8 compartments polypropylene basket for cutlery



### WB50G01

Universal wire basket with flat bottom, dim. (WxDxH) 500x500x123 mm



### WB50G03

Wire basket with sloped bottom for glasses Ø72 mm max, dim. (WxDxH) 500x500x235 mm



### WB50PG5

Wire basket with flat bottom for 25 plastic glasses, dim. (WxDxH) 500x500x260 mm



### WH00S01

Wire insert for 12 small dishes



### WT51200SHR

Entry table right side with sink and scraping hole, splashback (100mm) and lower shelf, dim. (WxDxH) 1200x720x821, 5 mm



### WT51200SR

Entry table right side with sink, splashback (100mm) and lower shelf, dim. (WxDxH) 1200x720x821, 5 mm



### WT5700SL

Entry table left side with sink, splashback (100mm) and lower shelf, dim. (WxDxH) 700x720x821, 5 mm



### WT5700SR

Entry table right side with sink, splashback (100mm) and lower shelf, dim. (WxDxH) 700x720x821, 5 mm



### WTX51200

Universal entry/exit table for either side, with lower shelf, dim. (WxDxH) 1200x560x821, 5 mm



### WTX51200L

Exit left side table, with splashback (100 mm) and lower shelf, dim. (WxDxH) 1200x720x821, 5 mm



### WTX51200R

Exit right side table, with splashback (100 mm) and lower shelf, dim. (WxDxH) 1200x720x821, 5 mm



### WTX5700

Universal entry/exit table for either side, with lower shelf. dim. (WxDxH) 700x560x821, 5 mm.



### WTX5700L

Exit table left side, with back splashback (100mm) and lower shelf, dim. (WxDxH) 700x720x821, 5 mm












### WTX5700R

Exit table right side, with back splashback (100mm) and lower shelf, dim. (WxDxH) 700x720x821, 5 mm

---

## Symbols glossary

---

 A square icon with a black border containing the text "A0=" above the number "30".	THERMODESINFECTION A0=30	 A square icon with a black border containing the text "A0=" above the number "60".	THERMODESINFECTION A0=60
 A square icon with a black border containing the text "GN1/1" above a stylized illustration of a tray.	SUITABLE FOR GASTRONORM TRAY	 A square icon with a black border containing a stylized illustration of water being sprayed from a nozzle.	HTR RINSING SYSTEM
 A square icon with a black border containing a stylized illustration of a multi-stage filter.	5 STAGE FILTER	 A square icon with a black border containing the text "SHR" above a stylized illustration of a hand holding a steam pipe.	STEAM HEAT RECOVERY SYSTEM
 A square icon with a black border containing a stylized illustration of a person standing next to a vertical dimension line labeled "470mm".	MAX. USABLE HEIGHT 470mm	 A square icon with a black border containing the Smeg logo above a Wi-Fi symbol.	Professional appliance with Wi-fi connectivity and remote control via Remote SmegConnectPro App.
 A square icon with a black border containing a standard Wi-Fi symbol.	Wi-Fi connectivity		

## Benefit (TT)

---

### 5-stage system

Deep cleaning and spotless washes with the patented filtration system

The innovative Smeg filtration system consists of 5 stages to completely eliminate all impurities: the 1st stage captures larger food residues; in the 2nd and 3rd stages, finer particles are captured at this filtration stage; the 4th stage features a pre-filtration grid to prevent debris from entering the tank and clouding the water. Finally, the last stage is designed to further protect the washing and draining pumps from any debris that may accidentally enter the tank during filter cleaning.

The presence sensor filter alerts if the filtration system is out of position, ensuring safe washes every time.

### HTR+ System

Self-adaptive rinsing system for intelligent water management

The self-Adaptive HTR+ System monitors and adjusts the rinse volume with each wash cycle. The intelligent rinse management ensures the perfect amount of water and heat on the dishes, delivering consistent, reliable results, cycle after cycle.

### SHR+ System

Steam heat recovery system for energy savings and improved work environment quality

Il sistema SHR+ elimina il 100% del vapore prodotto durante la fase di risciacquo, migliorando la qualità dell'aria e riducendo l'umidità negli ambienti di lavoro. Inoltre, recupera energia dai vapori abbattuti, assicurando un risparmio energetico giornaliero ed evitando i costi di un impianto di aspirazione esterno.

### Moulded tank

Superior washing performance and enhanced cleaning convenience with molded tub bottoms and basket guides

Smeg dishwashers are designed with moulded tank and basket guides. The absence of sharp edges ensures an optimised wash flow, guaranteeing hygiene and impeccable cleaning performance. Furthermore, this innovative design simplifies machine cleaning, reducing the need for maintenance interventions.

### Integrated softener

Effective water treatment for consistently sparkling glasses

The integrated continuous regeneration water softener ensures effective water treatment, enhancing washing performance and preserving the machine's operational lifespan. The resin regeneration process takes place during the wash cycle without interruptions, providing constant control over water hardness. This system prevents limescale buildup, maximises detergent efficiency, and guarantees spotless results on glassware and dishes.

### Double-skin hood

Thermal and acoustic insulation guaranteed

The double-skin design of the hood is engineered to optimise energy efficiency by minimising heat dispersion and accelerating water heating, resulting in lower energy consumption and faster start-up times. Additionally, it provides effective sound insulation, helping to reduce noise levels and ensuring a quieter, more comfortable working environment for staff.



## **Drain pump**

Partial water replacement during the wash cycle for clean and hygienic dishes

The standard drain pump, equipped with a partial water exchange system, ensures that the dirtiest water is automatically removed at every wash cycle. This mechanism allows for continuous renewal of the water used, ensuring that each phase of the washing process is carried out with clean water. The result is optimal dishwashing performance, with outstanding efficiency and an impeccable level of hygiene.

## **Soft-start system**

Effective management of the washing pump to protect your glassware

The Soft-Start function initiates the wash cycle gently and gradually, progressively increasing the water pressure. This system has been designed to provide optimal protection for the most fragile items, such as crystal glasses, significantly reducing the risk of chipping or damage. At the same time, it ensures excellent cleaning performance, combining efficiency and safety in every wash cycle.

## **MyPersonal Wash**

10 pre-set washing programmes for a complete and ready-to-use solution

Each model in the PURA range offers 10 tested programmes, ensuring ready-to-use solutions for any washing requirement. With the MyPersonal Wash function, parameters such as time, temperature, pressure, and washing options can be customised, optimising cycles for delicate dishes or stubborn dirt. The result is a tailored wash, always flawless.

## **AdaptWash system**

Consistently perfect washing pressure for flawless results with every wash

The AdaptWash system offers 3 pressure levels that automatically adjust based on the selected program, ensuring optimal cleaning for every type of load.

## **Hood lift**

Unprecedented comfort with the patented lifting system

The new ergonomic handle, combined with the patented lifting system, minimises the effort required to open and close the hood, limiting it to just 2.5 kg. This system ensures an exceptionally smooth and lightweight operation, helping to protect the operator's health and well-being, even during extended use.

## **Program visibility**

Program selection displayed for simplified dishwasher management

Users can select the programs to be displayed, hiding those that are unnecessary or unused. This feature not only helps prevent improper use of the appliance but also represents a significant step towards fully customising the user experience.