SPH625

Family	Professional dishwasher
Subfamily	Hoodtype dishwashers
Type	Hoodtype
Crockery	Crockery; Glasses; Cutlery; EN 600x400 trays; GN1/1 trays
Basket dimensions	600x500 and 500x500 mm
Control panel	Touch screen
Rinse pump	Self-Adaptive HTR+
Wash pump	Variable speed AdaptWash
Power connection	400 V 3N~ / 16 A / 10 kW / 50 Hz

Target

Industries	Hotels; Ristoranti / Catering; Bakeries / Pastry shops; Butcher shops / Delicatessens; Food Industries; Catering; Care facilities ; Commercial food services; Grocery shops / Food retail

Aesthetics

Series	Pura	**Led color**	White

Technical Features

Trays washing option	Yes	**Max water hardness**	12°f - 7°dH
Trays number	7 x GN 1/1 (530 x 325 mm); 6 x EN 1/1 (600 x 400 mm)	**Inlet pressure**	100-1000 kPa (min-max)
Water consumption per cycle	2,5 l	**Detergent load**	1,5 l/h
Wash temperature (min-max)	60 °C - 70 °C	**Rinse load**	0,4 l/h
Rinse temperature (min-max)	65 °C - 85 °C	**Usable load height**	470 mm
Minimum water consumption per cycle	1,8 l	**Maximum height with open hood**	2040 mm
Min. water connection temperature	5°C	**Product dimensions WxDxH**	734x831x1523 mm
Max. inlet temperature	60°C		

Programs

Programs	10 customizable programs; Self-cleaning programs
Program options	Extra rinse; Clean water cycle
Program table	Pura hoodtype
Program visibility	Yes
Maximum basket/hour	45
Maximum dishes/hour	990
Maximum glasses/hour	2520

Connectivity

SmegConnect Pro	Yes
Connectivity	Wi-Fi
PST certificate support period [UK]	24 months
UK PSTI support period end date	2028-04-09

Electrical Connection

Tank heating element power	2200 W
Boiler heating element power	7050 W
Wash pump power	700 W
Default connection	10000 W
Optional electrical connection	230 V 3~ / 27 A / 10 kW / 50 Hz; 230 V~ / 16 A / 3,6 kW / 50 Hz; 230 V~ / 31 A / 7,1 kW / 50 Hz

Interface

Display	TFT
On/Off button	Yes
Rinse aid missing alert	Yes
Detergent missing alert	Yes
Cycle progress alert	Yes
End-cycle alert	Yes
Manual diagnostic	Yes

Construction

Tank	Deep drawn
Construction	Double-skin hood
Tank material	Stainless steel AISI 304
Back panel	Prepainted
Upper wash system	One wash and one split rinse spray arms, stainless steel
Lower wash system	One wash and one split rinse spray arms, stainless steel
Tank filter	Stainless steel
Filter presence sensor	Yes
Tank capacity	22 l
Boiler capacity	10 l
Boiler type	Artmosferic boiler
Noise	Lpa 59,9 dBA
USB port	Yes
Protection class	IPX4
Adjustable feet	Yes
Drain max. height	1000 mm

Hood elevation system	Manual
Filter	5-stage filter system

Accessories included

Dish basket	1x PB60D01	**Water supply hose**	Yes - 2m
Cutlery basket	1x PHOOS03	**Drain hose**	Yes - 2m
Flat basket	1x PB60G01		

Equipments

Drain pump	Yes	**Option for auto daily switch on**	Yes, default OFF
Peristaltic detergent dispenser	Electronic control	**Cycle counter**	Yes
Peristaltic rinse-aid dispenser	Electronic control	**Break tank**	Yes
Chemicals level probe	Yes, with optional kit KITSONLIV	**Partial renewal of water in the tank and built-in drain pump**	Yes
Rinse boiler Thermostop system	Yes - default	**Water supply pipe diameter**	DN15 - ½”
Wash tank Thermostop system	Yes	**Drain supply pipe diameter**	DN20-G 3/4"
Wash pump soft start system	Yes	**Detergent (red) hose lenght**	2,2m
Stand-by system	Yes	**Rinse aid (blue) hose lenght**	2,2m

Logistic Information

Width packed product	770 mm	**Packed product dimensions**	1700X770X900
Depth packed product	900 mm	**Net weight**	129.000 kg
Height packed product	1700 mm	**Gross weight (kg)**	146.000

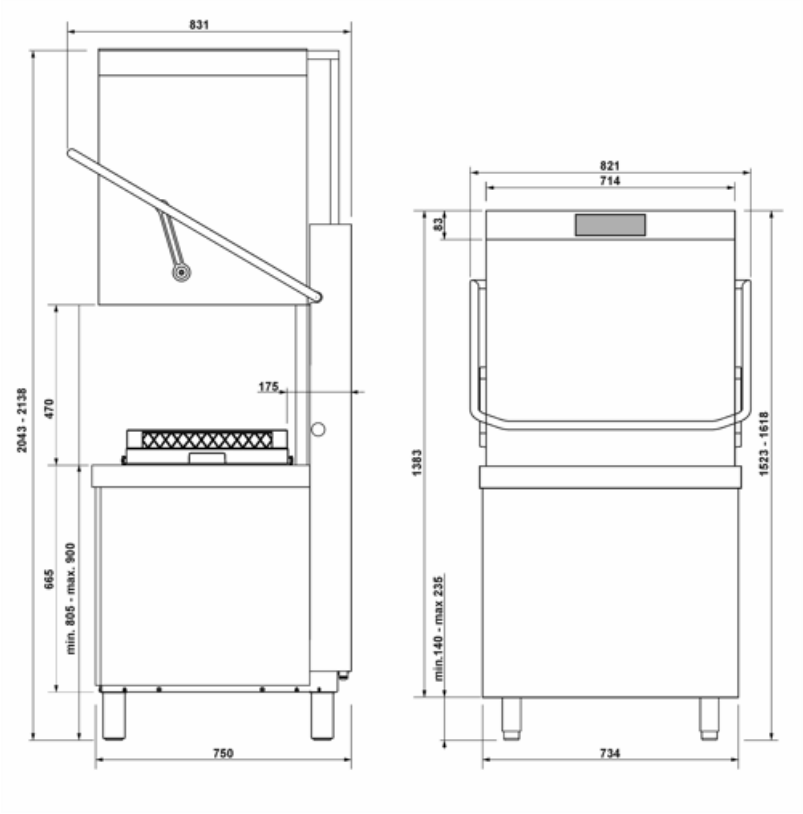
831
2043 - 2138
470
175
665
min. 805 - max. 900
750
821
714
83
1383
1523 - 1618
min.140 - max 235
734

Compatible Accessories

KITSONLIV

Probe level kit



PB50G01

Universal flat bottom polypropylene basket, dim. (WxDxH) 500x500x100 mm



PB50T01

Polypropylene basket for 8 trays GN 1/1 h 40 mm



PB60G01

Universal flat bottom polypropylene basket, dim. (WxDxH) 600x500x115 mm

PHOOS01

Polypropylene single basket for cutlery

PHOOS03

8 compartments polypropylene basket for cutlery

WB50G01

Universal wire basket with flat bottom, dim. (WxDxH) 500x500x123 mm



PB50D01

Polypropylene basket for 18 plates Ø250 mm, dim.(WxDxH) 500x500x105 mm



PB50G02

Universal flat bottom polypropylene basket, dim. (WxDxH) 500x500x170 mm

PB60D01

Polypropylene basket for 22 dishes Ø250 mm, dim. (WxDxH) 600x500x115 mm

PB60T02

Basket for GN1/1 trays, dim. (WxDxH) 600x500x100 mm

PHOOS02

6 compartment polypropylene basket for cutlery

WB50D01

Wire basket for 18 dishes Ø250 mm. or self service trays, dim. (WxDxH) 500X500x92 mm

WB50G02

Wire basket with sloped bottom for glasses Ø90 mm max, dim. (WxDxH) 500x500x170 mm

WB50G04

Wire basket with sloped bottom for glasses Ø135 mm max, dim. (WxDxH) 500x500x165 mm

WB50PG5

Wire basket with flat bottom for 25 plastic glasses, dim. (WxDxH) 500x500x260 mm

WB60D01

Wire basket for 24 dishes Ø260 mm

WB60D02

Wire basket for 24 dishes Ø320 mm

WB60G01

Wire basket with flat bottom, dim. (WxDxH) 600x500x123 mm

WB60T03



Wire basket for 8 trays EN 600x400 mm

WH00S01

Wire insert for 12 small dishes

Symbols glossary

THERMODESINFECTION A0=30

THERMODESINFECTION A0=60

SUITABLE FOR EURONORM TRAY

SUITABLE FOR GASTRONORM TRAY

HTR RINSING SYSTEM

5 STAGE FILTER

Wi-Fi connectivity

MAX. USABLE HEIGHT 470mm

Professional appliance with Wi-fi connectivity and remote control via Remote SmegConnectPro App.

Benefit (TT)

5-stage system

Deep cleaning and spotless washes with the patented filtration system

The innovative Smeg filtration system consists of 5 stages to completely eliminate all impurities: the 1st stage captures larger food residues; in the 2nd and 3rd stages, finer particles are captured at this filtration stage; the 4th stage features a pre-filtration grid to prevent debris from entering the tank and clouding the water. Finally, the last stage is designed to further protect the washing and draining pumps from any debris that may accidentally enter the tank during filter cleaning.
The presence sensor filter alerts if the filtration system is out of position, ensuring safe washes every time.

HTR+ System

Self-adaptive rinsing system for intelligent water management

The self-Adaptive HTR+ System monitors and adjusts the rinse volume with each wash cycle. The intelligent rinse management ensures the perfect amount of water and heat on the dishes, delivering consistent, reliable results, cycle after cycle.

Moulded tank

Superior washing performance and enhanced cleaning convenience with molded tub bottoms and basket guides

Smeg dishwashers are designed with moulded tank and basket guides. The absence of sharp edges ensures an optimised wash flow, guaranteeing hygiene and impeccable cleaning performance. Furthermore, this innovative design simplifies machine cleaning, reducing the need for maintenance interventions.

Double-skin hood

Thermal and acoustic insulation guaranteed

The double-skin design of the hood is engineered to optimise energy efficiency by minimising heat dispersion and accelerating water heating, resulting in lower energy consumption and faster start-up times. Additionally, it provides effective sound insulation, helping to reduce noise levels and ensuring a quieter, more comfortable working environment for staff.

Drain pump

Partial water replacement during the wash cycle for clean and hygienic dishes

The standard drain pump, equipped with a partial water exchange system, ensures that the dirtiest water is automatically removed at every wash cycle. This mechanism allows for continuous renewal of the water used, ensuring that each phase of the washing process is carried out with clean water. The result is optimal dishwashing performance, with outstanding efficiency and an impeccable level of hygiene.

Soft-start system

Effective management of the washing pump to protect your glassware

The Soft-Start function initiates the wash cycle gently and gradually, progressively increasing the water pressure. This system has been designed to provide optimal protection for the most fragile items, such as crystal glasses, significantly reducing the risk of chipping or damage. At the same time, it ensures excellent cleaning performance, combining efficiency and safety in every wash cycle.

MyPersonal Wash

10 pre-set washing programmes for a complete and ready-to-use solution

Each model in the PURA range offers 10 tested programmes, ensuring ready-to-use solutions for any washing requirement. With the MyPersonal Wash function, parameters such as time, temperature, pressure, and washing options can be customised, optimising cycles for delicate dishes or stubborn dirt. The result is a tailored wash, always flawless.

AdaptWash system

Consistently perfect washing pressure for flawless results with every wash

The AdaptWash system offers 3 pressure levels that automatically adjust based on the selected program, ensuring optimal cleaning for every type of load.

Hood lift

Unprecedented comfort with the patented lifting system

The new ergonomic handle, combined with the patented lifting system, minimises the effort required to open and close the hood, limiting it to just 2.5 kg. This system ensures an exceptionally smooth and lightweight operation, helping to protect the operator's health and well-being, even during extended use.

Euronorm

Compatibility with EN 600x400 mm trays

These models offer great versatility, with the ability to wash up to 6 Euronorm 600x400 mm trays. These features make the products extremely useful for a wide range of activities, such as pizzerias, bakeries, bistros, catering, restaurants, and cafés.

Program visibility

Program selection displayed for simplified dishwasher management

Users can select the programs to be displayed, hiding those that are unnecessary or unused. This feature not only helps prevent improper use of the appliance but also represents a significant step towards fully customising the user experience.