

SPH625S

Familia	Lavavajillas
Subfamilia	Lavavajillas de cúpula
Line	Pura
Dimensiones de la cesta	600x500 e 500x500 mm
Rinse pump	Self-Adaptive HTR+
Wash pump	Variable speed AdaptWash
Conexión eléctrica	400 V 3N~ / 16 A / 10 kW / 50 Hz



Equipo accesorios incluidos

Cesta de platos	PB60D01	Tubería de suministro de agua	Si - 2m
Cesta de cubiertos	PHOOS03	Tubo de desagüe	Si - 2m
Cesta plana	PB60G01		

Distribución

Usuarios potenciales	Restaurantes - Pubs; Industria de panadería congelada; Comercio minorista de alimentos; Otra industria alimentaria; Salud y cuidados; catering e Instituciones
-----------------------------	--

Programas

Programs	10 programas personalizables; Programas de autolimpieza
Program options	Aclarado extra; Ciclo de agua limpia
Program table	Pura hoodtype
Program visibility	Sí
Máximo cesto / hora	45
Máximo platos / hora	990
Máximo copas / hora	2520

Interface

Pantalla	TFT	Alerta falta de detergente	Sí
Botón ON/OFF	Sí	Alerta de progreso del ciclo	Sí
Alerta de sal	Sí	Alerta de fin de ciclo	Sí
Alerta de falta de abrillantador	Sí	Diagnóstico manual	Sí

Construcción

Cuba	Produndidad del dibujo	Filter presence sensor	Sí
Construcción de la cuba	Double-skin hood	Capacidad de la cuba	22 l
Material de la cuba	Acero inoxidable AISI 304	Volumen del calderón	10 l
Panel trasero	Prepintado	Ruido	Lpa 59,9 dBA
Upper wash system	Un brazo rociador para lavado y un brazo rociador para aclarado, de acero inoxidable.	Puerto USB	Sí
Lower wash system	Un brazo rociador para lavado y un brazo rociador dividido para aclarado, de acero inoxidable.	Clase de protección	IPX4
Filtro de la cuba	Acero inoxidable	Adjustable feet	Sí
Hood elevation system	Manual	Profundidad de carga	1000 mm
Bomba de desagüe	Sí		

Características técnicas


Trays washing option	Sí	Dureza máxima del agua	54°f - 30°dH
Trays number	7 x GN 1/1 (530 x 325 mm); 6 x EN 1/1 (600 x 400 mm)	Entrada de agua	100-1000 kPa (min-max)
Water consumption per cycle	2,5 l	Dosificador de detergente peristáltico	Si, manual
Wash temperature (min-max)	60 °C - 70 °C	Dosificador de detergente peristáltico	Si, manual
Rinse temperature (min-max)	65 °C - 85 °C	Altura útil de carga	470 mm
Minimum water consumption per cycle	1,8 l	Altura máxima con campana abierta	2040 mm
Entrada de agua	5°C	Product dimensions WxDxH	734x831x1523 mm
Max. inlet temperature	60°C		

Conexión eléctrica

Tank heating element power	2200 W	Conexión por defecto	10000 W
Boiler heating element power	7050 W	Opción de conexión eléctrica	230 V 3~/27 A / 10 kW / 50 Hz; 230 V~/16 A / 3,6 kW / 50 Hz; 230 V~/31 A / 7,1 kW / 50 Hz
Wash pump power	700 W		

Equipamiento

Bomba de desagüe	Sí	Option for auto daily switch on	Si, por defecto desactivado
Peristaltic detergent dispenser	Si, control electrónico	Contador de ciclos	Sí
Peristaltic rinse-aid dispenser	Si, control electrónico	Tanque de rotura	Sí
Nivel de productos químicos	Si, opcional KITSONLIV	Renovación parcial del agua en el tanque e incorporación bomba de drenaje	Sí
Descalcificador incorporado	Sí	Diámetro del tubo de entrada de agua	Si - 1,5m
Rinse boiler Thermostop system	Yes - default	Diámetro del tubo de desagüe	Si - 2m
Wash tank Thermostop system	Sí	Dosificador de detergente peristáltico	Si, manual
Wash pump soft start system	Sí	Dosificador de detergente peristáltico	Si, manual
Stand-by system	Sí		

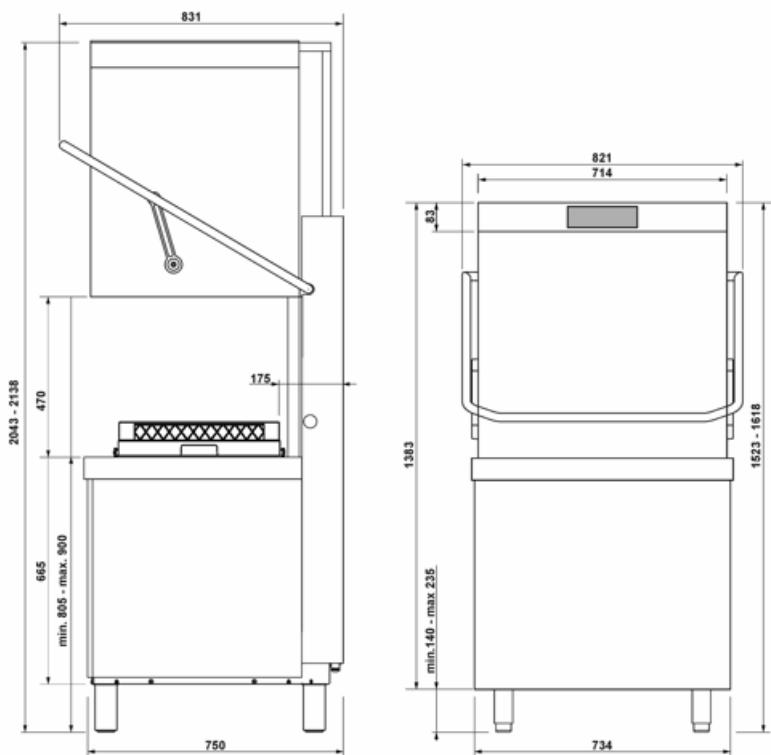

Accesories Compatible

KITSONLIV

Probe level kit



PB50D01

Cesta de polipropileno para 18 platos, 500x500x105 mm




PB50G01

Universal flat bottom polypropylene basket, dim. (WxDxH) 500x500x100 mm



PB50G02

Cesta universal de polipropileno de fondo plano, 500x500x170 mm



PB50T01

Polypropylene basket for 8 trays GN 1/1 h 40 mm



PB60D01

Cesta de polipropileno para 22 platos, 600x500x115 mm



PB60G01

Cesta universal de polipropileno de fondo plano, 600x500x115 mm



PB60T02

Cesta para bandejas GN1/1, 600x500x100 mm



PHOOS01



PHOOS02



WB50D01

Cesta de alambre para 18 platos 250 mm máx. bandejas de diámetro o autoservicio, 500X500mm



WB50G01



WB50G02

Cesta de alambre para vasos de 90 mm de diámetro máximo con fondo inclinado, 500x500x170 mm



WB50G04



WB50PG5

Wire basket with flat bottom for 25 plastic glasses, dim. (WxDxH) 500x500x260 mm



WB60D01




WB60D02

Cesta de alambre para 24 platos diámetro máximo 320 mm, 600X500 mm




WB60G01



WB60T03

Cesta de rejilla para 5 bandejas dim.600x400 mm, 600x500 mm





WH00S01



Symbols glossary

 A0=30	THERMODESINFECTION A0=30	 A0=60	THERMODESINFECTION A0=60
 EN	SUITABLE FOR EURONORM TRAY	 GN1/1	SUITABLE FOR GASTRONORM TRAY
 HTR	RINSING SYSTEM		Electrodoméstico dotado de conexión a la red Wi-Fi
 470mm	MAX. USABLE HEIGHT 470mm	 5 STAGE FILTER	
 C	Professional appliance with Wi-fi connectivity and remote control via Remote SmegConnectPro App.		

Benefit (TT)

5-stage system

Deep cleaning and spotless washes with the patented filtration system

The innovative Smeg filtration system consists of 5 stages to completely eliminate all impurities: the 1st stage captures larger food residues; in the 2nd and 3rd stages, finer particles are captured at this filtration stage; the 4th stage features a pre-filtration grid to prevent debris from entering the tank and clouding the water. Finally, the last stage is designed to further protect the washing and draining pumps from any debris that may accidentally enter the tank during filter cleaning.

The presence sensor filter alerts if the filtration system is out of position, ensuring safe washes every time.

HTR+ System

Self-adaptive rinsing system for intelligent water management

The self-Adaptive HTR+ System monitors and adjusts the rinse volume with each wash cycle. The intelligent rinse management ensures the perfect amount of water and heat on the dishes, delivering consistent, reliable results, cycle after cycle.

Moulded tank

Superior washing performance and enhanced cleaning convenience with molded tub bottoms and basket guides

Smeg dishwashers are designed with moulded tank and basket guides. The absence of sharp edges ensures an optimised wash flow, guaranteeing hygiene and impeccable cleaning performance. Furthermore, this innovative design simplifies machine cleaning, reducing the need for maintenance interventions.

Integrated softener

Effective water treatment for consistently sparkling glasses

The integrated continuous regeneration water softener ensures effective water treatment, enhancing washing performance and preserving the machine's operational lifespan. The resin regeneration process takes place during the wash cycle without interruptions, providing constant control over water hardness. This system prevents limescale buildup, maximises detergent efficiency, and guarantees spotless results on glassware and dishes.

Double-skin hood

Thermal and acoustic insulation guaranteed

The double-skin design of the hood is engineered to optimise energy efficiency by minimising heat dispersion and accelerating water heating, resulting in lower energy consumption and faster start-up times. Additionally, it provides effective sound insulation, helping to reduce noise levels and ensuring a quieter, more comfortable working environment for staff.

Drain pump

Partial water replacement during the wash cycle for clean and hygienic dishes

The standard drain pump, equipped with a partial water exchange system, ensures that the dirtiest water is automatically removed at every wash cycle. This mechanism allows for continuous renewal of the water used, ensuring that each phase of the washing process is carried out with clean water. The result is optimal dishwashing performance, with outstanding efficiency and an impeccable level of hygiene.

Soft-start system

Effective management of the washing pump to protect your glassware

The Soft-Start function initiates the wash cycle gently and gradually, progressively increasing the water pressure. This system has been designed to provide optimal protection for the most fragile items, such as crystal glasses, significantly reducing the risk of chipping or damage. At the same time, it ensures excellent cleaning performance, combining efficiency and safety in every wash cycle.

Mi Lavado Personal

10 programas personalizables para satisfacer todas las necesidades de lavado

Cada modelo de la gama PURA ofrece 10 programas probados, asegurando soluciones listas para cualquier necesidad de lavado. Con la función MyPersonal Wash, se pueden personalizar parámetros como el tiempo, la temperatura, la presión y las opciones de lavado, optimizando los ciclos para vajilla delicada o suciedad resistente. El resultado es un lavado a medida, siempre impecable.

AdaptWash system

Consistently perfect washing pressure for flawless results with every wash

The AdaptWash system offers 3 pressure levels that automatically adjust based on the selected program, ensuring optimal cleaning for every type of load.

Hood lift

Unprecedented comfort with the patented lifting system

The new ergonomic handle, combined with the patented lifting system, minimises the effort required to open and close the hood, limiting it to just 2.5 kg. This system ensures an exceptionally smooth and lightweight operation, helping to protect the operator's health and well-being, even during extended use.

Euronorm

Compatibility with EN 600x400 mm trays

These models offer great versatility, with the ability to wash up to 6 Euronorm 600x400 mm trays. These features make the products extremely useful for a wide range of activities, such as pizzerias, bakeries, bistros, catering, restaurants, and cafés.

Program visibility

Program selection displayed for simplified dishwasher management

Users can select the programs to be displayed, hiding those that are unnecessary or unused. This feature not only helps prevent improper use of the appliance but also represents a significant step towards fully customising the user experience.