

# SPO5L2S



<b>Família</b>	Fornos
<b>Subfamily</b>	Combi steam oven 5 trays GN1/1
<b>Power supply</b>	Elétrico
<b>Oven type</b>	Forno Galileo profissional
<b>Fonte de energia</b>	400 V 3N~ / 17 A / 8 kW / 50-60 Hz
<b>Pés reguláveis em altura</b>	Sim
<b>Product dimensions WxDxH</b>	790x833x645 mm
<b>Profundidade máxima com a porta aberta</b>	1581 mm



## Mercado

<b>Soluções</b>	Hotelaria; Restaurantes/ Pubs; Padarias e pastelarias; Indústria de comida congelada; Retalho alimentar; Health and care; Catering e cantinas
-----------------	--

## Design

<b>Cor</b>	Aço Inox/Preto	<b>Cor dos dígitos no display</b>	Multicor
<b>Porta com tiras em aço inox</b>	Sim	<b>Painel frontal</b>	Vidro/Aço Inox
<b>Display</b>	TFT digital, 7" touch	<b>Logótipo</b>	Logótipo em cunho

## Comandos

<b>Nº de programas em memória</b>	512	<b>Função de pausa</b>	Ajustável
<b>Receitas</b>	Sim	<b>Programas</b>	Sim
<b>Temporizador</b>	de 1 min até 23h59 min por passo	<b>Regulação da chaminé</b>	Automático
<b>Cozinha Multipasso</b>	Sim	<b>Programas de lavagem</b>	Sim
<b>Início diferido</b>	Sim; Não	<b>HACCP data</b>	Sim
<b>Pré-aquecimento</b>	Sim	<b>Auto diagnóstico</b>	Sim

## Opções

Exaustor compatível K510X

## Acessórios incluídos


Sonda térmica Sonda térmica de 4 pontos externos

## ESPECIFICAÇÕES TÉCNICAS


Material do forno	Aço Inox / Vidro / Plástico	Posição de exaustão	Traseira
Dimensões da cavidade (LxPxAl)	670x560x420 mm	Sistema de arrefecimento	Sim
Material da cavidade	Aço inox	Tipo de temporizador	Elétrico
Níveis de tabuleiros	5	Temperaturas	30-270°C
Suporte dos tabuleiros	Aço Inox AISI 304	Aviso de final de cozedura	Sim
Distância entre tabuleiros	70 mm GN1/1 - 90 mm EN 600x400	Reset de segurança do termostato	Sim
Material da porta	Vidro triplo	Deflector removível	Sim
Abertura da porta	Lateral	Tipo de detergente	Líquido
Tipo de puxador	Rotativo	Integrated detergent tank	Vanishing 3l
Vidro	Abre com dobradiça	Interruptor de luz com porta aberta	Sim
Potência da ventoinha	200W	Iluminação	1 lâmpada LED
RPM da ventoinha	Progressão %	Potência das lâmpadas	3.6 W
RPM standard da ventoinha	2850 rpm	Porta USB	Sim
RPM da ventoinha na velocidade inferior	1425 rpm	Tubo de carga de água	Sim
Injeção de água em cada ventoinha	Sim	Nº de entradas de água	1
Níveis de humidificação	Automático / Percentual progressivo	Water inlet pressure	200-1000 kPa (min-max)
Steam control	5-100% (min-max)	Comprimento do cabo de alimentação	170 cm
Caldeira aberta	Sim	Painel traseiro	Porta galvanizada
Ø de drenagem	1" 1/2 - DN 40 mm	Proteção IPX	IPX4

## Dados de logística

Peso líquido (kg)	90.000 kg	Height (mm) packed	700 mm
Packed width	850 mm	Peso bruto (kg)	110.000
Packaged depth	950 mm		

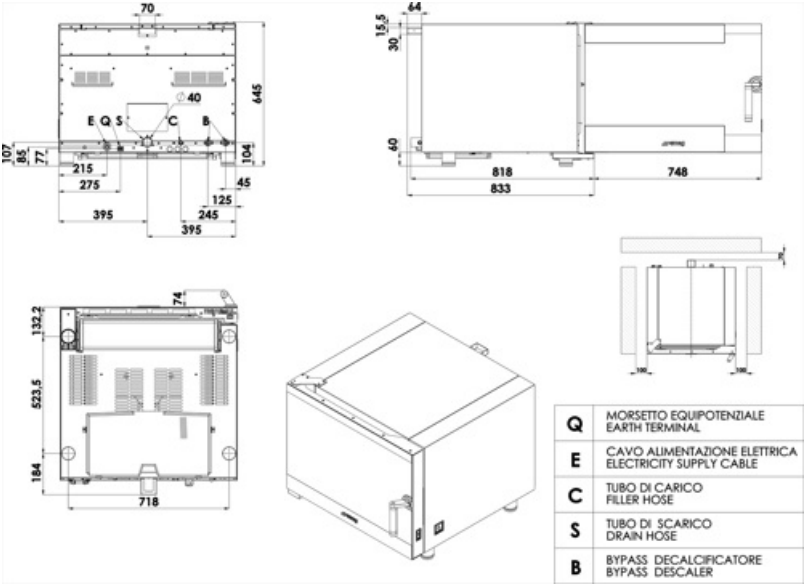

## Acessórios Compatíveis



**3743**




**3751**

Flat perforated aluminium tray (4pcs)



**3805**

Kit of 4 chrome-plated wire grids EN 600x400 mm



**3810**

**CLB45LSE**

Flow meter for filter FB45LSE1100




**FB45LSE1100**

Water treatment filter for Galileo Professional oven; 7.907 litres capacity with 10 Kh hardness and bypass set 1


**G11T**

Non-stick GN1/1 tray



**G11X8P**

8 vertical GN1/1 chicken grid




**KITSTCK55**

Conjunction kit between 2 stacked Galileo ovens (SPO4 or SPO5)




**R4EN6040**

Galileo Professional oven tray support kit for 4 EN 600x400 mm trays



**SLFT**

Upper and lower shelf kit for Galileo Professional oven support tables STDH and STDH



**STDH**

Galileo Professional oven support with 8-shelf tray holder for GN 1/1 and EN 600x400 mm trays



**STDH**

Galileo Professional oven support with 4-shelf tray holder



**T11TH20**

GN1/1 non-stick tray, 20 mm height




**TB45LSE**




**TF11XH2**

GN 1/1 perforated aluminium tray, 20 mm height














**TMF11TH2**

GN 1/1 non-sticking microperforated tray, 20 mm height



## Symbols glossary

	Elétrico: a fonte de energia do forno é a eletricidade.		Fan speed adjustable between 50 and 100% of the speed
	Fan forced heating		Core probe baking by temperature difference ( $\Delta t$ )
	Automatic washing		Barbecue: aquecimento seco para grelhados perfeitos.
	Steam generated by injectiong water into the fan and evaporation on the heating element		Saturated steam created by boiling in the cavity
	Steam and hot air combined cooking		Sous-vide baixa temperatura
	Humidity and heat controlled proving		

---

## Benefit (TT)

---

### Hinged opening

Easily accessible glass for effortless maintenance and cleaning

The glass panels are designed to be easily accessible and inspectable, ensuring great convenience during cleaning and maintenance operations. This feature significantly simplifies the process, making it quick and efficient, while ensuring that every intervention can be carried out with maximum comfort and complete safety.

### WashArt System

Efficient washing, optimised consumption, and minimal space usage

The WashArt washing system, equipped with a rotating nozzle, ensures even distribution of water and detergent within the cavity, providing deep cleaning and quick drying. To meet every need, four washing programmes are available: Short, Medium, Long, and Grill, along with a dedicated rinse programme. Thanks to its advanced technology, WashArt optimises efficiency and reduces consumption, while the rotating nozzle, with its compact design, minimises space usage in the cooking chamber.

### Fan speed

Precise fan speed modulation for consistently even cooking results

In the Galileo Professional ovens, the fan speed can be adjusted from a minimum of 50% to a maximum of 100%, in 5% increments. This feature allows for precise customisation of the airflow, perfectly adapting it to the specific needs of each preparation. Thanks to this versatility, it is possible to achieve flawless cooking results, ensuring even and accurate heat distribution. Moreover, precisely adjusting the fan speed helps preserve the delicacy of sensitive foods, preventing exposure to excessive heat and creating the ideal conditions to maintain their lightness and internal structure.

### Core probe

Multipoint cooking sensor for precise and uniform results

Optimal precision and control thanks to the four temperature measurement points, ensuring an accurate reading at every stage of cooking. The advanced sensor precisely detects the heat at the core of the food, guaranteeing the ideal cooking level for consistently perfect and uniform results.

### SteamArt Technology

Open Boiler system to generate steam directly within the cavity, in quick times and at very low temperatures

Thanks to the innovative Open Boiler system, steam is generated directly within the cavity, in very short times and at very low temperatures (starting from 30°C, ideal for supporting the proofing phase). This system is particularly suited for delicate cooking processes that require the use of 100% steam, ensuring even and gentle cooking that preserves the nutritional properties, taste, and texture of the food.

## **8 cooking stages**

Flexibility and precision in every cooking stage

The ability to set multiple cooking phases, in addition to preheating and keeping warm, gives the combi-steam oven exceptional versatility, responding precisely to the diverse needs of every preparation. Each phase of the cooking process can be customised with great accuracy, optimising results whether it's slow cooking at low temperatures or achieving a perfect final browning. Thanks to the advanced control of steam and heat parameters, it is possible to achieve even cooking on every surface, significantly enhancing the quality of the finished product and ensuring flawless results.

## **3lt retractable tank**

Retractable tank with intelligent detergent level monitoring

The oven is equipped with a practical 3-litre retractable container for liquid detergent, designed to simplify and speed up cleaning operations. Thanks to this tank, up to 45 washes can be carried out before a refill is needed. The detergent level is always monitored via the "detergent level" bar displayed on the screen, which uses three intuitive colours: green to indicate a full tank, yellow for an intermediate level, and red to alert when a refill is required.