

SRV564GH3



Product Family	Hob
Built-in type	Traditional
Dimensions	60 cm
Power supply	Gas
Type	Gas
EAN code	8017709112226



Aesthetics



Aesthetic	Contemporânea
Colour	Stainless steel
Acabamento	Satin
Material	Stainless Steel
Type of steel	Brushed
Pan stands	Cast iron
Pan Stand Coating	No
Burner Coating	No
Type of control setting	Control knobs
Control knob position	Front
No. of controls	4
Controls colour	Silver
Illuminated control knobs	No
Control knob protection	No
Serigraphy colour	Grey

Program / Functions

No. of gas cook zones	4
Total no. of cook zones	4

Options



Corte padrão	478-482x555-560 mm
--------------	--------------------

Technical Features

UR

Front-left - Gas - AUX - 1.10 kW

Rear-left - Gas - UR - 3.30 kW

Rear-right - Gas - Semi Rapid - 1.70 kW

Front-right - Gas - Semi Rapid - 1.70 kW

Gas safety valves Yes

Automatic Ignition

Yes

Electrical Connection

Plug No

Ficha elétrica

No

Comprimento do cabo de alimentação 120 cm

Gas Connection

Gas Type

G20 Natural gas

Other gas connections provided

Conical

Ligação ao gás


Ligação ao gás cilíndrica

Other gas nozzles included

G30 GPL Liquid gas

Gas connection rating (W)

7800 W

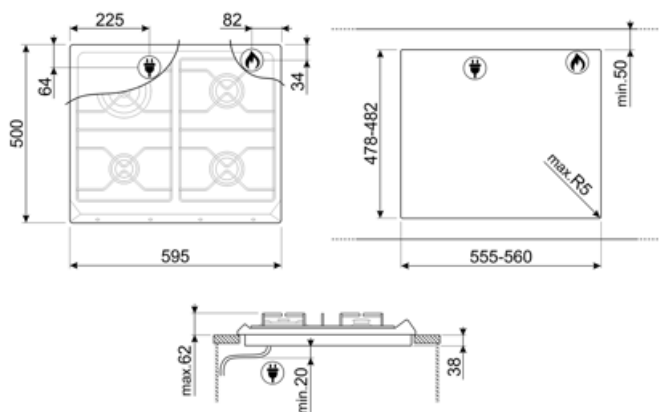

Compatible Accessories

6MP700AO

Conjunto de botões para placa - Cortina Antracito/Latão antigo



6MP700BS

Conjunto de botões para placa - Prata Cortina/Prata



6MP800P




BB3679

Grelha de ferro fundido



C60CNE-2

Tampa preta adequada para placas de 60 cm com controles frontais.



GGB60

Suporte de ferro fundido para painéis adequado para placas de 60 cm.



TPK

Placa grelhadora de aço inoxidável para cozinhar pratos Teppanyaki



6MP700AX

Conjunto de botões para placa - Cortina Antracito/Prata



6MP700PO

Conjunto de botões para placa - Creme Cortina/Latão velho




6MPF2465X

Conjunto de botões para placa - Seleção



C60CEB/1

Cobertura branca adequada para placas de 60 cm controles frontais.



C60CX/1

Tampa de vidro adequada para placas de 60 cm com controles frontais.



GRW

Suporte para wok



Symbols glossary



Instalação padrão: Instalação tradicional em tampo de mesa, adequado para qualquer conjunto de cozinha



Suportes de ferro fundido para serviço pesado: para máxima estabilidade e resistência.



CUT_OUT_STANDARD_72dpi



Queimadores ultrarrápidos: Queimadores ultrarrápidos potentes oferecem até 5kw de potência.



Controle dos botões

Benefit (TT)

Gas hobs

Consistent heat source control and easy, immediate temperature adjustment

Equipped with a thermocouple, the gas supply is cut off if the flame is extinguished for greater safety.

Inox

Maximum resistance even at high temperatures: the stainless steel surface ensures durability and deformation resistance, withstanding thermal shocks without damage

Cast iron

Solid and sturdy, easy to clean and maintain every day, thanks to the cast-iron pan supports—an emblem of long-lasting efficiency and durability.

Accurate power adjustment via knobs, for more precise cooking level control

Control knob position frontal

Instant and intuitive control thanks to front controls, easily accessible for practical use.

4 burners for every need: cook with precision and versatility thanks to different power levels, ideal for any pot and for managing multiple dishes simultaneously.

Gas safety valves

Automatic protection against gas leaks: the thermocouple stops gas flow in the absence of flame, ensuring a safe environment even during unexpected shutdowns.