

ST273CL



| | |
|-------------------|---------------------------|
| Product Family | Dishwashers |
| Commercial width | 60 cm |
| Commercial height | 82 cm |
| Installation | Fully-integrated built-in |
| Kitchen panel | Not supplied |
| N° baskets | 2 |
| EAN code | 8017709306847 |



Programme / Functions



| | | | |
|---------------------------|-------------------------------|-------------------|-----|
| N. of programmes | 10+1 | Auto sensor 45-65 | Yes |
| Washing temperatures | 38, 45, 50, 55, 65, 70, 75 °C | Mix | Yes |
| Soak | Yes | Quiet (~2 dB) | Yes |
| Express 27' | Yes | Intense | Yes |
| Crystal | Yes | Self clean | Yes |
| Full express - 60 minutes | Yes | Hygiene 99,9% | Yes |
| ECO | Yes | | |

Options



| | | | |
|--------------------|----------------|---------------------------|-----|
| Dry Assist+ option | Yes | 1/2 load FlexiZone option | Yes |
| Delay timer option | Up to 24 hours | Special programs option | Yes |

Baskets



| | | | |
|--------------------------|--------------------------------------|---------------------------------------|-----------------------|
| Basket colour | Grey | Largest loadable dish in upper basket | 25,0 cm |
| Basket components colour | Grey | Lower Basket | With 2 foldable racks |
| Handle | In plastic on upper and lower basket | Lower basket with anti-drip inserts | Yes |

| | | | |
|---------------------------------------|------------------------|---------------------------------------|---------|
| Upper Basket | With 1 foldable rack | Largest loadable dish in lower basket | 30,0 cm |
| Glass holder | Yes | Colour Inner Components | Green |
| Height adjustment of the upper basket | On three levels (5 cm) | Cutlery basket | Yes |

Technical Features



| | | | |
|-------------------------|---|---|---|
| Width (mm) | 598 mm | Water supply | Single; cold/hot water max. 60°C - energysave with hot water up to 35% |
| Depth (mm) | 545 mm | Max water hardness | 100°FH;58°dH |
| Display type | LED display (3 digit) | Drying system | Natural condenser drying, with Dry Assist + automatic door opening system at the end of the cycle |
| Product Height (mm) | 818 mm | Steam protection | In plastic |
| Controls | Electronic | Tub material | Stainless steel |
| Display | Delayed start, Programme time indicator | Filter | Stainless steel |
| Programme graphics | Symbols | Concealed heating element | Yes |
| On/off indicator | Yes | Hinges | Self balancing with fixed hinges |
| Salt light indicator | Light | Min. and max. frontal panel weight | 2 - 9 kg |
| Rinse aid indicator | Light | Min. and max plinth height | 100 - 228 mm |
| End of cycle indicator | ActiveLight | Adjustable feet | 7cm, from 820 to 890 mm |
| Washing system | Orbital | Back cover | Yes |
| Third spray arm | Single | Depth of dishwasher with open door (mm) | 1168 |
| Water softener | With electronic setting | Back feet adjustable from front | Yes |
| Turbidity sensor | Yes | Top cover | In plastic |
| Aquatest | | | |
| Flood protection system | Total Acquastop | | |

Performance / Energy Label NEW 2019




| | | | |
|---|------------|--|------------------|
| Energy Efficiency Class | C | Programme duration | 4:40 h:min |
| Energy consumption [per 100 cycles, based on the eco programme] | 73 KWh | Airborne acoustical noise emissions | 47 dB(A) re 1 pW |
| Rated capacity (ps) | 13 | Airborne acoustical noise emission class | C |
| Water consumption [per cycle] | 8.5 litres | Energy efficiency Index (EEI) | 43.8 |

Electrical Connection

| | | | |
|------|--------------|----------------|-------|
| Plug | (F;E) Schuko | Frequency (Hz) | 50 Hz |
|------|--------------|----------------|-------|

Connected power 1800 W
Current 10 A
Voltage 220-240 V

Type of connection Single-phase
Power supply cable length 140 cm

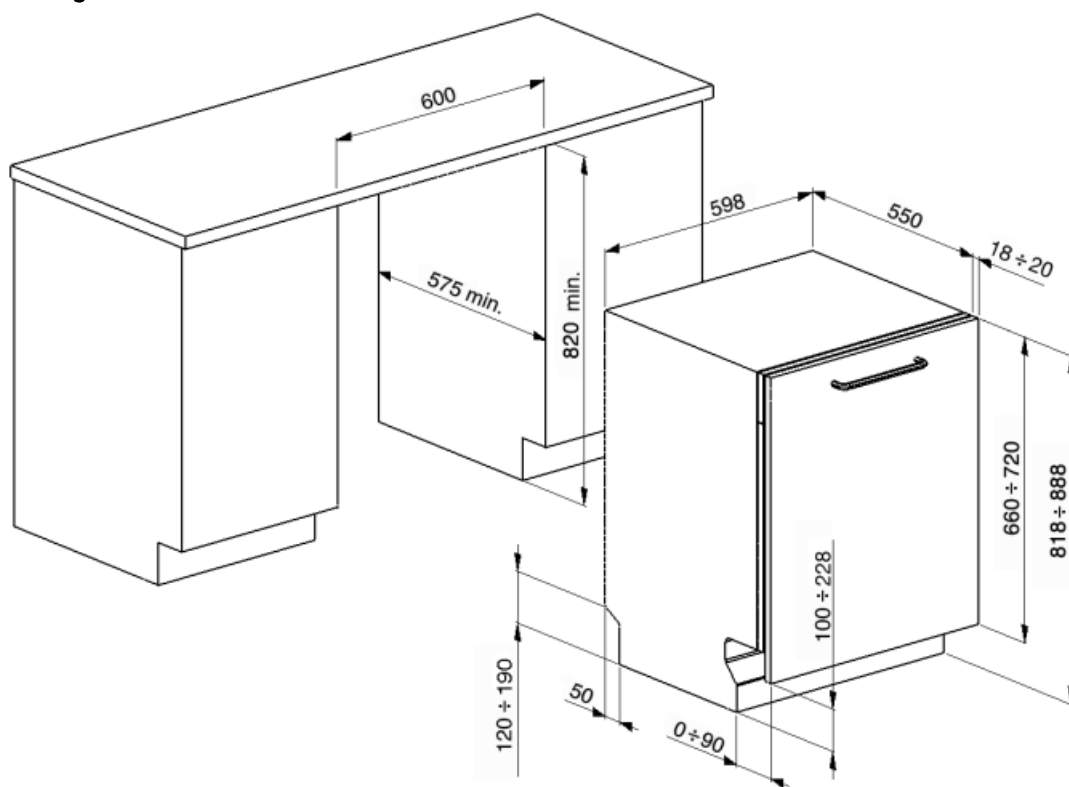

Not included accessories

KITPL60FABB



Toekick Kit in White colour with adjustable height. Can be fitted over all the fully integrated and underbench models with Fixed Fulcrum. Can be installed also on the models with variable fulcrum or flexifit hinges.

KITPL60FABX

Toekick Kit in Stainless Steel with adjustable height. Can be fitted over all the fully integrated and underbench models with Fixed Fulcrum. Can be installed also on the models with variable fulcrum or flexifit hinges.

KITPL60FABN

Toekick Kit in Black colour with adjustable height. Can be fitted over all the fully integrated and underbench models with Fixed Fulcrum. Can be installed also on the models with variable fulcrum or flexifit hinges.

KIT82CX




KITPLV2

Kit extension for dishwasher and washing machine: lenght mt. 2



KITGH























Kit glass holder. It has to be fitted on the first basket but only if there are foldable racks



KIT82CN



Symbols glossary (TT)

| | | | |
|--|--|---|--|
|  | Activelight is an led light which projects a red spot onto the floor beneath the dishwasher when the appliance is in use. |  | The Aquatest sensor is an electronic sensor that measures the degree of water transparency at the end of the initial soaking phase. Based on the values measured, the sensor sets the most suitable programme, thus obtaining the best washing results with the minimum amount of water. |
|  | To improve the drying of dishes without leaving stains. |  | 82 cm high |
|  | Delay Timer: Option to postpone the start of the desired programme by up to 24 hours in order to programme the dishwasher to run at the desired time. |  | FlexiZone: The ½ load flexizone allows you to wash a reduced load saving energy, water and time and there are no restrictions on where the items are placed. |
|  | Noise Level: Excellent insulation and special devices keep noise to a minimum. |  | Orbital wash system distributes water evenly throughout the 60cm dishwasher cavity, directing water with precision to ensure an excellent wash. |
|  | Auto 45°- 65°: The auto programme regulates the length of a cycle depending on the need for a pre-wash and the number of rinses required. |  | Crystals: The Crystals programme is dedicated to delicate dishes such as glasses and china. |
|  | Eco: Eco, this economic wash programme uses a low amount of water and energy in order to provide the most environmentally friendly cleaning option. |  | Mix: The Mix programme is suitable for mixed crockery and everyday pots and pans, without any particular incrustation. |
|  | Soak programme: The soak programme provides a rinse to prevent dirt from drying. |  | Express 27': The Express 27' programme is a quick wash cycle, at low temperatures, for lightly soiled dishes. |
|  | Ultraclean: The Ultraclean option performs a final rinse at a high temperature of 70°C eliminating virtually all bacteria. |  | 13 place settings: Number of place settings. |
|  | Total Acquastop: In addition to the partial Acquastop protection present in all Smeg dishwashers, some models have an electronic device fitted to the water intake hose, which monitors water levels in the machine, detects leaks in the hose and switches off the water supply immediately when necessary. |  | System WaterSave ensures the best washing results with minimal water consumption depending on the model of dishwasher. |
|  | Quick wash cycle for normally soiled mixed loads such as dishes and pans, even with dried-on residues. Dishes are washed and dried in 60 minutes. |  | Dishwasher cleaning cycle. The cycle should be started with the machine empty, without dishes. It is recommended to run the program every 2-3 months, using special dishwasher detergents. |
|  | SILENT: Wash cycle suitable for normally soiled dishes, even with dried-on residues. Ensures maximum noise reduction and is therefore ideal if you wish to run it during the night. |  | Allows you to enable additional programs when selected together with any wash cycle. After having selected the required wash cycle, press the button (|



The Dry Assist + option, in addition to saving energy, ensures perfect drying of the dishes by opening the door automatically at the end of the washing cycle.



Energy efficiency class C



HYGIENE 99.9% High-temperature washing programme. The 75° rinse guarantees the removal of 99.9% of germs and bacteria.