

ST323PM



| | |
|-------------------|---------------------------|
| Product Family | Dishwashers |
| Width | 60 cm |
| Commercial height | 82 cm |
| Installation | Fully-integrated built-in |
| Kitchen panel | Not supplied |
| N° baskets | 3, FlexiDuo |
| Motor | Inverter 2.0 |
| Type | Semi professional |
| EAN code | 8017709307363 |



Programmes



| | | | |
|---------------------------|-----------------------|-------------------|-----|
| No. of programmes | 10+1 | Auto sensor 45-65 | Yes |
| Washing temperatures | 45, 50, 65, 70, 75 °C | Mix | Yes |
| Soak | Yes | Intense | Yes |
| Crystal | Yes | Self clean | Yes |
| Full express - 60 minutes | Yes | Hygiene 99,9% | Yes |
| ECO | Yes | Ultra Express | Yes |

Professional programs



| | | | |
|---------------|-----|------------------|-----|
| Ultra rapid | Yes | Full express PRO | Yes |
| Mix PRO | Yes | Crystal Pro | Yes |
| Intensive Pro | Yes | | |

Options



| | | | |
|---|-------------------------------------|----------------------------|-----|
| Dry Assist+ option | Yes | Professional option | Yes |
| Delay timer option | Up to 24 hours, with automatic soak | Intensive wash zone option | |
| 1/2 load FlexiZone option (varied distribution) | Yes | | |

Baskets



| | | | |
|--|--|--|-----------------------|
| Basket colour | Grey | Sliding Guides Extra Glide | Yes |
| Basket components colour | Grey | Largest loadable dish in upper basket | 19,0 cm |
| Handle | In plastic with stainless steel insert on upper and lower basket | Lower Basket | With 4 foldable racks |
| Upper Basket | With 3 foldable racks | Lower basket with anti-drip inserts | Yes |
| Glass holder | Yes | Largest loadable dish in lower basket | 30,0 cm |
| Height adjustment of the upper basket | On three levels | Colour Inner Components | Blue |

Technical Features



| | | | |
|----------------------------------|---|--|---|
| Width (mm) | 598 mm | Water supply | Single; cold/hot water max. 60°C - energysave with hot water up to 35% |
| Depth (mm) | 545 mm | Max water hardness | 100°FH;58°dH |
| Display type | 3 digit | Drying system | Natural condenser drying, with Dry Assist + automatic door opening system at the end of the cycle |
| Product Height (mm) | 818 mm | Steam protection | In plastic |
| Controls | Electronic | Tank material | Stainless steel |
| Display | Delayed start, Programme time indicator | Filter | Stainless steel |
| Programme graphics | Symbols | Concealed heating element | Yes |
| On/off indicator | Yes | Hinges | Self balancing, Sliding, FLEXIFIT |
| Salt light indicator | Light | Min. and max. frontal panel weight | 2 - 11 kg |
| Rinse aid indicator | Light | Min. and max plinth height | 50 - 215 mm |
| End of cycle indicator | ActiveLight | Adjustable feet | 7cm, from 820 to 890 mm |
| Auto switch-off | Yes | Additional gaskets | Yes, with stainless steel plate |
| Washing system | Planetarium | Back cover | Yes |
| Third spray arm | Single | Depth of dishwasher with open door (mm) | 1146 mm |
| Water softener | With electronic setting | Back feet adjustable from front | Yes |
| Turbidity sensor Aquatest | Yes | Top cover | In plastic |
| Flood protection system | Total Acquastop | | |


Performance / Energy Label



| | | | |
|--|-------------|---|------------------|
| Energy Efficiency Class (Washing cycle) | C | Programme duration | 4:25 h:min |
| Energy consumption [per 100 cycles, based on the eco programme] | 75 kWh | Airborne acoustical noise emissions (spinning phase) | 42 dB(A) re 1 pW |
| Rated capacity (ps) | 14 | Airborne acoustical noise emission class | B |
| Water consumption [per cycle] | 10.5 litres | Energy efficiency Index (EEI) (Washing cycle) | 43.8 |

Electrical Connection

| | | | |
|------------------------|-----------|----------------------------------|--------------|
| Connected power | 5450 W | Type of connection | Single-phase |
| Current | 32 A | Power supply cable length | 200 cm |
| Voltage | 220-240 V | Plug | No |
| Frequency (Hz) | 50 Hz | | |

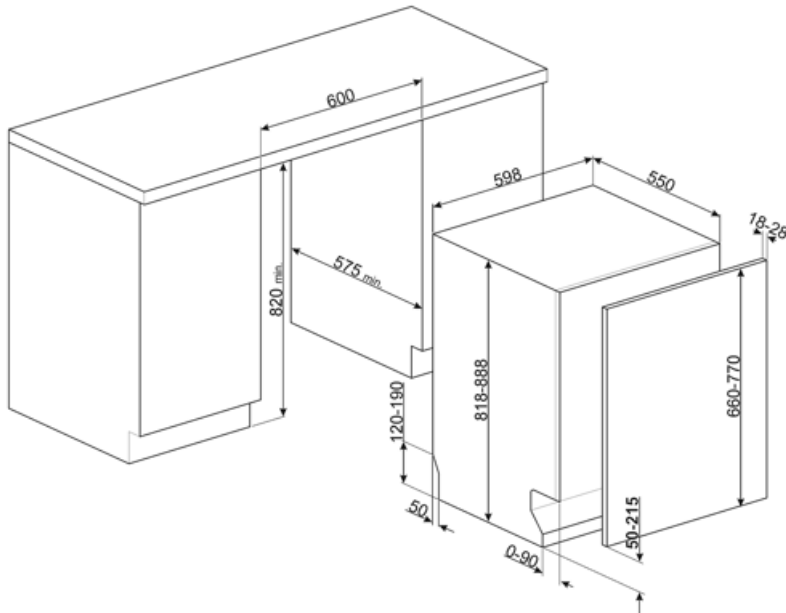

Compatible Accessories



KIT82CN



KIT82SPRAN



KIT82SPRX



KIT82CX



KIT82SPRMW



KITFLEXI

Kit for 60cm dishwashers with FlexiFit hinges for door panel weight >11 kg (max 15 kg 82 cm and 13,5 kg 86 cm)



KITGH

Kit glass holder. It has to be fitted on the first basket but only if there are foldable racks



KITPL60B

Toe-kick Kit in White colour with adjustable height and deepness. Can be installed over all the fully integrated and underbench models with variable fulcrum or flexifit hinges.



KITPL60N

Toe-kick Kit in Black colour with adjustable height and deepness. Can be installed over all the fully integrated and underbench models with variable fulcrum or flexifit hinges.



KITPL60X























Toe-kick Kit in Stainless Steel with adjustable height and deepness. Can be fitted over all the fully integrated and underbench models with variable fulcrum or flexifit hinges.



KITPLV2

Kit extension for dishwasher and washing machine: length mt. 2

Symbols glossary

| | | | |
|--|--|---|--|
|  | Activelight is an led light which projects a red spot onto the floor beneath the dishwasher when the appliance is in use. |  | Aquatest measures the clarity of the water during an auto program, and automatically ensures the minimum consumption of water and energy. |
|  | Anti-drip: Some models of dishwashers are equipped with special polymer nozzles anti-drip, that improve the process of drying. |  | COMM_HEIGHT_82_72dpi |
|  | Delay Timer: The delay timer can postpone the start of the program by up to 24 hours. |  | FlexiDuo: The FlexiDuo 3rd cutlery basket allows you to arrange cutlery or small cups, ladles, or bulky utensils however you like: it consists of two separate and moveable modules. |
|  | Models with new Flexi Fit hinges are able to be installed in kitchens with a plinth of just 5cms. With this new hinge design, the panel has a sliding movement from the bottom to the top, avoiding any possible interference of the panel with the plinth. |  | FlexiZone: The ½ load flexizone allows you to wash a reduced load saving energy, water and time and there are no restrictions on where the items are placed. |
|  | The new ExtraGlide guide system, available on top of the range models, makes the second basket even smoother and softer. In fact, it facilitates the extraction of the introduction, even at full load and, for the greater excursion, the insertion of crockery is also facilitated in the rear part. |  | Noise Level: Excellent insulation and special devices keep noise to a minimum. |
|  | Noise Level: Excellent insulation and special devices keep noise to a minimum. |  | PLANETARIUM_WASHING_SYSTEM_72dpi |
|  | Auto 45°- 65°: The auto programme regulates the length of a cycle depending on the need for a pre-wash and the number of rinses required. |  | Crystals: The Crystals programme is dedicated to delicate dishes such as glasses and china. |
|  | Eco: Eco, this economic wash programme uses a low amount of water and energy in order to provide the most environmentally friendly cleaning option. |  | IntensivoProf: The Intensive program is recommended for heavily soiled pots and pans and dry residues to be washed quickly. |
|  | Normal programme: The normal programme is suitable for normal degrees of dirt for everyday use. |  | Soak programme: The soak programme provides a rinse to prevent dirt from drying. |
|  | Ultra Rapid: The program is specifically for Ultra Fast wash very quickly (16 min.). Pots and pans very dirty, even with dried residues. |  | Ultraclean: The Ultraclean option performs a final rinse at a high temperature of 70°C eliminating virtually all bacteria. |
|  | Professional: Option Professional enables to convert household appliances into semiprofessional ones due to the programs which significantly reduce washing time to obtain an astonishing 16 minutes cycle. |  | Quick Time: The Quick Time option can reduce the length of the wash cycle up to 55%. |



The symbols show the number of plate settings of the dishwasher.



Total Acquastop: In addition to the partial Acquastop protection present in all Smeg dishwashers, some models have an electronic device fitted to the water intake hose, which monitors water levels in the machine, detects leaks in the hose and switches off the water supply immediately when necessary.



System WaterSave ensures the best washing results with minimal water consumption depending on the model of dishwasher.



Quick wash cycle for normally soiled mixed loads such as dishes and pans, even with dried-on residues. Dishes are washed and dried in 60 minutes.



Dishwasher cleaning cycle. The cycle should be started with the machine empty, without dishes. It is recommended to run the program every 2-3 months, using special dishwasher detergents.



Special quick program for washing glasses.



The Dry Assist + option, in addition to saving energy, ensures perfect drying of the dishes by opening the door automatically at the end of the wash cycle.



Energy efficiency class C



HYGIENE 99.9% High-temperature washing programme. The 75° rinse guarantees the removal of 99.9% of germs and bacteria, making it ideal for sanitising.



The work aimed at continuous improvement has allowed the creation of the second generation of the Inverter motor 2.0, characterised by greater efficiency and durability over time, which allows very high performance and a lower energy consumption and noise level.



Benefit

FlexiZone half-load option

Save water and energy with the FlexiZone Half Load option, which optimises wash performance by adjusting water and energy consumption when washing smaller loads.

Delay Start

Improved flexibility and convenience with the Delay Start option, which allows cycles to be scheduled up to 24 hours in advance.

Active Light

Active Light gives you clear control by projecting light onto the floor, so you always know when the dishwasher is running or when the cycle is complete

Smeg dishwashers equipped with ActiveLight signal the appliance's activity status by projecting a light on the floor while the cycle is running. The light goes out at the end of the cycle, signalling that the dishwasher can be unloaded.

FlexiDuo

For added convenience, the flexible third basket—FlexiDuo—adapts to accommodate various types of dishes, giving you extra space and better organisation with every load

The third FlexiDuo basket consists of two separate sections that can be handled independently of each other, stacked and/or removed, offering loading flexibility for every need. Depending on the arrangement, it allows cups, tall glasses, bulky utensils and pots and pans to be placed in the upper basket.

Planetarium Wash System

Smeg's unique Planetarium Wash System uses a specially designed spray arm to deliver full, deep cleaning coverage across every corner of the dishwasher

Smeg's patented Planetarium Wash System guarantees impeccable cleaning. With a simultaneous double movement of the sprayer and 65 rotations per minute, it reaches every nook and cranny for extraordinary results. Dishes, glasses and utensils will be perfectly clean in no time. An intelligent system where efficiency and style meet, delivering brilliant results effortlessly.

Turbidity sensor Aquatest

Enhanced energy efficiency and improved cleaning performance thanks to the AquaTest turbidity sensor, which detects water clarity and helps optimise the wash cycle

Flood protection system

Enhanced protection and peace of mind with Total Aqua Stop, an advanced leak detection system that automatically shuts off the water supply if a leak is detected beneath the drum or within the water intake hose.

Flexifit hinge system

The Flexifit hinge system ensures smooth door movement, allowing for seamless integration into your kitchen design

The height of the plinth can vary from 5 cm to 21.5 cm, allowing it to fit perfectly into the cabinet.

Thanks to this solution, the dishwasher blends harmoniously into its surroundings, with the door and plinth perfectly aligned with the other kitchen furniture.

Extra Glide Telescopic Guides

Smoother and more stable loading and unloading operations

Extra Glide telescopic guides ensure smooth and safe extraction of the upper basket, even with heavy loads. The telescopic design ensures smooth, stable and silent movement, improving ergonomics and convenience. Ideal for optimising space and ease of use, they combine durability and comfort in every washing operation.

DryAssist+

At the end of the cycle, the Dry Assist+ feature automatically opens the door to speed up drying and improve energy efficiency