

ST323PM

Reproduct Family Commercial width Commercial height Installation Kitchen panel N° baskets Motor Type EAN code

Dishwashers 60 cm 82 cm Fully-integrated built-in Not supplied 3, FlexiDuo Inverter 2.0 Semi professional 8017709307363



Programs

	45° 60 ECO AUTO	5° 🕫 过 🎰	
Ν.	of programmes	10+1	Auto sensor
W	ashing temperatures	45, 50, 65, 70, 75 °C	Mix
So	ak	Yes	Intense
Cr	ystal	Yes	Self clean
Fu	ll express - 60	Yes	Hygiene 99,9
mi	nutes		Ultra Expres
EC	0	Yes	

Yes
Yes

Professional programs

ĝ

Crystal Pro

Yes

Options



Dry Assist+ option Delay timer option 1/2 load FlexiZone option Yes Up to 24 hours Yes Professional option Intensive wash zone option

Yes

Baskets



Basket colour	Grey	Sliding Guides Extra Glide	Yes
Basket components	Grey		
colour		Largest loadable dish in	19,0 cm
Handle	In plastic with stainless steel insert on upper and lower basket With 3 foldable racks	upper basket	
		Lower Basket	With 4 foldable racks
		Lower basket with anti-	Yes
Upper Basket		drip inserts	
Glass holder	Yes	Largest loadable dish in	30,0 cm
Height adjustment of	On three levels (5 cm)	lower basket	
the upper basket		Colour Inner Components	Blue

Technical Features



	/idth (mm) epth (mm)	598 mm 545 mm	Water supply	Single; cold/hot water max. 60°C - energysave with hot
D	isplay type	LED display (3 digit)		water up to 35%
Р	roduct Height (mm)	818 mm	Max water hardness	100°fH;58°dH
C	ontrols	Electronic	Drying system	Natural condenser drying,
D	isplay	Delayed start, Programme time indicator		with Dry Assist + automatic door opening system at the end of the cycle
Pı	rogramme graphics	Symbols	Steam protection	In plastic
-	n/off indicator	Yes	Tub material	Stainless steel
	alt light indicator	Light	Filter	Stainless steel
	inse aid indicator	Light	Concealed heating	Yes
End of cycle indicator Washing system Third spray arm		ActiveLight Planetarium Single	element	
			Hinges	Self balancing, Sliding, FLEXIFIT
W	ater softener	With electronic setting	Min. and max. frontal	2,5 - 11 kg
Т	urbidity sensor	Yes	panel weight	
Aquatest Flood protection system		n Total Acquastop	Min. and max plinth height	50 - 215 mm
			Adjustable feet	7 cm, from 820 to 890 mm
			Additional gaskets	Yes, with stainless steel plate
			Back cover	Yes
			Depth of dishwasher with open door (mm)	1146
			Back feet adjustable from front	Yes
			Top cover	In plastic

Performance / Energy Label - Reg. 2019




Energy Efficiency Class C



Energy consumption [per 100 cycles, based on the eco programme]	75 KWh	Airborne acoustical noise emissions	42 dB(A) re 1 pW
Rated capacity (ps)	14	Airborne acoustical noise emission class	В
Water consumption [per cycle]	10.5 litres	Energy efficiency Index (EEI)	43.8

Electrical Connection

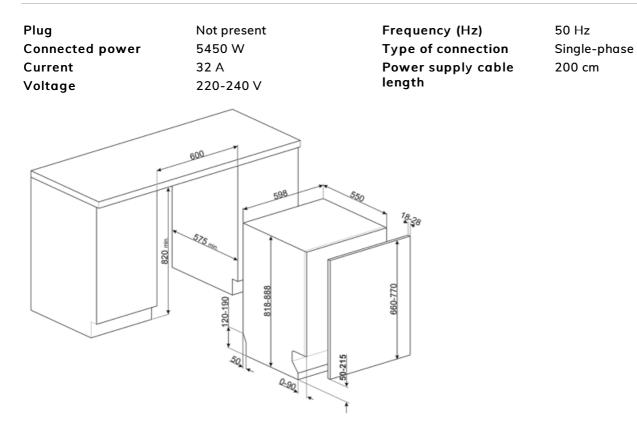



Compatible Accessories



KIT82CN



KIT82SPRAN



KIT82SPRX

KIT82CX

KIT82SPRMW

KITFLEXI

Kit for 60cm dishwashers with FlexiFit hinges for door panel weight >11 kg (max 15 kg 82 cm and 13,5 kg 86 cm)

KITPL60B

Toekick Kit in White colour with adjustable height and deepness. Can be installed over all the fully integrated and underbench models with variable fulcrum or flexifit hinges.

KITPL60X

Toekick Kit in Stainless Steel with adjustable height and deepness. Can be fitted over all the fully integrated and underbench models with variable fulcrum or flexifit hinges.



KITGH

Kit glass holder. It has to be fitted on the first basket but only if there are foldable racks

KITPL60N



Toekick Kit in Black colour with adjustable height and deepness. Can be installed over all the fully integrated and underbench models with variable fulcrum or flexifit hinges.

KITPLV2



Kit extension for dishwasher and washing machine: lenght mt. 2



Symbols glossary

ACTIVE LIGHT	Activelight is an led light which projects a red spot onto the floor beneath the dishwasher when the appliance is in use.	AGUATIST	The Aquatest sensor is an electronic sensor that measures the degree of water transparency at the end of the initial soaking phase. ased on the values measured, the sensor sets the most suitable programme, thus obtaining the best washing results with the minimum amount of water.
Ď	To improve the drying of dishes without leaving stains.	82 cm	82 cm high
$(\mathbf{\hat{y}})$	Delay Timer: Option to postpone the start of the desired programme by up to 24 hours in order to programme the dishwasher to run at the desired time.		FlexiDuo: The FlexiDuo 3rd cutlery basket allows you to arrange cutlery or small cups, ladles, or bulky utensils however you like: it consists of two separate and moveable modules.
FLEXI FIT	The FlexiFit hinges allow the kitchen panel to slide over the dishwasher door, allowing a minimum kitchen plinth height of 5 cm.		FlexiZone: The ½ load flexizone allows you to wash a reduced load saving energy, water and time and there are no restrictions on where the items are placed.
	The ExtraGlide guides system makes the second basket run even smoother and softer. It facilitates movement even when fully loaded, and thanks to the increased excursion, facilitates the insertion of dishes into the basket.	42dB	Noise Level: Excellent insulation and special devices keep noise to a minimum.
43 dB	Noise Level: Excellent insulation and special devices keep noise to a minimum.	Þ	The Planetarium washing system, with high rotations per minute, guarantees complete coverage of the tank, thanks to the simultaneous rotation of base and sprayers, and excellent washing results.
AUTO 45°-65°	Auto 45°- 65°: The auto programme regulates the length of a cycle depending on the need for a pre-wash and the number of rinses required.	Q _{45°}	Crystals: The Crystals programme is dedicated to delicate dishes such as glasses and china.
ECO 50°	Eco: Eco, this economic wash programme uses a low amount of water and energy in order to provide the most environmentally friendly cleaning option.	65°)))	Mix: The Mix programme is suitable for mixed crockery and everyday pots and pans, without any particular incrustation.
<u>۳</u>	Soak programme: The soak programme provides a rinse to prevent dirt from drying.	70°	Ultraclean: The Ultraclean option performs a final rinse at a high temperature of 70°c eliminating virtually all bacteria.
Ŷ	Professional: Option Professional enables to convert household appliances into semiprofessional ones due to the programs which significantly reduce washing time to obtain an astonishing 16 minutes cycle.	Ð	Quick Time: The Quick Time option can reduce the length of the wash cycle up to 55%.

•ss•smeg

ıÕı	14 place settings: Number of place settings.	We wanted	Total Acquastop: In addition to the partial Acquastop protection present in all Smeg dishwashers, some models have an electronic device fitted to the water intake hose, which monitors water levels in the machine, detects leaks in the hose and switches off the water supply immediately when necessary.
000 10,5lt	System WaterSave ensures the best washing results with minimal water consumption depending on the model of dishwasher.	60 min	Quick wash cycle for normally soiled mixed loads such as dishes and pans, even with dried-on residues. Dishes are washed and dried in 60 minutes.
	Dishwasher cleaning cycle. The cycle should be started with the machine empty, without dishes. It is recommended to run the program every 2-3 months, using special dishwasher detergents.	đ	Special quick program for washing glasses.
DRY	The Dry Assist + option, in addition to saving energy, ensures perfect drying of the dishes by opening the door automatically at the end of the washing cycle.	C	Energy efficiency class C
	HYGIENE 99.9% High-temperature washing programme. The 75° rinse guarantees the removal of 99.9% of germs and bacteria.	WYGATER 20	The work aimed at continuous improvement has allowed the creation of the second generation of the Inverter motor 2.0, characterised by greater efficiency and durability over time, which allows very high performance and a lower energy consumption and noise level.

8,7



Benefit (TT)

Active Light

Maximum control thanks to the light projected on the floor that indicates when the dishwasher is running and when the cycle is complete

Smeg dishwashers equipped with ActiveLight signal the appliance's activity status by projecting a light on the floor while the cycle is running. The light goes out at the end of the cycle, signalling that the dishwasher can be unloaded.

FlexiDuo

The flexible third basket provides additional space, adapting to the load to accommodate various types of dishes, ensuring optimal organization and efficient use of interior capacity

The third FlexiDuo basket consists of two separate sections that can be handled independently of each other, stacked and/or removed, offering loading flexibility for every need. Depending on the arrangement, it allows cups, tall glasses, bulky utensils and pots and pans to be placed in the upper basket.

Planetarium Wash System

Full and deep wash coverage thanks to the advanced movement of the spray arm, an innovation patented by Smeg

Smeg's patented Planetarium Wash System guarantees impeccable cleaning. With a simultaneous double movement of the sprayer and 65 rotations per minute, it reaches every nook and cranny for extraordinary results. Dishes, glasses and utensils will be perfectly clean in no time. An intelligent system where efficiency and style meet, delivering brilliant results effortlessly.

Flexifit hinge system

Smooth-running door for optimal integration into the kitchen deisgn

The height of the plinth can vary from 5 cm to 21.5 cm, allowing it to fit perfectly into the cabinet. Thanks to this solution, the dishwasher blends harmoniously into its surroundings, with the door and plinth perfectly aligned with the other kitchen furniture.

Extra Glide Telescopic Guides

Smoother and more stable loading and unloading operations

Extra Glide telescopic guides ensure smooth and safe extraction of the upper basket, even with heavy loads. The telescopic design ensures smooth, stable and silent movement, improving ergonomics and convenience. Ideal for optimising space and ease of use, they combine durability and comfort in every washing operation.

DryAssist+

The Dry Assist+ system of automatic door opening at the end of the cycle ensures fast and energy-efficient drying