

ST323PM







Product Family Dishwashers Commercial width 60 cm Commercial height 82 cm

Installation Fully-integrated built-in

Kitchen panel Not supplied N° baskets 3, FlexiDuo Motor Inverter 2.0 Type Semi professional **EAN** code 8017709307363



Programme / Functions























N. of programmes 10+1 Washing temperatures 45, 50, 65, 70, 75 °C Soak Crystal Yes Crystal Pro Yes Full express - 60 Yes minutes **ECO** Yes

Auto sensor 45-65 Yes Mix Yes Intense Yes Self clean Yes Hygiene 99,9% Yes **Ultra Express** Yes

Options









Dry Assist+ option **Delay timer option**

Up to 24 hours

1/2 load FlexiZone option

Professional option

Baskets



colour



Basket colour Grey **Basket components**

Grey

Sliding Guides Extra

Yes

Yes

Yes

Glide

Largest loadable dish in 19,0 cm

upper basket

With 4 foldable racks Lower Basket



Handle

In plastic with stainless steel insert on upper and

lower basket

Upper Basket

Glass holder

Height adjustment of the upper basket

With 3 foldable racks

Yes

On three levels (5 cm)

Lower basket with anti- Yes

drip inserts

Largest loadable dish in 30,0 cm

lower basket

Colour Inner Components Blue

Technical Features











Width (mm) Depth (mm)

Display type

Product Height (mm) Controls

Display

Programme graphics On/off indicator Salt light indicator Rinse aid indicator End of cycle indicator

Light Light ActiveLight Washing system Planetarium Third spray arm Single

Water softener

Turbidity sensor

Aquatest

Flood protection system Total Acquastop

598 mm

545 mm

LED display (3 digit)

818 mm Electronic

Delayed start, Programme

time indicator

Symbols Yes

With electronic setting

Yes

Water supply

Single; cold/hot water max. 60°C - energysave with hot

> water up to 35% 100°fH:58°dH

Max water hardness

Drying system

Natural condenser drying, with Dry Assist + automatic door opening system at the

end of the cycle

Steam protection In plastic Tub material Stainless steel Filter Stainless steel

Concealed heating element

Hinges

Min. and max. frontal panel weight

Min. and max plinth

height

Adjustable feet

Self balancing, Sliding, **FLEXIFIT**

2,5 - 11 kg

Yes

50 - 215 mm

7cm, from 820 to 890 mm Yes, with stainless steel Additional gaskets plate

Yes 1146

Back cover Depth of dishwasher with open door (mm)

Back feet adjustable

from front Top cover

Yes

In plastic

Performance / Energy Label NEW 2019









Energy Efficiency Class

Energy consumption 75 KWh [per 100 cycles, based on the eco programme] Rated capacity (ps) 14

Water consumption [per 10,5 litres

cycle]

Programme duration Airborne acoustical

noise emissions Airborne acoustical noise emission class

Energy efficiency Index

(EEI)

4:25 h:min

42 dB(A) re 1 pW

В

43,8




Electrical Connection

Plug Not present
Connected power 5450 W
Current 32 A
Voltage 220-240 V

Frequency (Hz)
Type of connection
Power supply cable
length

50 Hz Single-phase 200 cm

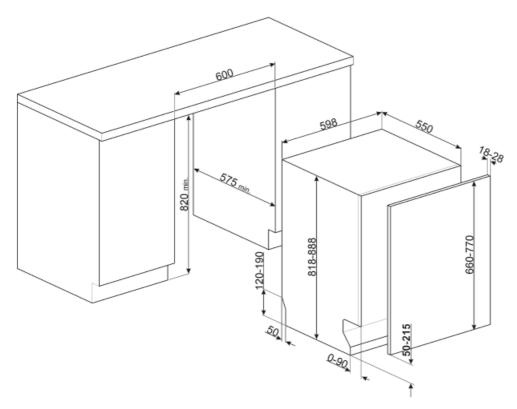



Not included accessories

KITPL60N



Toekick Kit in Black colour with adjustable height and deepness. Can be installed over all the fully integrated and underbench models with variable fulcrum or flexifit hinges.

KITPL60X



Toekick Kit in Stainless Steel with adjustable height and deepness. Can be fitted over all the fully integrated and underbench models with variable fulcrum or flexifit hinges.

KITFLEXI



Kit for 60cm dishwashers with FlexiFit hinges for door panel weight >11 kg (max 15 kg 82 cm and 13,5 kg 86 cm)

KITGH



Kit glass holder. It has to be fitted on the first basket but only if there are foldable racks

KIT82CX



KITPL60B

Toekick Kit in White colour with adjustable height and deepness. Can be installed over all the fully integrated and underbench models with variable fulcrum or flexifit hinges.

KITPLV2



Kit extension for dishwasher and washing machine: lenght mt. 2



KIT82CN



Symbols glossary (TT)



Activelight is an led light which projects a red spot onto the floor beneath the dishwasher when the appliance is in use.



The Aquatest sensor is an electronic sensor that measures the degree of water transparency at the end of the initial soaking phase. ased on the values measured, the sensor sets the most suitable programme, thus obtaining the best washing results with the minimum amount of water.



To improve the drying of dishes without leaving stains.



82 cm high



Delay Timer: Option to postpone the start of the desired programme by up to 24 hours in order to programme the dishwasher to run at the desired time.



FlexiDuo: The FlexiDuo 3rd cutlery basket allows you to arrange cutlery or small cups, ladles, or bulky utensils however you like: it consists of two separate and moveable modules.



The FlexiFit hinges allow the kitchen panel to slide over the dishwasher door, allowing a minimum kitchen plinth height of 5 cm.



FlexiZone: The ½ load flexizone allows you to wash a reduced load saving energy, water and time and there are no restrictions on where the items are placed.



The ExtraGlide guides system makes the second basket run even smoother and softer. It facilitates movement even when fully loaded, and thanks to the increased excursion, facilitates the insertion of dishes into the basket.



Noise Level: Excellent insulation and special devices keep noise to a minimum.



Noise Level: Excellent insulation and special devices keep noise to a minimum.



Energy efficiency class C



The Planetarium washing system, with high rotations per minute, guarantees complete coverage of the tank, thanks to the simultaneous rotation of base and sprayers, and excellent washing results.



Auto 45°- 65°: The auto programme regulates the length of a cycle depending on the need for a pre-wash and the number of rinses required.



Crystals: The Crystals programme is dedicated to delicate dishes such as glasses and china.



Eco: Eco, this economic wash programme uses a low amount of water and energy in order to provide the most environmentally friendly cleaning option.



Mix: The Mix programme is suitable for mixed crockery and everyday pots and pans, without any particular incrustation.



Soak programme: The soak programme provides a rinse to prevent dirt from drying.



Ultraclean: The Ultraclean option performs a final rinse at a high temperature of 70°c eliminating virtually all bacteria.



Professional: Option Professional enables to convert household appliances into semiprofessional ones due to the programs which significantly reduce washing time to obtain an astonishing 16 minutes cycle.



Quick Time: The Quick Time option can reduce the length of the wash cycle up to 55%.



14 place settings: Number of place settings.





Total Acquastop: In addition to the partial Acquastop protection present in all Smeg dishwashers, some models have an electronic device fitted to the water intake hose, which monitors water levels in the machine, detects leaks in the hose and switches off the water supply immediately when necessary.



System WaterSave ensures the best washing results with minimal water consumption depending on the model of dishwasher.



Quick wash cycle for normally soiled mixed loads such as dishes and pans, even with dried-on residues. Dishes are washed and dried in 60 minutes.



Dishwasher cleaning cycle. The cycle should be started with the machine empty, without dishes. It is recommended to run the program every 2-3 months, using special dishwasher detergents.



Special quick program for washing glasses.



The Dry Assist + option, in addition to saving energy, ensures perfect drying of the dishes by opening the door automatically at the end of the washing cycle.



HYGIENE 99.9% High-temperature washing programme. The 75° rinse guarantees the removal of 99.9% of germs and bacteria.



The work aimed at continuous improvement has allowed the creation of the second generation of the Inverter motor 2.0, characterised by greater efficiency and durability over time, which allows very high performance and a lower energy consumption and noise level.