

ST353BQL





Product Family Dishwashers Commercial width 60 cm Commercial height 82 cm

Installation Fully-integrated built-in

Kitchen panel Not supplied N° baskets 3, FlexiDuo EAN code 8017709306892



Programs























N. of programmes 10 + 1Washing temperatures 38, 45, 50, 55, 65, 70, 75 °C Soak Express 27' Yes Crystal Yes Full express - 60 Yes minutes **ECO**

Yes

Auto sensor 45-65 Yes Yes Quiet (-2 dB) Yes Intense Yes Self clean Yes Hygiene 99,9% Yes

Options









Dry Assist+ option **Delay timer option**

Up to 24 hours

1/2 load FlexiZone

Yes

option

Special programs option Yes

Baskets



Basket colour

Basket components

colour Handle Grey Grey Largest loadable dish in 19,0 cm upper basket

With 4 foldable racks

In plastic on upper and

lower basket

Lower basket with anti- Yes

drip inserts

Lower Basket



Upper Basket Glass holder

With 1 foldable rack

Yes

Height adjustment of the upper basket

On three levels (5 cm)

Largest loadable dish in 30,0 cm

lower basket

Colour Inner Components Green

Technical Features









Width (mm) Depth (mm)

Display type

Product Height (mm) 818 mm Controls Electronic

Delayed start, Programme Display

Programme graphics Symbols On/off indicator Yes Salt light indicator Light Rinse aid indicator Light End of cycle indicator Washing system Single

Third spray arm

Water softener

Turbidity sensor

Aquatest

Flood protection system Total Acquastop

598 mm

545 mm

LED display (3 digit)

time indicator

ActiveLight Planetarium

With electronic setting

Yes

Water supply

Single; cold/hot water max. 60°C - energysave with hot

> water up to 35% 100°fH;58°dH

Max water hardness Drying system

Natural condenser drying, with Dry Assist + automatic door opening system at the

end of the cycle

Steam protection In plastic **Tub material** Stainless steel Filter Stainless steel

Concealed heating element

Hinges

Self balancing with fixed

100 - 228 mm

hinges 2 - 9 kg

Yes

Min. and max. frontal

panel weight

Min. and max plinth

height

Adjustable feet 7 cm, from 820 to 890 mm

Back cover Depth of dishwasher with open door (mm)

Back feet adjustable

from front

Yes

Yes

1146 mm

Top cover In plastic

Performance / Energy Label - Reg. 2019









Energy Efficiency Class Energy consumption 64 kWh

[per 100 cycles, based on the eco programme]

Rated capacity (ps) 14 Water consumption [per 9.0 litres

cycle]

Programme duration

Airborne acoustical noise emissions

Airborne acoustical noise emission class

Energy efficiency Index

4:25 h:min

45 dB(A) re 1 pW

С

37.8

(EEI)

Electrical Connection

Connected power Current

1800 W 10 A

Type of connection

Single-phase




Voltage Frequency (Hz) 220-240 V 50 Hz

Power supply cable length

Plug

(F;E) Schuko

140 cm

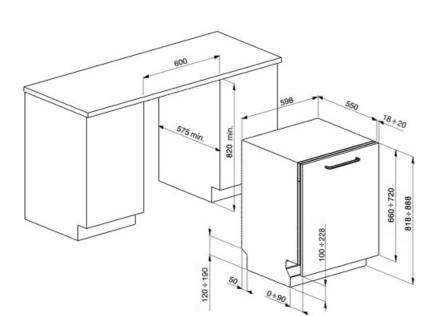



Compatible Accessories



KIT82CN



KIT82CX

KITGH



KIT82SPRAN



KIT82SPRMW



KIT82SPRX



Kit glass holder. It has to be fitted on the first basket but only if there are foldable racks



KITPL60FABB

Toekick Kit in White colour with adjustable height. Can be fitted over all the fully integrated and underbench models with Fixed Fulcrum. Can be installed also on the models with variable fulcrum or flexifit hinges.



KITPL60FABN

Toekick Kit in Black colour with adjustable height. Can be fitted over all the fully integrated and underbench models with Fixed Fulcrum. Can be installed also on the models with variable fulcrum or flexifit hinges.



KITPL60FABX

Toekick Kit in Stainless Steel with adjustable height. Can be fitted over all the fully integrated and underbench models with Fixed Fulcrum. Can be installed also on the models with variable fulcrum or flexifit hinges.



KITPLV2

Kit extension for dishwasher and washing machine: lenght mt. 2





Symbols glossary



Activelight is an led light which projects a red spot onto the floor beneath the dishwasher when the appliance is in use.



The Aquatest sensor is an electronic sensor that measures the degree of water transparency at the end of the initial soaking phase. ased on the values measured, the sensor sets the most suitable programme, thus obtaining the best washing results with the minimum amount of water.



To improve the drying of dishes without leaving stains.



82 cm high



Delay Timer: Option to postpone the start of the desired programme by up to 24 hours in order to programme the dishwasher to run at the desired time.



FlexiDuo: The FlexiDuo 3rd cutlery basket allows you to arrange cutlery or small cups, ladles, or bulky utensils however you like: it consists of two separate and moveable modules.



FlexiZone: The ½ load flexizone allows you to wash a reduced load saving energy, water and time and there are no restrictions on where the items are placed.



Noise Level: Excellent insulation and special devices keep noise to a minimum.



The Planetarium washing system, with high rotations per minute, guarantees complete coverage of the tank, thanks to the simultaneous rotation of base and sprayers, and excellent washing results.



Auto 45°- 65°: The auto programme regulates the length of a cycle depending on the need for a pre-wash and the number of rinses required.



Crystals: The Crystals programme is dedicated to delicate dishes such as glasses and china.



Eco: Eco, this economic wash programme uses a low amount of water and energy in order to provide the most environmentally friendly cleaning option.



Mix: The Mix programme is suitable for mixed crockery and everyday pots and pans, without any particular incrustation.



Soak programme: The soak programme provides a rinse to prevent dirt from drying.



Express 27': The Express 27' programme is a quick wash cycle, at low temperatures, for lightly soiled dishes.



Ultraclean: The Ultraclean option performs a final rinse at a high temperature of 70°c eliminating virtually all bacteria.



14 place settings: Number of place settings.



Total Acquastop: In addition to the partial Acquastop protection present in all Smeg dishwashers, some models have an electronic device fitted to the water intake hose, which monitors water levels in the machine, detects leaks in the hose and switches off the water supply immediately when necessary.



System WaterSave ensures the best washing results with minimal water consumption depending on the model of dishwasher.



Quick wash cycle for normally soiled mixed loads such as dishes and pans, even with dried-on residues. Dishes are washed and dried in 60 minutes.





Dishwasher cleaning cycle. The cycle should be started with the machine empty, without dishes. It is recommended to run the program every 2-3 months, using special dishwasher detergents.



Allows you to enable additional programs when selected together with any wash cycle. After having selected the required wash cycle, press the button (



Energy efficiency class B



The work aimed at continuous improvement has allowed the creation of the second generation of the Inverter motor 2.0, characterised by greater efficiency and durability over time, which allows very high performance and a lower energy consumption and noise level.



SILENT: Wash cycle suitable for normally soiled dishes, even with dried-on residues. Ensures maximum noise reduction and is therefore ideal if you wish to run it during the night.



The Dry Assist + option, in addition to saving energy, ensures perfect drying of the dishes by opening the door automatically at the end of the washing cycle.



HYGIENE 99.9% High-temperature washing programme. The 75° rinse guarantees the removal of 99.9% of germs and bacteria.