

ST382C



Product Family Dishwashers Commercial width 60 cm Commercial height 82 cm

Installation Fully-integrated built-in

Kitchen panel Not supplied N° baskets 3, Flexi

8017709306861 EAN code



Programs

























N. of programmes 10 + 1Yes Washing temperatures 38, 45, 50, 55, 65, 70, 75 °C Quiet (-2 dB) Yes Soak Intense Yes Self clean Express 27' Yes Yes Hygiene 99,9% Crystal Yes Yes Full express - 60 Yes **Delicate** Yes minutes **ECO** Yes

Options









Dry Assist+ option **Delay timer option**

Up to 24 hours

Yes

1/2 load FlexiZone

Yes

option

Special programs option Yes

Baskets



Basket colour **Basket components**

colour

Handle

Grey

Grey

In plastic on upper and

lower basket

Largest loadable dish in 19,0 cm

upper basket

With 2 foldable racks Lower Basket

Lower basket with anti- Yes

drip inserts



Upper Basket Glass holder

With central fixed racks

Yes

598 mm

Height adjustment of the upper basket

On three levels (5 cm)

Largest loadable dish in 30,0 cm

lower basket

Colour Inner Components Green

Technical Features



Width (mm) Depth (mm)

545 mm Display type LED display Product Height (mm) 818 mm Controls Electronic

Display

Delayed start, Programme time indicator Programme graphics Symbols

Salt light indicator Light Rinse aid indicator Light

End of cycle indicator Acoustic signal Washing system Standard Third spray arm Single With electronic setting

Water softener Flood protection system Total Acquastop

Water supply

Single; cold/hot water max. 60°C - energysave with hot

water up to 35%

Max water hardness

Drying system

Steam protection Tub material Filter

Concealed heating element

Hinges

Min. and max. frontal panel weight

Min. and max plinth

height

Adjustable feet

Back cover Depth of dishwasher with open door (mm)

Back feet adjustable

from front

Top cover

100°fH;58°dH

Natural condenser drying,

with Dry Assist + automatic door opening system at the

end of the cycle

In plastic Stainless steel Stainless steel

Yes

Self balancing with fixed

hinges

2 - 9 kg

100 - 228 mm

7cm, from 820 to 890 mm

Yes 1146

Yes

In plastic

Performance / Energy Label - Reg. 2019









Energy Efficiency Class Energy consumption [per 100 cycles, based on the eco programme]

Rated capacity (ps) Water consumption [per 12,0 litres

cycle]

Voltage

C **73 KWh**

13

Programme duration

Airborne acoustical noise emissions Airborne acoustical noise emission class

Energy efficiency Index

(EEI)

4:10 h:min

48 dB(A) re 1 pW

С

43,8

Electrical Connection

Plug Connected power Current


1800 W 10 A 220-240 V

(F;E) Schuko

Frequency (Hz) Type of connection Power supply cable length

50 Hz Single-phase 140 cm



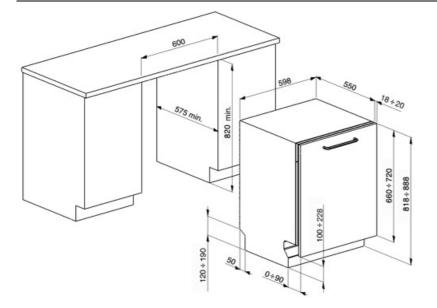



Compatible Accessories



KIT82CN



KIT82CX



KITGH

Kit glass holder. It has to be fitted on the first basket but only if there are foldable



KITPL60FABB

Toekick Kit in White colour with adjustable height. Can be fitted over all the fully integrated and underbench models with Fixed Fulcrum. Can be installed also on the models with variable fulcrum or flexifit hinges.




Toekick Kit in Black colour with adjustable height. Can be fitted over all the fully integrated and underbench models with Fixed Fulcrum. Can be installed also on the models with variable fulcrum or flexifit hinges.



KITPL60FABX

Toekick Kit in Stainless Steel with adjustable height. Can be fitted over all the fully integrated and underbench models with Fixed Fulcrum. Can be installed also on the models with variable fulcrum or flexifit hinges.









Symbols glossary



To improve the drying of dishes without leaving stains.



82 cm high



Delay Timer: Option to postpone the start of the desired programme by up to 24 hours in order to programme the dishwasher to run at the desired time



FlexiZone: The ½ load flexizone allows you to wash a reduced load saving energy, water and time and there are no restrictions on where the items are placed.



Noise Level: Excellent insulation and special devices keep noise to a minimum.



Crystals: The Crystals programme is dedicated to delicate dishes such as glasses and china.



Delicate: Delicate washing program is designed for delicate dishes which are not heavily soiled.



Eco: Eco, this economic wash programme uses a low amount of water and energy in order to provide the most environmentally friendly cleaning option.



Mix: The Mix programme is suitable for mixed crockery and everyday pots and pans, without any particular incrustation.



Soak programme: The soak programme provides a rinse to prevent dirt from drying.



Express 27': The Express 27' programme is a quick wash cycle, at low temperatures, for lightly soiled dishes.



Ultraclean: The Ultraclean option performs a final rinse at a high temperature of 70°c eliminating virtually all bacteria.



13 place settings: Number of place settings.



Total Acquastop: In addition to the partial Acquastop protection present in all Smeg dishwashers, some models have an electronic device fitted to the water intake hose, which monitors water levels in the machine, detects leaks in the hose and switches off the water supply immediately when necessary.



System WaterSave ensures the best washing results with minimal water consumption depending on the model of dishwasher.



Quick wash cycle for normally soiled mixed loads such as dishes and pans, even with dried-on residues. Dishes are washed and dried in 60 minutes.



Dishwasher cleaning cycle. The cycle should be started with the machine empty, without dishes. It is recommended to run the program every 2-3 months, using special dishwasher detergents.



SILENT: Wash cycle suitable for normally soiled dishes, even with dried-on residues. Ensures maximum noise reduction and is therefore ideal if you wish to run it during the night.



Allows you to enable additional programs when selected together with any wash cycle. After having selected the required wash cycle, press the button (



The Dry Assist + option, in addition to saving energy, ensures perfect drying of the dishes by opening the door automatically at the end of the washing cycle.



Energy efficiency class C



HYGIENE 99.9% High-temperature washing programme. The 75° rinse guarantees the removal of 99.9% of germs and bacteria.





The work aimed at continuous improvement has allowed the creation of the second generation of the Inverter motor 2.0, characterised by greater efficiency and durability over time, which allows very high performance and a lower energy consumption and noise level.



Benefit (TT)

DryAssist+

The Dry Assist+ system of automatic door opening at the end of the cycle ensures fast and energy-efficient drying