

ST4533IN



Product Family Dishwashers
Commercial width 45 cm
Commercial height 82 cm

Installation Fully-integrated built-in

Kitchen panel Not supplied N° baskets 3, Flexi

EAN code 8017709302924



Yes

Programs

















N. of programmes 8
Washing temperatures 50, 60 °C
Soak Yes
Full express - 60 Yes
minutes

Yes

MixYesSelf cleanYesIntense 60°YesAuto 50°-60°Yes

ECO

Options

Express 50°











Delay timer optionUp to 24 hoursCrystal optionYesExtreme optionYesSterilise optionYes

Baskets



Basket colour Grey Largest loadable dish in 14,0 cm

Basket components Grey upper basket

colour Lower Basket With 2 foldable racks

Handle In plastic on upper and Lower basket with anti- Yes

lower basket drip inserts

Upper Basket With central fixed racks Largest loadable dish in 31,5 cm

Glass holder Yes lower basket

Height adjustment of On two levels (4 cm) Colour Inner Components

Grey
Components



Technical Features











Width (mm) 446 mm Depth (mm) 550 mm

LED display (3 digit) Display type

FLEXI

Product Height (mm) 818 mm

Electronic touch control Controls Display Delayed start, Programme

time indicator, Consumptions

Programme graphics Symbols On/off indicator Salt light indicator Light Rinse aid indicator Light End of cycle indicator ActiveLight Washing system Standard

Water softener With electronic setting

Yes

Turbidity sensor

Aquatest

Flood protection system Total Acquastop

Water supply

Single; cold/hot water max. 60°C - energysave with hot

water up to 35%

Max water hardness 90°fH; 50°dH

Drying system Natural condenser drying, with Dry Assist automatic

> door opening system at the end of the cycle

Steam protection In plastic Tub material Stainless steel Filter Stainless steel

Concealed heating

element

Hinges Self balancing, Sliding,

> **FLEXIFIT** 2 - 7,5 kg

Yes

Min. and max. frontal

panel weight

Min. and max plinth

height

Can be installed in-

column

Adjustable feet Additional gaskets

Depth of dishwasher with open door (mm)

Back feet adjustable

from front

Yes, with siphon

40 - 175 mm

6 cm, from 820 to 880 mm

Yes 1200 mm

Yes

Performance / Energy Label - Reg. 2019









Energy Efficiency Class D **Energy consumption** 67 kWh [per 100 cycles, based

on the eco programme] Rated capacity (ps) 10

Water consumption [per 9,9 litres

cycle]

Programme duration Airborne acoustical noise emissions

Airborne acoustical noise emission class

Energy efficiency Index

(EEI)

4:00 h:min

44 dB(A) re 1 pW

В

49,9

Electrical Connection

Connected power 1950 W Current 10 A 220-240 V Voltage Frequency (Hz) 50 Hz


Type of connection Power supply cable

length

Single-phase 150 cm

Plug (F;E) Schuko



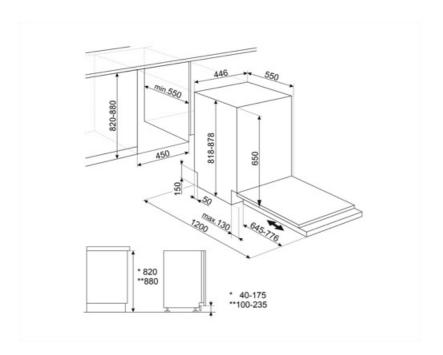



Compatible Accessories

KITPLV2

Kit extension for dishwasher and washing machine: lenght mt. 2





Symbols glossary



Activelight is an led light which projects a red spot onto the floor beneath the dishwasher when the appliance is in use.



The Aquatest sensor is an electronic sensor that measures the degree of water transparency at the end of the initial soaking phase. ased on the values measured, the sensor sets the most suitable programme, thus obtaining the best washing results with the minimum amount of water.



To improve the drying of dishes without leaving stains.



Installation in column: Installation in column.



82 cm high



Delay Timer: Option to postpone the start of the desired programme by up to 24 hours in order to programme the dishwasher to run at the desired time



The FlexiFit hinges allow the kitchen panel to slide over the dishwasher door, allowing a minimum kitchen plinth height of 5 cm.



Smeg's evolution towards more intelligent and eco-friendly models has led to the choice of Inverter technology, which significantly reduces consumption.



Noise Level: Excellent insulation and special devices keep noise to a minimum.



Eco: Eco, this economic wash programme uses a low amount of water and energy in order to provide the most environmentally friendly cleaning option.



Mix: The Mix programme is suitable for mixed crockery and everyday pots and pans, without any particular incrustation.



Soak programme: The soak programme provides a rinse to prevent dirt from drying.



10 place settings: Number of place settings.



Total Acquastop: In addition to the partial Acquastop protection present in all Smeg dishwashers, some models have an electronic device fitted to the water intake hose, which monitors water levels in the machine, detects leaks in the hose and switches off the water supply immediately when necessary.



Touch controls: Easy to use touch controls allow the appliance to be programmed at the touch of a button.



A quick programme suitable for washing a load with fresh and light soil.



Quick wash cycle for normally soiled mixed loads such as dishes and pans, even with dried-on residues. Dishes are washed and dried in 60 minutes.



Dishwasher cleaning cycle. The cycle should be started with the machine empty, without dishes. It is recommended to run the program every 2-3 months, using special dishwasher detergents.



Wash cycle for normally soiled mixed loads such as dishes and pans, even with dried-on residues. When this program is selected, the dishwasher recognises the type of dirt and automatically adjusts the washing parameters as appropriate.



This option provides special care for a delicate load. It prevents rapid changes in the wash temperature of the selected programme and reduces it to 4





Programme suitable for washing and drying heavily soiled items with encrusted residues.



Option which improves the washing results of the selected programme. It increases the wash temperature and duration.



Option which provides better cleaning results by keeping the temperature between 65 and 70°C for at least 10 minutes during the last rinsing phase.



Energy efficiency class D



System WaterSave ensures the best washing results with minimal water consumption depending on the model of dishwasher.



8,3