ST4533IN



Product Family	Dishwashers
Commercial width	45 cm
Commercial height	82 cm
Installation	Fully-integrated built-in
Kitchen panel	Not supplied
N° baskets	3, Flexi
EAN code	8017709302924

Programs

N. of programmes	8	**ECO**	Yes
Washing temperatures	50, 60 °C	**Mix**	Yes
Soak	Yes	**Self clean**	Yes
Full express - 60 minutes	Yes	**Intense 60°**	Yes
		Auto 50°-60°	Yes
Express 50°	Yes		

Options

Delay timer option	Up to 24 hours	**Crystal option**	Yes
Extreme option	Yes	**Sterilise option**	Yes

Baskets


Basket colour	Grey	**Largest loadable dish in upper basket**	14,0 cm
Basket components colour	Grey	**Lower Basket**	With 2 foldable racks
Handle	In plastic on upper and lower basket	**Lower basket with anti-drip inserts**	Yes
Upper Basket	With central fixed racks	**Largest loadable dish in lower basket**	31,5 cm
Glass holder	Yes		
Height adjustment of the upper basket	On two levels (4 cm)	**Colour Inner Components**	Grey

Technical Features



Width (mm)	446 mm
Depth (mm)	550 mm
Display type	LED display (3 digit)
Product Height (mm)	818 mm
Controls	Electronic touch control
Display	Delayed start, Programme time indicator, Consumptions
Programme graphics	Symbols
On/off indicator	Yes
Salt light indicator	Light
Rinse aid indicator	Light
End of cycle indicator	ActiveLight
Auto switch-off	Yes
Washing system	Standard
Water softener	With electronic setting
Turbidity sensor Aquatest	Yes
Flood protection system	Total Acquastop
Water supply	Single; cold/hot water max. 60°C - energysave with hot water up to 35%
Max water hardness	90°fH; 50°dH
Drying system	Natural condenser drying, with Dry Assist automatic door opening system at the end of the cycle
Steam protection	In plastic
Tub material	Stainless steel
Filter	Stainless steel
Concealed heating element	Yes
Hinges	Self balancing, Sliding, FLEXIFIT
Min. and max. frontal panel weight	2 - 7,5 kg
Min. and max plinth height	40 - 175 mm
Can be installed in-column	Yes, with siphon
Adjustable feet	6 cm, from 820 to 880 mm
Additional gaskets	Yes
Depth of dishwasher with open door (mm)	1200 mm
Back feet adjustable from front	Yes


Performance / Energy Label - Reg. 2019



Energy Efficiency Class	D
Energy consumption [per 100 cycles, based on the eco programme]	67 kWh
Rated capacity (ps)	10
Water consumption [per cycle]	9,9 litres
Programme duration	4:00 h:min
Airborne acoustical noise emissions	44 dB(A) re 1 pW
Airborne acoustical noise emission class	B
Energy efficiency Index (EEI)	49,9

Electrical Connection

Connected power	1950 W
Current	10 A
Voltage	220-240 V
Frequency (Hz)	50 Hz
Type of connection	Single-phase
Power supply cable length	150 cm
Plug	(F;E) Schuko

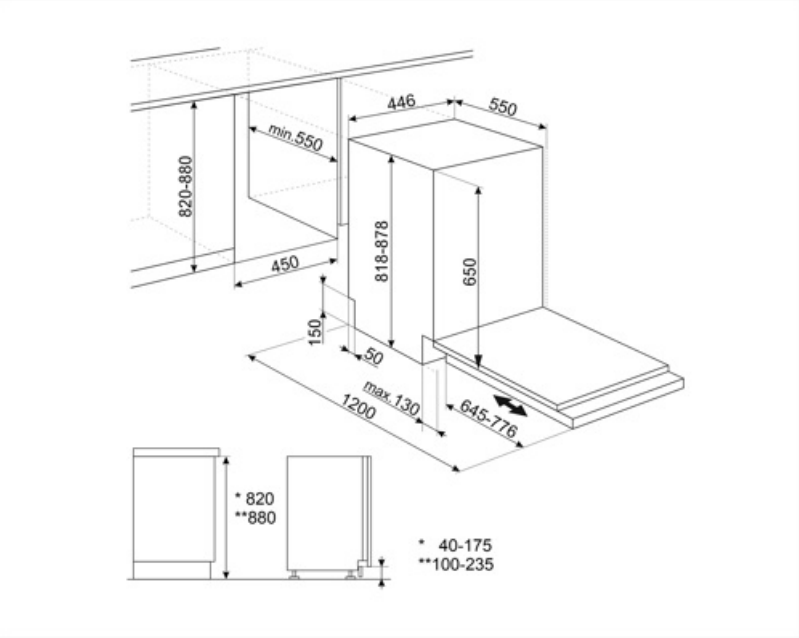
446
550
min.550
820-880
818-878
650
450
150
50
max.130
1200
645-776
* 820
**880
* 40-175
**100-235

Compatible Accessories



KITPLV2

Kit extension for dishwasher and washing machine: lenght mt. 2

Symbols glossary



Activelight is an led light which projects a red spot onto the floor beneath the dishwasher when the appliance is in use.



The Aquatest sensor is an electronic sensor that measures the degree of water transparency at the end of the initial soaking phase. ased on the values measured, the sensor sets the most suitable programme, thus obtaining the best washing results with the minimum amount of water.



To improve the drying of dishes without leaving stains.



Installation in column: Installation in column.



82 cm high



Delay Timer: Option to postpone the start of the desired programme by up to 24 hours in order to programme the dishwasher to run at the desired time.



The FlexiFit hinges allow the kitchen panel to slide over the dishwasher door, allowing a minimum kitchen plinth height of 5 cm.



Smeg's evolution towards more intelligent and eco-friendly models has led to the choice of Inverter technology, which significantly reduces consumption.



Noise Level: Excellent insulation and special devices keep noise to a minimum.



Eco: Eco, this economic wash programme uses a low amount of water and energy in order to provide the most environmentally friendly cleaning option.



Mix: The Mix programme is suitable for mixed crockery and everyday pots and pans, without any particular incrustation.



Soak programme: The soak programme provides a rinse to prevent dirt from drying.



10 place settings: Number of place settings.



Total Acquastop: In addition to the partial Acquastop protection present in all Smeg dishwashers, some models have an electronic device fitted to the water intake hose, which monitors water levels in the machine, detects leaks in the hose and switches off the water supply immediately when necessary.



Touch controls: Easy to use touch controls allow the appliance to be programmed at the touch of a button.



A quick programme suitable for washing a load with fresh and light soil.



Quick wash cycle for normally soiled mixed loads such as dishes and pans, even with dried-on residues. Dishes are washed and dried in 60 minutes.



Dishwasher cleaning cycle. The cycle should be started with the machine empty, without dishes. It is recommended to run the program every 2-3 months, using special dishwasher detergents.



Wash cycle for normally soiled mixed loads such as dishes and pans, even with dried-on residues. When this program is selected, the dishwasher recognises the type of dirt and automatically adjusts the washing parameters as appropriate.



This option provides special care for a delicate load. It prevents rapid changes in the wash temperature of the selected programme and reduces it to 4



Programme suitable for washing and drying heavily soiled items with encrusted residues.



Option which provides better cleaning results by keeping the temperature between 65 and 70°C for at least 10 minutes during the last rinsing phase.



System WaterSave ensures the best washing results with minimal water consumption depending on the model of dishwasher.





Option which improves the washing results of the selected programme. It increases the wash temperature and duration.



Energy efficiency class D

