

ST4533IN



| | |
|-------------------|---------------------------|
| Product Family | Dishwashers |
| Commercial width | 45 cm |
| Commercial height | 82 cm |
| Installation | Fully-integrated built-in |
| Kitchen panel | Not supplied |
| N° baskets | 3, Flexi |
| EAN code | 8017709302924 |




Programs



| | | | |
|---------------------------|-----------|--------------|-----|
| N. of programmes | 8 | ECO | Yes |
| Washing temperatures | 50, 60 °C | Mix | Yes |
| Soak | Yes | Self clean | Yes |
| Full express - 60 minutes | Yes | Intense 60° | Yes |
| Express 50° | Yes | Auto 50°-60° | Yes |

Options



| | | | |
|--------------------|----------------|------------------|-----|
| Delay timer option | Up to 24 hours | Crystal option | Yes |
| Extreme option | Yes | Sterilise option | Yes |

Baskets



| | | | |
|---------------------------------------|--------------------------------------|---------------------------------------|-----------------------|
| Basket colour | Grey | Largest loadable dish in upper basket | 14,0 cm |
| Basket components colour | Grey | Lower Basket | With 2 foldable racks |
| Handle | In plastic on upper and lower basket | Lower basket with anti-drip inserts | Yes |
| Upper Basket | With central fixed racks | Largest loadable dish in lower basket | 31,5 cm |
| Glass holder | Yes | Colour Inner Components | Grey |
| Height adjustment of the upper basket | On two levels (4 cm) | | |

Technical Features



| | | | |
|----------------------------------|---|--|---|
| Width (mm) | 446 mm | Water supply | Single; cold/hot water max. 60°C - energysave with hot water up to 35% |
| Depth (mm) | 550 mm | Max water hardness | 90°FH; 50°dH |
| Display type | LED display (3 digit) | Drying system | Natural condenser drying, with Dry Assist automatic door opening system at the end of the cycle |
| Product Height (mm) | 818 mm | Steam protection | In plastic |
| Controls | Electronic touch control | Tube material | Stainless steel |
| Display | Delayed start, Programme time indicator, Consumptions | Filter | Stainless steel |
| Programme graphics | Symbols | Concealed heating element | Yes |
| On/off indicator | Yes | Hinges | Self balancing, Sliding, FLEXIFIT |
| Salt light indicator | Light | Min. and max. frontal panel weight | 2 - 7,5 kg |
| Rinse aid indicator | Light | Min. and max plinth height | 40 - 175 mm |
| End of cycle indicator | ActiveLight | Can be installed in-column | Yes, with siphon |
| Auto switch-off | Yes | Adjustable feet | 6 cm, from 820 to 880 mm |
| Washing system | Standard | Additional gaskets | Yes |
| Water softener | With electronic setting | Depth of dishwasher with open door (mm) | 1200 mm |
| Turbidity sensor Aquatest | Yes | Back feet adjustable from front | Yes |
| Flood protection system | Total Acquastop | | |


Performance / Energy Label - Reg. 2019



| | | | |
|--|------------|---|------------------|
| Energy Efficiency Class | D | Programme duration | 4:00 h:min |
| Energy consumption [per 100 cycles, based on the eco programme] | 67 kWh | Airborne acoustical noise emissions | 44 dB(A) re 1 pW |
| Rated capacity (ps) | 10 | Airborne acoustical noise emission class | B |
| Water consumption [per cycle] | 9,9 litres | Energy efficiency Index (EEI) | 49,9 |

Electrical Connection

| | | | |
|------------------------|-----------|----------------------------------|--------------|
| Connected power | 1950 W | Type of connection | Single-phase |
| Current | 10 A | Power supply cable length | 150 cm |
| Voltage | 220-240 V | Plug | (F;E) Schuko |
| Frequency (Hz) | 50 Hz | | |

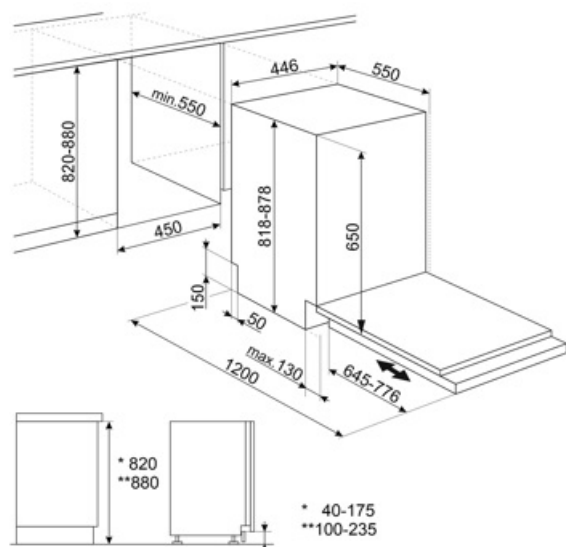























Compatible Accessories






KITPLV2

Kit extension for dishwasher and washing machine: lenght mt. 2



Symbols glossary

| | | | |
|--|---|---|--|
|  | Activelight is an led light which projects a red spot onto the floor beneath the dishwasher when the appliance is in use. |  | The Aquatest sensor is an electronic sensor that measures the degree of water transparency at the end of the initial soaking phase. Based on the values measured, the sensor sets the most suitable programme, thus obtaining the best washing results with the minimum amount of water. |
|  | To improve the drying of dishes without leaving stains. |  | Energy efficiency class D |
|  | Installation in column: Installation in column. |  | 82 cm high |
|  | Delay Timer: Option to postpone the start of the desired programme by up to 24 hours in order to programme the dishwasher to run at the desired time. |  | Option which improves the washing results of the selected programme. It increases the wash temperature and duration. |
|  | The FlexiFit hinges allow the kitchen panel to slide over the dishwasher door, allowing a minimum kitchen plinth height of 5 cm. |  | |
|  | |  | This option provides special care for a delicate load. It prevents rapid changes in the wash temperature of the selected programme and reduces it to 4 |
|  | Smeg's evolution towards more intelligent and eco-friendly models has led to the choice of Inverter technology, which significantly reduces consumption. |  | Noise Level: Excellent insulation and special devices keep noise to a minimum. |
|  | Wash cycle for normally soiled mixed loads such as dishes and pans, even with dried-on residues. When this program is selected, the dishwasher recognises the type of dirt and automatically adjusts the washing parameters as appropriate. |  | Eco: Eco, this economic wash programme uses a low amount of water and energy in order to provide the most environmentally friendly cleaning option. |
|  | Mix: The Mix programme is suitable for mixed crockery and everyday pots and pans, without any particular incrustation. |  | Soak programme: The soak programme provides a rinse to prevent dirt from drying. |
|  | 10 place settings: Number of place settings. |  | Total Acquastop: In addition to the partial Acquastop protection present in all Smeg dishwashers, some models have an electronic device fitted to the water intake hose, which monitors water levels in the machine, detects leaks in the hose and switches off the water supply immediately when necessary. |
|  | Touch controls: Easy to use touch controls allow the appliance to be programmed at the touch of a button. |  | A quick programme suitable for washing a load with fresh and light soil. |

-
- | | | | |
|--|--|---|---|
|  | <p>Quick wash cycle for normally soiled mixed loads such as dishes and pans, even with dried-on residues. Dishes are washed and dried in 60 minutes.</p> |  | <p>Dishwasher cleaning cycle. The cycle should be started with the machine empty, without dishes. It is recommended to run the program every 2-3 months, using special dishwasher detergents.</p> |
|  | <p>Programme suitable for washing and drying heavily soiled items with encrusted residues.</p> |  | <p>Option which provides better cleaning results by keeping the temperature between 65 and 70°C for at least 10 minutes during the last rinsing phase.</p> |
|  | <p>System WaterSave ensures the best washing results with minimal water consumption depending on the model of dishwasher.</p> | | |