

ST649T-1

Product Family Commercial width Commercial height Installation Kitchen panel N° baskets Motor EAN code

Dishwashers 60 cm 82 cm Fully-integrated built-in Not supplied 2 Single phase 8017709298470



Programs

ECO 55° 77° 55°			
N. of programmes	5	Mix	Yes
Washing temperatures	50, 65, 70 °C	Intense	Yes
Soak	Yes	1/2 load	Yes
ECO	Yes		

Baskets

Basket colour Basket components	Grey Grey	Largest loadable dish in upper basket	25,0 cm
colour	-	Lower Basket	With fixed racks
Handle	In plastic only on upper basket	Largest loadable dish in lower basket	30,0 cm
Upper Basket	With central fixed racks	Colour Inner	Blue
Height adjustment of	On two levels, by extraction	Components	
the upper basket		Cutlery basket	13 place settings sliding

Technical Features

Width (mm)	598 mm	Water supply	Single; cold/hot water max.
Depth (mm)	545 mm		60°C - energysave with hot water up to 35%
Product Height (mm)	818 mm		
Controls	Electronic	, , ,	
Programme graphics	Symbols		Natural condenser drying
On/off indicator	Yes	Steam protection	In plastic




Salt light indicator Rinse aid indicator End of cycle indicator Washing system Third spray arm Water softener Flood protection system Single Acquastop

Light Light Acoustic signal Standard Single With electronic setting

Tub material Filter	Stainless steel Stainless steel
Concealed heating element	Yes
Hinges	Self balancing with fixed hinges
Min. and max. frontal panel weight	2 - 9 kg
Min. and max plinth height	100 - 228 mm
Adjustable feet	7cm, from 820 to 890 mm
Depth of dishwasher with open door (mm)	1146
Top cover	In plastic

Electrical Connection

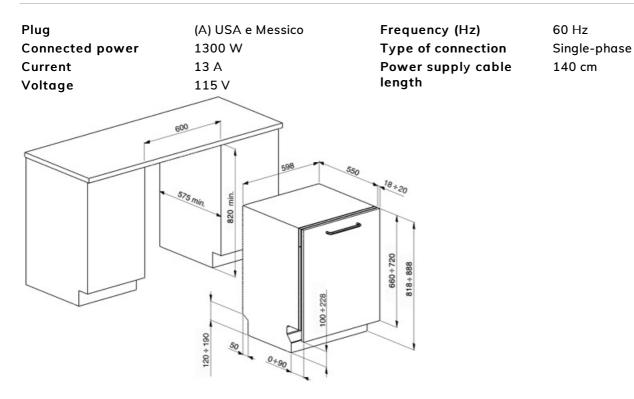



Compatible Accessories



KIT6CX

Classic aesthetics stainless steel panel with 14 mm. handle. Can be fittet on the fully integrated dishwashers.

KITPL60FABB



Toekick Kit in White colour with adjustable height. Can be fitted over all the fully integrated and underbench models with Fixed Fulcrum. Can be installed also on the models with variable fulcrum or flexifit hinges.

KITPL60FABX



Toekick Kit in Stainless Steel with adjustable height. Can be fitted over all the fully integrated and underbench models with Fixed Fulcrum. Can be installed also on the models with variable fulcrum or flexifit hinges.



KIT82CAN

Classic aesthetics anthracite panel with 14 mm. handle. Can be fittet on the fully integrated dishwashers.

KITPL60FABN

Toekick Kit in Black colour with adjustable height. Can be fitted over all the fully integrated and underbench models with Fixed Fulcrum. Can be installed also on the models with variable fulcrum or flexifit hinges.

KITPLV2

Kit extension for dishwasher and washing machine: lenght mt. 2





Symbols glossary

ACQUARTON	Acquastop: Some Smeg dishwashers are equipped with a simple Acquastop: float sensor in the bottom which is necesary to prevent an accidental leakage of water inside the appliance.	A P	A+: Energy efficiency class A+ helps to save up to 10% energy compared to class A. Maximum performance with minimum consumption is guaranteed.
82 cm	82 cm high	65° ≷½≶	1/2 load: This program is designed for washing dishes not heavily soiled with partial load of the dishwasher.
ECO 50°	Eco: Eco, this economic wash programme uses a low amount of water and energy in order to provide the most environmentally friendly cleaning option.	65)))	Mix: The Mix programme is suitable for mixed crockery and everyday pots and pans, without any particular incrustation.
	Soak programme: The soak programme provides a rinse to prevent dirt from drying.	70°	Ultraclean: The Ultraclean option performs a final rinse at a high temperature of 70°c eliminating virtually all bacteria.
iŌi	12 place settings: Number of place settings.	000 12 lt	System WaterSave ensures the best washing results with minimal water consumption

depending on the model of dishwasher.