

STFABBL3







Product Family

Width Commercial height

Installation Under counter built-in Kitchen panel 50's style door panel

N° baskets 3, FlexiDuo Motor Inverter 2.0 8017709305048 **EAN** code



Programmes

















Dishwashers

60 cm

82 cm







No. of programmes

Washing temperatures 38, 45, 50, 55, 65, 70, 75 °C

Soak Express 27' Yes Crystal Yes Full express - 60

minutes

ECO

10 + 1

Yes

Yes

Auto sensor 45-65

Quiet (-2 dB)

Yes Intense Yes Self clean Yes

Hygiene 99,9% Yes

Options









Dry Assist+ option **Delay timer option**

Up to 9 hours, with

automatic soak Yes

Intensive wash zone option

Special programs option Yes

1/2 load FlexiZone option (varied distribution)

Baskets





Basket colour

Grey

Upper basket with EasyGlide System

Yes

Yes

Yes



Basket components

colour

Grey Largest loadable dish in 19,0 cm

upper basket

With 4 foldable racks Lower Basket Handle In plastic with stainless

Lower basket with anti- Yes steel insert on upper and

lower basket

On three levels

Electronic

Yes

With 3 foldable racks

drip inserts

Largest loadable dish in 30,0 cm

lower basket

Colour Inner Grey

Components

Technical Features

Height adjustment of

the upper basket



Controls



Upper Basket

Glass holder



Width (mm) 598 mm Depth (mm) 584 mm

Display type 1 digit Product Height (mm) 818 mm

Delayed start Display

Symbols Programme graphics On/off indicator Yes Salt light indicator Light Rinse aid indicator Light

End of cycle indicator Acoustic signal Washing system Planetarium Third spray arm Single

Water softener With electronic setting

Yes

Turbidity sensor

Aquatest

Flood protection system Total Acquastop

Water supply

Single; cold/hot water max. 60°C - energysave with hot

water up to 35%

Max water hardness 100°fH:58°dH

Drying system Natural condenser drying,

with Dry Assist + automatic door opening system at the

end of the cycle

Steam protection Metallic sheet Tank material Stainless steel Filter Stainless steel

Concealed heating

element

Hinges Self balancing with fixed

hinges

98 - 168 mm

Yes

Min. and max plinth

height

Adjustable feet Additional gaskets 7cm, from 820 to 890 mm

Yes, with stainless steel

plate

Yes Back cover 1146 Depth of dishwasher

with open door (mm)

Back feet adjustable

from front Top cover

Yes

In plastic

37,6

Performance / Energy Label





Number of place

Energy efficiency class

settings

13

В

Index (EE)

The Energy Effiency

Noise level 44 dB(A) re 1 pW


Electrical Connection

Plua (F:E) Schuko Frequency (Hz) 50 Hz



Connected power 1800 W
Current 10 A
Voltage 220-240 V

Type of connection Power supply cable length Single-phase 140 cm

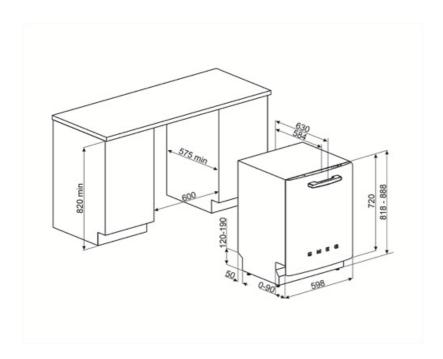



Compatible Accessories

KITGH



Kit glass holder. It has to be fitted on the first basket but only if there are foldable racks

KITPL60FABN



Toekick Kit in Black colour with adjustable height. Can be fitted over all the fully integrated and underbench models with Fixed Fulcrum. Can be installed also on the models with variable fulcrum or flexifit hinges.

KITPLV2



Kit extension for dishwasher and washing machine: length mt. 2

KITPL60FABB

Toekick Kit in White colour with adjustable height. Can be fitted over all the fully integrated and underbench models with Fixed Fulcrum. Can be installed also on the models with variable fulcrum or flexifit hinges.

KITPL60FABX

Toekick Kit in Stainless Steel with adjustable height. Can be fitted over all the fully integrated and underbench models with Fixed Fulcrum. Can be installed also on the models with variable fulcrum or flexifit hinges.



Alternative products



STFABCR3

Colour: Cream



STFABRD3

Colour: Red



Symbols glossary



Aquatest measures the clarity of the water during an auto program, and automatically ensures the minimum consumption of water and energy.



Anti-drip: Some models of dishwashers are equipped with special polymer nozzles anti-drip, that improve the process of drying.



Energy efficiency class B



COMM_HEIGHT_82_72dpi



Delay Timer: The delay timer can postpone the start of the program by up to 24 hours.



The Dry Assist + option, in addition to saving energy, ensures perfect drying of the dishes by opening the door automatically at the end of the wash c



EasyGlide: Convenient EasyGlide system for easy unloading of the appliance that allows reaching maximum flexibility of load of the machine.



FlexiDuo: The FlexiDuo 3rd cutlery basket allows you to arrange cutlery or small cups, ladles, or bulky utensils however you like: it consists of two separate and moveable modules.



FlexiZone: The ½ load flexizone allows you to wash a reduced load saving energy, water and time and there are no restrictions on where the items are placed.



Noise Level: Excellent insulation and special devices keep noise to a minimum.



PLANETARIUM_WASHING_SYSTEM_72dpi



Auto 45°- 65°: The auto programme regulates the length of a cycle depending on the need for a pre-wash and the number of rinses required.



Crystals: The Crystals programme is dedicated to delicate dishes such as glasses and china.



Eco: Eco, this economic wash programme uses a low amount of water and energy in order to provide the most environmentally friendly cleaning option.



Normal programme: The normal programme is suitable for normal degrees of dirt for everyday



Soak programme: The soak programme provides a rinse to prevent dirt from drying.



Rapid 27 Mins: The rapid 27 mins quick program takes just 27 minutes to wash a load.



Ultraclean: The Ultraclean option performs a final rinse at a high temperature of 70°c eliminating virtually all bacteria.



The symbols show the number of plate settings of the dishwasher.



Total Acquastop: In addition to the partial Acquastop protection present in all Smeg dishwashers, some models have an electronic device fitted to the water intake hose, which monitors water levels in the machine, detects leaks in the hose and switches off the water supply immediately when necessary.



System WaterSave ensures the best washing results with minimal water consumption depending on the model of dishwasher.



•





•••





..



HYGIENE 99.9% High-temperature washing programme. The 75° rinse guarantees the removal of 99.9% of germs and bacteria, making it ideal for sanitising



The work aimed at continuous improvement has allowed the creation of the second generation of the Inverter motor 2.0, characterised by greater efficiency and durability over time, which allows very high performance and a lower energy consumption and noise level.



7,6