

# STFABCR3



Product Family Width Commercial height Installation Kitchen panel N° baskets Motor EAN code Dishwashers 60 cm 82 cm Under counter built-in 50's style door panel 3, FlexiDuo Inverter 2.0 8017709305055



### Programmes

(27m) (27m) (45° (60 ) (50° ) (50°	AUTO 65°	â75°	
No. of programmes	10+1	Auto sensor 45-65	Yes
Washing temperatures	38, 45, 50, 55, 65, 70, 75 °C	Mix	Yes
Soak	Yes	Quiet (-2 dB)	Yes
Express 27'	Yes	Intense	Yes
Crystal	Yes	Self clean	Yes
Full express - 60 minutes	Yes	Hygiene 99,9%	Yes
ECO	Yes		

### Options



Dry Assist+ option Delay timer option

1/2 load FlexiZone option (varied distribution) Yes Up to 9 hours, with automatic soak Yes Intensive wash zone option Special programs option Yes

### Baskets



**Basket colour** 

Grey

Upper basket with EasyGlide System Yes



Basket components colour	Grey	Largest loadable dish in upper basket	19,0 cm
Handle	In plastic with stainless steel insert on upper and lower basket	Lower Basket Lower basket with anti- drip inserts	With 4 foldable racks Yes
Upper Basket With 3 foldable racks	Largest loadable dish in lower basket	30,0 cm	
Glass holder Height adjustment of the upper basket	ustment of On three levels	Colour Inner Components	Grey Flexiduo, Grey Planetarium, Cup shelves, Handle, Anti drop inserts, Cutlery basket: same colour of Dishwasher

# **Technical Features**

AQUATEST			
Width (mm)	598 mm	Water supply	Single; cold/hot water max.
Depth (mm)	584 mm		60°C - energysave with hot water up to 35%
Display type	1 digit	Max water hardness	100°fH;58°dH
Product Height (mm)	818 mm		
Controls	Electronic	Drying system	Natural condenser drying, with Dry Assist + automatic
Display	Delayed start		door opening system at the
Programme graphics	Symbols		end of the cycle
On/off indicator	Yes	Steam protection	Metallic sheet
Salt light indicator	Light	Tank material	Stainless steel
Rinse aid indicator	Light	Filter	Stainless steel
End of cycle indicator	Acoustic signal	Concealed heating	Yes
Washing system	Planetarium	element	
Third spray arm	Single	Hinges	Self balancing with fixed
Water softener	With electronic setting		hinges
Turbidity sensor Aquatest	Yes	Min. and max plinth height	98 - 168 mm
Flood protection system	Total Acquastop	Adjustable feet	7cm, from 820 to 890 mm
· · · · · · · · · · · · · · · · · · ·		Additional gaskets	Yes, with stainless steel plate
		Back cover	Yes
		Depth of dishwasher with open door (mm)	1146
		Back feet adjustable from front	Yes
		Top cover	In plastic

# Performance / Energy Label

Energy Efficiency Class	В	Programme duration	4:25 h:min
(Washing cycle)		Airborne acoustical	44 dB(A) re 1 pW
Energy consumption [per 100 cycles, based	63 kWh	noise emissions (spinning phase)	
on the eco programme]		Airborne acoustical	В
Rated capacity (ps)	13	noise emission class	




Water consumption [per 9,0 litres cycle]

Energy efficiency Index 37,9 (EEI) (Washing cycle)

# **Electrical Connection**

Plug	(F;E) Schuko	Frequency (Hz)	50 Hz
Connected power	1800 W	Type of connection	Single-phase
Current	10 A	Power supply cable	140 cm
Voltage	220-240 V	length	

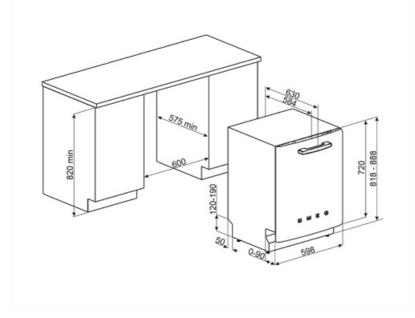



### **Compatible Accessories**

#### KITGH



Kit glass holder. It has to be fitted on the first basket but only if there are foldable racks

#### **KITPL60FABN**



Toekick Kit in Black colour with adjustable height. Can be fitted over all the fully integrated and underbench models with Fixed Fulcrum. Can be installed also on the models with variable fulcrum or flexifit hinges.

#### KITPLV2

Kit extension for dishwasher and washing machine: length mt. 2

#### KITPL60FABB

Toekick Kit in White colour with adjustable height. Can be fitted over all the fully integrated and underbench models with Fixed Fulcrum. Can be installed also on the models with variable fulcrum or flexifit hinges.

#### KITPL60FABX

Toekick Kit in Stainless Steel with adjustable height. Can be fitted over all the fully integrated and underbench models with Fixed Fulcrum. Can be installed also on the models with variable fulcrum or flexifit hinges.





# Alternative products



STFABBL3

Colour: Black



STFABRD3 Colour: Red



# Symbols glossary

AQUATEST	Aquatest measures the clarity of the water during an auto program, and automatically ensures the minimum consumption of water and energy.	٢	Anti-drip: Some models of dishwashers are equipped with special polymer nozzles anti-drip, that improve the process of drying.
82 cm ▼	COMM_HEIGHT_82_72dpi	$\widehat{\mathbb{Y}}$	Delay Timer: The delay timer can postpone the start of the program by up to 24 hours.
	EasyGlide: Convenient EasyGlide system for easy unloading of the appliance that allows reaching maximum flexibility of load of the machine.		FlexiDuo: The FlexiDuo 3rd cutlery basket allows you to arrange cutlery or small cups, ladles, or bulky utensils however you like: it consists of two separate and moveable modules.
( <u>*</u> )	FlexiZone: The ½ load flexizone allows you to wash a reduced load saving energy, water and time and there are no restrictions on where the items are placed.	44 dB	Noise Level: Excellent insulation and special devices keep noise to a minimum.
Þ	PLANETARIUM_WASHING_SYSTEM_72dpi	AUTO 45°-65°	Auto 45°- 65°: The auto programme regulates the length of a cycle depending on the need for a pre-wash and the number of rinses required.
Q45°	Crystals: The Crystals programme is dedicated to delicate dishes such as glasses and china.	ECO 50°	Eco: Eco, this economic wash programme uses a low amount of water and energy in order to provide the most environmentally friendly cleaning option.
65°	Normal programme: The normal programme is suitable for normal degrees of dirt for everyday use.		Soak programme: The soak programme provides a rinse to prevent dirt from drying.
27min	Rapid 27 Mins: The rapid 27 mins quick program takes just 27 minutes to wash a load.	70°	Ultraclean: The Ultraclean option performs a final rinse at a high temperature of 70°c eliminating virtually all bacteria.
ī	The symbols show the number of plate settings of the dishwasher.	According to the second	Total Acquastop: In addition to the partial Acquastop protection present in all Smeg dishwashers, some models have an electronic device fitted to the water intake hose, which monitors water levels in the machine, detects leaks in the hose and switches off the water supply immediately when necessary.
000 9 lt	System WaterSave ensures the best washing results with minimal water consumption depending on the model of dishwasher.	60 min	
		¢	
Ś			The Dry Assist + option, in addition to saving energy, ensures perfect drying of the dishes by opening the door automatically at the end of the wash c



B	Energy efficiency class B	75
NVYATER 20	The work aimed at continuous improvement has allowed the creation of the second generation of the Inverter motor 2.0, characterised by greater efficiency and durability over time, which allows very high performance and a lower energy consumption and noise level.	

HYGIENE 99.9% High-temperature washing programme. The 75° rinse guarantees the removal of 99.9% of germs and bacteria, making it ideal for sanitising



# Benefit

#### FlexiDuo

For added convenience, the flexible third basket—FlexiDuo—adapts to accommodate various types of dishes, giving you extra space and better organisation with every load

The third FlexiDuo basket consists of two separate sections that can be handled independently of each other, stacked and/or removed, offering loading flexibility for every need. Depending on the arrangement, it allows cups, tall glasses, bulky utensils and pots and pans to be placed in the upper basket.

#### Planetarium Wash System

Smeg's unique Planetarium Wash System uses a specially designed spray arm to deliver full, deep cleaning coverage across every corner of the dishwasher

Smeg's patented Planetarium Wash System guarantees impeccable cleaning. With a simultaneous double movement of the sprayer and 65 rotations per minute, it reaches every nook and cranny for extraordinary results. Dishes, glasses and utensils will be perfectly clean in no time. An intelligent system where efficiency and style meet, delivering brilliant results effortlessly.

#### DryAssist+

At the end of the cycle, the Dry Assist+ feature automatically opens the door to speed up drying and improve energy efficiency