

# STFABCR3







**Product Family** 

Width 60 cm 82 cm Commercial height

Installation Under counter built-in Kitchen panel 50's style door panel

N° baskets 3, FlexiDuo Motor Inverter 2.0 EAN code 8017709305055



Yes

Yes

### **Programs / Functions**

















Dishwashers







No. of programmes

Washing temperatures 38, 45, 50, 55, 65, 70, 75 °C

Soak Express 27' Yes Crystal Yes Full express - 60 Yes

minutes

**ECO** 

Yes

10 + 1

Yes Quiet (-2 dB) Yes Intense Yes

Auto sensor 45-65

Self clean Yes Hygiene 99,9% Yes

## **Options**









Dry Assist+ option **Delay timer option** 

Up to 9 hours, with automatic soak

1/2 load FlexiZone option (varied

distribution) Special programs option Yes

### **Baskets**





**Basket colour Basket components** 

colour

Grey Grey

Upper basket with Yes EasyGlide System

Largest loadable dish in 19,0 cm

upper basket



Handle

In plastic with stainless

lower basket

On three levels

Yes

598 mm

584 mm

**Upper Basket** Glass holder

Height adjustment of the upper basket

steel insert on upper and

With 3 foldable racks

drip inserts

Largest loadable dish in 30,0 cm

lower basket

Lower Basket

Colour Inner Components With 4 foldable racks

Lower basket with anti- Yes

Grey Flexiduo, Grey

Planetarium, Cup shelves, Handle, Anti drop inserts, Cutlery basket: same colour

of Dishwasher

### **Technical Features**







Width (mm) Depth (mm) Display type

1 digit Product Height (mm) 818 mm Controls Electronic Display Delayed start

Programme graphics Symbols On/off indicator Yes Salt light indicator Light Rinse aid indicator Light

End of cycle indicator Acoustic signal Washing system Planetarium Third spray arm Single

Water softener With electronic setting

**Turbidity sensor** 

Aquatest

Flood protection system Total Acquastop

Water supply

Single: cold/hot water max. 60°C - energysave with hot

> water up to 35% 100°fH;58°dH

Max water hardness Drying system

Natural condenser drying,

with Dry Assist + automatic door opening system at the

end of the cycle

Steam protection Metallic sheet Tank material Stainless steel Filter Stainless steel

Concealed heating

element

Hinges Self balancing with fixed

hinges

Yes

Min. and max plinth

height

Adjustable feet Additional gaskets 98 - 168 mm

7cm, from 820 to 890 mm Yes, with stainless steel

plate Yes

1146

**Back cover** Depth of dishwasher with open door (mm)

Back feet adjustable

from front

Top cover

Yes

In plastic

4:25 h:min

44 dB(A) re 1 pW

## Performance / Energy Label NEW









**Energy Efficiency Class** (Washing cycle)

**Energy consumption** 63 KWh

[per 100 cycles, based on the eco programme] Rated capacity (ps)

13 Water consumption [per 9.0 litres

cycle]

Programme duration Airborne acoustical

noise emissions (spinning phase) Airborne acoustical noise emission class

В

**Energy efficiency Index** (EEI) (Washing cycle)

37.9




# **Electrical Connection**

Plug (F;E) Schuko
Connected power 1800 W
Current 10 A
Voltage 220-240 V

Frequency (Hz)
Type of connection
Power supply cable
length

50 Hz Single-phase 140 cm

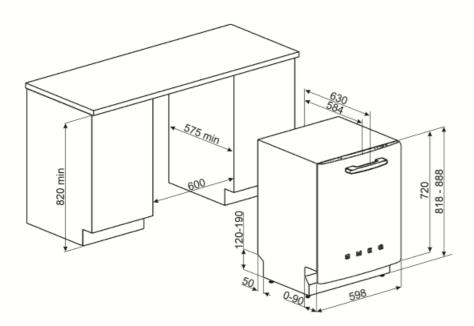



### Not included accessories

#### KITPL60FABB



Toekick Kit in White colour with adjustable height. Can be fitted over all the fully integrated and underbench models with Fixed Fulcrum. Can be installed also on the models with variable fulcrum or flexifit hinges.

#### KITPL60FABN



Toekick Kit in Black colour with adjustable height. Can be fitted over all the fully integrated and underbench models with Fixed Fulcrum. Can be installed also on the models with variable fulcrum or flexifit hinges.

#### **KITGH**



Kit glass holder. It has to be fitted on the first basket but only if there are foldable racks

#### KITPL60FABX

Toekick Kit in Stainless Steel with adjustable height. Can be fitted over all the fully integrated and underbench models with Fixed Fulcrum. Can be installed also on the models with variable fulcrum or flexifit hinges.

#### KITPLV2



Kit extension for dishwasher and washing machine: length mt. 2



# Alternative products



STFABBL3
Colour: Black



STFABRD3
Colour: Red



### Symbols glossary



Aquatest measures the clarity of the water during an auto program, and automatically ensures the minimum consumption of water and energy.



Anti-drip: Some models of dishwashers are equipped with special polymer nozzles anti-drip, that improve the process of drying.



COMM\_HEIGHT\_82\_72dpi



Delay Timer: The delay timer can postpone the start of the program by up to 24 hours.



EasyGlide: Convenient EasyGlide system for easy unloading of the appliance that allows reaching maximum flexibility of load of the machine.



FlexiDuo: The FlexiDuo 3rd cutlery basket allows you to arrange cutlery or small cups, ladles, or bulky utensils however you like: it consists of two separate and moveable modules.



FlexiZone: The ½ load flexizone allows you to wash a reduced load saving energy, water and time and there are no restrictions on where the items are placed.



Noise Level: Excellent insulation and special devices keep noise to a minimum.



PLANETARIUM\_WASHING\_SYSTEM\_72dpi



Auto 45°- 65°: The auto programme regulates the length of a cycle depending on the need for a pre-wash and the number of rinses required.



Crystals: The Crystals programme is dedicated to delicate dishes such as glasses and china.



Eco: Eco, this economic wash programme uses a low amount of water and energy in order to provide the most environmentally friendly cleaning option.



Normal programme: The normal programme is suitable for normal degrees of dirt for everyday use.



Soak programme: The soak programme provides a rinse to prevent dirt from drying.



Rapid 27 Mins: The rapid 27 mins quick program takes just 27 minutes to wash a load.



Ultraclean: The Ultraclean option performs a final rinse at a high temperature of 70°c eliminating virtually all bacteria.



The symbols show the number of plate settings of the dishwasher.



Total Acquastop: In addition to the partial Acquastop protection present in all Smeg dishwashers, some models have an electronic device fitted to the water intake hose, which monitors water levels in the machine, detects leaks in the hose and switches off the water supply immediately when necessary.



System WaterSave ensures the best washing results with minimal water consumption depending on the model of dishwasher.



--



...



The Dry Assist + option, in addition to saving energy, ensures perfect drying of the dishes by opening the door automatically at the end of the wash c

**(S**)

•••





Energy efficiency class B



HYGIENE 99.9% High-temperature washing programme. The 75° rinse guarantees the removal of 99.9% of germs and bacteria, making it ideal for sanitising



The work aimed at continuous improvement has allowed the creation of the second generation of the Inverter motor 2.0, characterised by greater efficiency and durability over time, which allows very high performance and a lower energy consumption and noise level.