

STFABCR3







Product Family Dishwashers Commercial width 60 cm 82 cm Commercial height

Installation Under counter built-in Kitchen panel 50's style door panel

N° baskets 3, FlexiDuo Motor Inverter 2.0 EAN code 8017709305055



Yes

Yes

Yes

Yes

Yes

Programs























N. of programmes 10 + 1Washing temperatures Soak Express 27' Yes Crystal Yes Full express - 60 Yes minutes

ECO Yes

Auto sensor 45-65 38, 45, 50, 55, 65, 70, 75 °C Quiet (-2 dB) Intense Self clean

Hygiene 99,9% Yes

Options









Dry Assist+ option **Delay timer option**

1/2 load FlexiZone

option

Yes

Up to 9 hours

Yes

Intensive wash zone

option

Special programs option Yes

Baskets





Basket colour **Basket components**

colour

Grey Grey

Upper basket with Yes EasyGlide System

Largest loadable dish in 19,0 cm

upper basket



Handle

In plastic with stainless

lower basket

Upper Basket Glass holder

Height adjustment of the upper basket

steel insert on upper and

Yes

On three levels (5 cm)

With 3 foldable racks

Lower Basket

Lower basket with anti- Yes

drip inserts

Largest loadable dish in 30,0 cm

lower basket

Colour Inner Components With 4 foldable racks

Grey Flexiduo, Grey Planetarium, Cup shelfes,

Handle, Anti drop inserts, Cutlery basket: same colour

Single: cold/hot water max. 60°C - energysave with hot

Natural condenser drying,

with Dry Assist + automatic

of Dishwasher

water up to 35%

100°fH;58°dH

Stainless steel

Technical Features







Width (mm) Depth (mm)

Display type LED display (1 digit)

Product Height (mm) 818 mm Controls Electronic Display Delayed start Symbols Programme graphics On/off indicator Yes Salt light indicator Light

Rinse aid indicator Light End of cycle indicator Acoustic signal Washing system Planetarium Third spray arm Single

Water softener With electronic setting

Turbidity sensor

Aquatest

Flood protection system Total Acquastop

598 mm Water supply

584 mm

Max water hardness

Drying system

door opening system at the end of the cycle Steam protection Metallic sheet Tub material Stainless steel

Filter Concealed heating

element Hinges

Min. and max plinth

height

Adjustable feet Additional gaskets Self balancing with fixed

hinges

Yes

98 - 168 mm

7 cm, from 820 to 890 mm Yes, with stainless steel

plate Yes

Back cover 1146 mm Depth of dishwasher with open door (mm)

Back feet adjustable

from front

Top cover

Yes

In plastic

Performance / Energy Label - Reg. 2019









Energy Efficiency Class Energy consumption 63 kWh

[per 100 cycles, based on the eco programme]

13 Rated capacity (ps) Water consumption [per 9,0 litres

cycle]

Programme duration Airborne acoustical

noise emissions Airborne acoustical noise emission class

Energy efficiency Index

(EEI)

4:25 h:min 44 dB(A) re 1 pW

В

37,9




Electrical Connection

Connected power 1800 W Current 10 A Voltage 220-240 V Frequency (Hz) 50 Hz

Type of connection Power supply cable length

140 cm Plug (F;E) Schuko

Single-phase

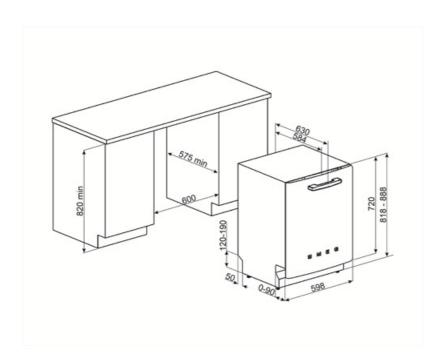



Compatible Accessories

KITGH



Kit glass holder. It has to be fitted on the first basket but only if there are foldable racks

KITPL60FABN



Toekick Kit in Black colour with adjustable height. Can be fitted over all the fully integrated and underbench models with Fixed Fulcrum. Can be installed also on the models with variable fulcrum or flexifit hinges.

KITPLV2



Kit extension for dishwasher and washing machine: lenght mt. 2

KITPL60FABB

Toekick Kit in White colour with adjustable height. Can be fitted over all the fully integrated and underbench models with Fixed Fulcrum. Can be installed also on the models with variable fulcrum or flexifit hinges.

KITPL60FABX

Toekick Kit in Stainless Steel with adjustable height. Can be fitted over all the fully integrated and underbench models with Fixed Fulcrum. Can be installed also on the models with variable fulcrum or flexifit hinges.



Alternative products



STFABBL3
Colour: Black



STFABRD3
Colour: Red



Symbols glossary



The Aquatest sensor is an electronic sensor that measures the degree of water transparency at the end of the initial soaking phase. ased on the values measured, the sensor sets the most suitable programme, thus obtaining the best washing results with the minimum amount of water.



To improve the drying of dishes without leaving stains.



82 cm high



Delay Timer: Option to postpone the start of the desired programme by up to 24 hours in order to programme the dishwasher to run at the desired time.



EasyGlide: Convenient EasyGlide system for easy unloading of the appliance that allows reaching maximum flexibility of load of the machine.



FlexiDuo: The FlexiDuo 3rd cutlery basket allows you to arrange cutlery or small cups, ladles, or bulky utensils however you like: it consists of two separate and moveable modules.



FlexiZone: The ½ load flexizone allows you to wash a reduced load saving energy, water and time and there are no restrictions on where the items are placed.



Noise Level: Excellent insulation and special devices keep noise to a minimum.



The Planetarium washing system, with high rotations per minute, guarantees complete coverage of the tank, thanks to the simultaneous rotation of base and sprayers, and excellent washing results.



Auto 45°- 65°: The auto programme regulates the length of a cycle depending on the need for a pre-wash and the number of rinses required.



Crystals: The Crystals programme is dedicated to delicate dishes such as glasses and china.



Eco: Eco, this economic wash programme uses a low amount of water and energy in order to provide the most environmentally friendly cleaning option.



Mix: The Mix programme is suitable for mixed crockery and everyday pots and pans, without any particular incrustation.



Soak programme: The soak programme provides a rinse to prevent dirt from drying.



Express 27': The Express 27' programme is a quick wash cycle, at low temperatures, for lightly soiled dishes.



Ultraclean: The Ultraclean option performs a final rinse at a high temperature of 70°c eliminating virtually all bacteria.



13 place settings: Number of place settings.



Total Acquastop: In addition to the partial Acquastop protection present in all Smeg dishwashers, some models have an electronic device fitted to the water intake hose, which monitors water levels in the machine, detects leaks in the hose and switches off the water supply immediately when necessary.



System WaterSave ensures the best washing results with minimal water consumption depending on the model of dishwasher.



Quick wash cycle for normally soiled mixed loads such as dishes and pans, even with dried-on residues. Dishes are washed and dried in 60 minutes.





Dishwasher cleaning cycle. The cycle should be started with the machine empty, without dishes. It is recommended to run the program every 2-3 months, using special dishwasher detergents.



Allows you to enable additional programs when selected together with any wash cycle. After having selected the required wash cycle, press the button (



Energy efficiency class B



7,6

The work aimed at continuous improvement has allowed the creation of the second generation of the Inverter motor 2.0, characterised by greater efficiency and durability over time, which allows very high performance and a lower energy consumption and noise level.



SILENT: Wash cycle suitable for normally soiled dishes, even with dried-on residues. Ensures maximum noise reduction and is therefore ideal if you wish to run it during the night.



The Dry Assist + option, in addition to saving energy, ensures perfect drying of the dishes by opening the door automatically at the end of the washing cycle.



HYGIENE 99.9% High-temperature washing programme. The 75° rinse guarantees the removal of 99.9% of germs and bacteria.

