# smeg

# STL262D

| | | |
|---|---|---|
| **Product Family** | Dishwashers | |
| **Commercial width** | 60 cm | |
| **Commercial height** | 82 cm | |
| **Installation** | Fully-integrated built-in | |
| **Kitchen panel** | Not supplied | |
| **N° baskets** | 2 | |
| **Motor** | Inverter 2.0 | |
| **EAN code** | 8017709337346 | |

## Programs

| | | | |
|---|---|---|---|
| **N. of programmes** | 7+1 | **ECO** | Yes |
| **Washing temperatures** | 50, 60 °C | **Self clean** | Yes |
| **Soak** | Yes | **Intense 60°** | Yes |
| **Full express - 60 minutes** | Yes | **Mix 60°** | Yes |
| **Express 50°** | Yes | **Auto 50°-60°** | Yes |

## Options

| | | | |
|---|---|---|---|
| **Delay timer option** | Up to 24 hours | **Crystal option** | Yes |
| **Extreme option** | Yes | | |

## Baskets

| | | | |
|---|---|---|---|
| **Basket colour** | Grey | **Largest loadable dish in upper basket** | 20,0 cm |
| **Basket components colour** | Grey | **Lower Basket** | With 2 foldable racks |
| **Handle** | In plastic on upper and lower basket | **Largest loadable dish in lower basket** | 31.0 cm |
| **Upper Basket** | With 1 foldable rack | **Colour Inner Components** | Grey |
| **Height adjustment of the upper basket** | On two levels (4 cm) | **Cutlery basket** | Yes |

# Technical Features

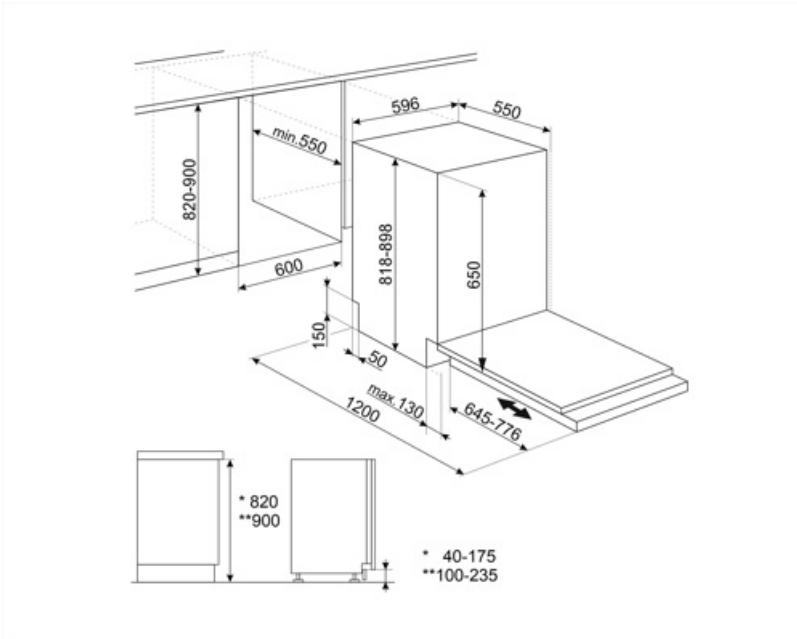| | | | | |
|---|---|---|---|---|
| Width (mm) | 596 mm | | Water supply | Single; cold/hot water max. 60°C - energysave with hot water up to 35% |
| Depth (mm) | 550 mm | | | |
| Display type | LED display (3 digit) | | | |
| Product Height (mm) | 818 mm | | Max water hardness | 90°fH; 50°dH |
| Controls | Electronic | | Drying system | Natural condenser drying, with Dry Assist automatic door opening system at the end of the cycle |
| Display | Delayed start, Programme time indicator | | | |
| Programme graphics | Symbols | | | |
| On/off indicator | Yes | | Steam protection | In plastic |
| Salt light indicator | Light | | Tub material | Stainless steel |
| Rinse aid indicator | Light | | Filter | Stainless steel |
| End of cycle indicator | On display, with acoustic signal | | Concealed heating element | Yes |
| Washing system | Standard | | Hinges | Self balancing, Sliding, FLEXIFIT |
| Water softener | With electronic setting | | | |
| Turbidity sensor Aquatest | Yes | | Min. and max. frontal panel weight | 2,5 - 10 kg |
| Flood protection system | Total Acquastop | | Min. and max plinth height | 40 - 175 mm |
| | | | Adjustable feet | 8cm, from 820 to 900mm |
| | | | Additional gaskets | Yes |
| | | | Depth of dishwasher with open door (mm) | 1200 |
| | | | Back feet adjustable from front | Yes |

# Performance / Energy Label - Reg. 2019

| | | | | |
|---|---|---|---|---|
| Energy Efficiency Class | D | | Programme duration | 4:00 h:min |
| Energy consumption [per 100 cycles, based on the eco programme] | 84 KWh | | Airborne acoustical noise emissions | 46 dB(A) re 1 pW |
| | | | Airborne acoustical noise emission class | C |
| Rated capacity (ps) | 13 | | Energy efficiency Index (EEI) | 49,9 |
| Water consumption [per cycle] | 9,9 litres | | | |

# Electrical Connection

| | | | | |
|---|---|---|---|---|
| Plug | (F;E) Schuko | | Frequency (Hz) | 50 Hz |
| Connected power | 1800 W | | Type of connection | Single-phase |
| Current | 10 A | | Power supply cable length | 140 cm |
| Voltage | 220-240 V | | | |

# smeg

## Symbols glossary (TT)

The Aquatest sensor is an electronic sensor that measures the degree of water transparency at the end of the initial soaking phase. ased on the values measured, the sensor sets the most suitable programme, thus obtaining the best washing results with the minimum amount of water.

Energy efficiency class D

82 cm high

Delay Timer: Option to postpone the start of the desired programme by up to 24 hours in order to programme the dishwasher to run at the desired time.

Option which improves the washing results of the selected programme. It increases the wash temperature and duration.

The FlexiFit hinges allow the kitchen panel to slide over the dishwasher door, allowing a minimum kitchen plinth height of 5 cm.

This option provides special care for a delicate load. It prevents rapid changes in the wash temperature of the selected programme and reduces it to 4

The work aimed at continuous improvement has allowed the creation of the second generation of the Inverter motor 2.0, characterised by greater efficiency and durability over time, which allows very high performance and a lower energy consumption and noise level.

Noise Level: Excellent insulation and special devices keep noise to a minimum.

Wash cycle for normally soiled mixed loads such as dishes and pans, even with dried-on residues. When this program is selected, the dishwasher recognises the type of dirt and automatically adjusts the washing parameters as appropriate.

Eco: Eco, this economic wash programme uses a low amount of water and energy in order to provide the most environmentally friendly cleaning option.

A quick programme suitable for washing a load with fresh and light soil.

Quick wash cycle for normally soiled mixed loads such as dishes and pans, even with dried-on residues. Dishes are washed and dried in 60 minutes.

Programme suitable for washing and drying heavily soiled items with encrusted residues.

Soak programme: The soak programme provides a rinse to prevent dirt from drying.

13 place settings: Number of place settings.

Total Acquastop: In addition to the partial Acquastop protection present in all Smeg dishwashers, some models have an electronic device fitted to the water intake hose, which monitors water levels in the machine, detects leaks in the hose and switches off the water supply immediately when necessary.

Dishwasher cleaning cycle. The cycle should be started with the machine empty, without dishes. It is recommended to run the program every 2-3 months, using special dishwasher detergents.

Programme suitable for washing and drying normally soiled items.

System WaterSave ensures the best washing results with minimal water consumption depending on the model of dishwasher.