

STL323BQLH







Product Family Dishwashers Commercial width 60 cm 86 cm Commercial height

Installation Fully-integrated built-in

Kitchen panel Not supplied

N° baskets 3, FlexiDuo with Easy Glide

Motor Inverter 2.0 EAN code 8017709307448



Yes

Programs























N. of programmes 10 + 1Washing temperatures 38, 45, 50, 55, 65, 70, 75 °C Soak Express 27' Yes Crystal Yes Full express - 60 Yes minutes

ECO Yes

Auto sensor 45-65

Yes Quiet (-2 dB) Yes Intense Yes Self clean Yes Hygiene 99,9% Yes

Options









Dry Assist+ option **Delay timer option**

1/2 load FlexiZone

option

Yes

Up to 24 hours

Yes

Intensive wash zone

option

Special programs option Yes

Baskets





Basket colour **Basket components**

colour

Grey Grey Upper basket with EasyGlide System

Largest loadable dish in 19,0 cm

Yes

upper basket



Handle

In plastic with stainless steel insert on upper and

Upper Basket Glass holder

Height adjustment of the upper basket

lower basket

On three levels (5 cm)

With 1 foldable rack

Lower Basket

Lower basket with anti- Yes

drip inserts

Largest loadable dish in 35,0 cm

lower basket

Colour Inner Components With 4 foldable racks

Natural condenser drying, with Dry Assist + automatic

door opening system at the

Stainless steel

2,5 - 10 kg

50 - 215 mm

Yes, with siphon

7 cm, from 860 to 930 mm

Yes, with stainless steel

Self balancing, Sliding,

Yes

Blue

Technical Features













Width (mm) Depth (mm)

Display type

Product Height (mm) Controls

Display

Programme graphics

On/off indicator Salt light indicator Rinse aid indicator

End of cycle indicator Washing system Third spray arm

Water softener

Turbidity sensor

Aquatest

Flood protection system

Water supply





598 mm 550 mm

LED display (3 digit)

858 mm Electronic

Delayed start, Programme time indicator

Symbols Yes Light Light

ActiveLight **Planetarium** Single

With electronic setting

Yes

Total Acquastop

Single; cold/hot water max. 60°C - energysave with hot

water up to 35%

Max water hardness 100°fH;58°dH

Drying system

end of the cycle Steam protection In plastic Tub material Stainless steel

Filter Concealed heating

element Hinges

FLEXIFIT

Min. and max. frontal panel weight

Min. and max plinth

height

Can be installed in-

column

Adjustable feet

Additional gaskets

Back cover

Depth of dishwasher with open door (mm) Back feet adjustable

from front Top cover

Yes 1168 mm

plate

Yes

In plastic

Performance / Energy Label - Reg. 2019









Energy Efficiency Class

Energy consumption [per 100 cycles, based on the eco programme] Rated capacity (ps)

64 kWh

14

Water consumption [per 9.0 litres

cycle]

Programme duration Airborne acoustical

noise emissions Airborne acoustical

noise emission class **Energy efficiency Index**

(EEI)

4:25 h:min

42 dB(A) re 1 pW

В

37.8




Electrical Connection

Connected power 1800 W
Current 10 A
Voltage 220-240 V
Frequency (Hz) 50 Hz

Type of connection Single-phase
Power supply cable 140 cm
length

Plug (F;E) Schuko

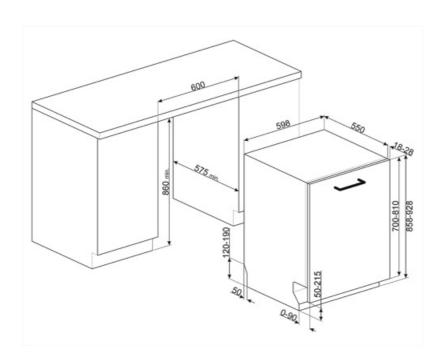



Compatible Accessories



KIT86CX-1

Door kit, stainless steel, Canali handle, fully integrated dishwasher h.86 cm Compatible with models with Flexifit and fixed fulcrum hinges.



KIT86PORTWH-1



KIT86PORTAN-1



KIT86PORTX-1



KIT86SPRAN



KIT86SPRMW



KIT86SPRX



KITFLEXI

Kit for 60cm dishwashers with FlexiFit hinges for door panel weight >11 kg (max 15 kg 82 cm and 13,5 kg 86 cm)



KITGH

Kit glass holder. It has to be fitted on the first basket but only if there are foldable racks



KITPL60B

Toekick Kit in White colour with adjustable height and deepness. Can be installed over all the fully integrated and underbench models with variable fulcrum or flexifit hinges.



KITPL60N

Toekick Kit in Black colour with adjustable height and deepness. Can be installed over all the fully integrated and underbench models with variable fulcrum or flexifit hinges.



KITPL60X

Toekick Kit in Stainless Steel with adjustable height and deepness. Can be fitted over all the fully integrated and underbench models with variable fulcrum or flexifit hinges.





Kit extension for dishwasher and washing machine: lenght mt. 2



Symbols glossary



Activelight is an led light which projects a red spot onto the floor beneath the dishwasher when the appliance is in use.



The Aquatest sensor is an electronic sensor that measures the degree of water transparency at the end of the initial soaking phase. ased on the values measured, the sensor sets the most suitable programme, thus obtaining the best washing results with the minimum amount of water.



To improve the drying of dishes without leaving stains.



Installation in column: Installation in column.



86 cm high



Delay Timer: Option to postpone the start of the desired programme by up to 24 hours in order to programme the dishwasher to run at the desired time



EasyGlide: Convenient EasyGlide system for easy unloading of the appliance that allows reaching maximum flexibility of load of the machine.



FlexiDuo: The FlexiDuo 3rd cutlery basket allows you to arrange cutlery or small cups, ladles, or bulky utensils however you like: it consists of two separate and moveable modules.



The FlexiFit hinges allow the kitchen panel to slide over the dishwasher door, allowing a minimum kitchen plinth height of 5 cm.



FlexiZone: The ½ load flexizone allows you to wash a reduced load saving energy, water and time and there are no restrictions on where the items are placed.



Noise Level: Excellent insulation and special devices keep noise to a minimum.



The Planetarium washing system, with high rotations per minute, guarantees complete coverage of the tank, thanks to the simultaneous rotation of base and sprayers, and excellent washing results.



Auto 45°- 65°: The auto programme regulates the length of a cycle depending on the need for a pre-wash and the number of rinses required.



Crystals: The Crystals programme is dedicated to delicate dishes such as glasses and china.



Eco: Eco, this economic wash programme uses a low amount of water and energy in order to provide the most environmentally friendly cleaning option.



Mix: The Mix programme is suitable for mixed crockery and everyday pots and pans, without any particular incrustation.



Soak programme: The soak programme provides a rinse to prevent dirt from drying.



Express 27': The Express 27' programme is a quick wash cycle, at low temperatures, for lightly soiled dishes.



Ultraclean: The Ultraclean option performs a final rinse at a high temperature of 70°c eliminating virtually all bacteria.



14 place settings: Number of place settings.





Quick wash cycle for normally soiled mixed loads such as dishes and pans, even with dried-on residues. Dishes are washed and dried in 60 minutes.



Total Acquastop: In addition to the partial Acquastop protection present in all Smeg dishwashers, some models have an electronic device fitted to the water intake hose, which monitors water levels in the machine, detects leaks in the hose and switches off the water supply immediately when necessary.



System WaterSave ensures the best washing results with minimal water consumption depending on the model of dishwasher.



Dishwasher cleaning cycle. The cycle should be started with the machine empty, without dishes. It is recommended to run the program every 2-3 months, using special dishwasher detergents.



SILENT: Wash cycle suitable for normally soiled dishes, even with dried-on residues. Ensures maximum noise reduction and is therefore ideal if you wish to run it during the night.



Allows you to enable additional programs when selected together with any wash cycle. After having selected the required wash cycle, press the button (



The Dry Assist + option, in addition to saving energy, ensures perfect drying of the dishes by opening the door automatically at the end of the washing cycle.



Energy efficiency class B



HYGIENE 99.9% High-temperature washing programme. The 75° rinse guarantees the removal of 99.9% of germs and bacteria.



The work aimed at continuous improvement has allowed the creation of the second generation of the Inverter motor 2.0, characterised by greater efficiency and durability over time, which allows very high performance and a lower energy consumption and noise level.



